



REV.	ECN NO.	REVISED	DATE

NOTE:

1.MATERIAL:

- a.HOUSING:PA9T BLACK
b.CONTACT:PHOSPHOR BRONZE
c.SPRING: STAINLESS STEEL
(SURFACE PLATING: Au 1u")
SEE ORDERING

INFORMATION

2.ELECTRIC:

- a.CONTACT RESISTANCE: 30 MILLIOHMS MAX
b.INSULATION RESISTANCE: 100 MEGA OHMS
MIN
c.DIELECTNIC VOLTAGE: 500V AC ONE SEC
LEVEL
d.OPERATING TEMPERATURE: -25°C~ +85°C

ORDERING INFORMATION

BH-AAA-B5AA005

电池盒

电池型号

SMT 180° TYPE

PLATING:

A-Au1U"
J-Ni100U"~120U"
K-Sn100U"~120U"





MATERIAL:

1A-PBT BLACK
1B-PA66 BLACK
2A-PPA BROWN
2B-PPA BLACK
3A-PPS BROWN
3B-PPS BLACK
4A-LCP WHITE
4B-LCP BLACK
5A-PA9T BLACK


工程部

2022-10-12

LQ. HUANG

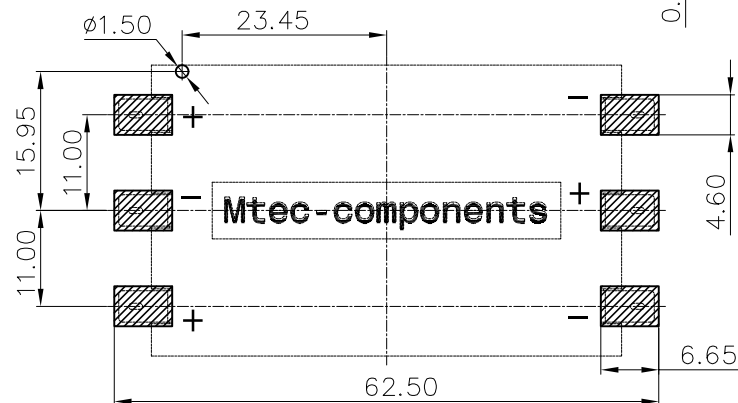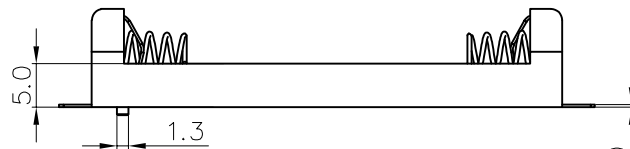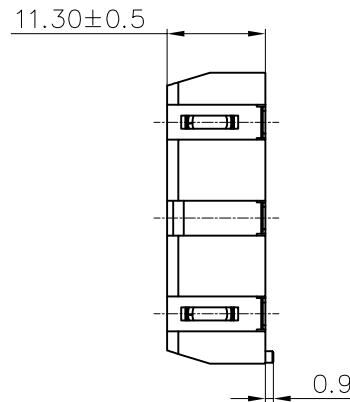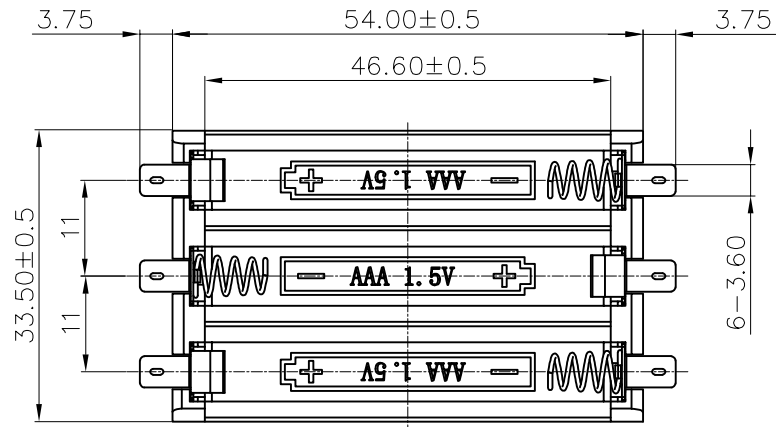

PCB Layout Diagram
Bottom View

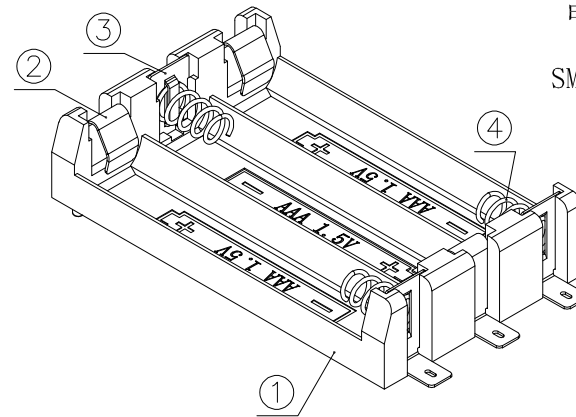

4	SPRING	3	SUS SPRING $\phi 0.5$	Au-Plating
3	TERMINAL-	3	PHOSPHOR BRONZE, T=0.3mm	Au-Plating
2	TERMINAL+	3	PHOSPHOR BRONZE, T=0.3mm	Au-Plating
1	HOUSING	1	PA9T BLACK	BLACK
NO.	PART NAME	Q'TY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES		MYOUNG 美用 www.meiyoungdz.com			
DECIMALS: X : ± 0.30 X.X : ± 0.25 X.XX : ± 0.20 X.XXX : ± 0.10	ANGLES: X : $\pm 1^\circ$ X.X : $\pm 0.5^\circ$	DSND YangFeng	DATE 2022-10-12	TITLE:	
		CHKD ZhouRuicai	DATE 2022-10-12	PART NO.:	
		APVD XueShunyang	DATE 2022-10-12	BH-AAA-B5AA005	
WEIGHT:		SCALE:	SIZE: A4	VIEW:	
SHEET 1 OF 1		UNIT: mm	REV.: A/0	OBJECT: MY	DRAW NO.:MY-CP-0241