

## Switchmode Dual Schottky Barrier Power Rectifiers

Using the Schottky Barrier principle with a Refractory metal capable of high temperature operation metal. The proprietary barrier technology allows for reliable operation up to 150°C junction temperature. Typical application are in switching Mode Power Supplies such as adaptators, DC/DC convertes, free-wheeling and polarity protection diodes.

### Features

- \* Low Forward Voltage.
- \* Low Switching noise.
- \* High Current Capacity
- \* Guarantee Reverse Avalanche.
- \* Guard-Ring for Stress Protection.
- \* Low Power Loss & High efficiency.
- \* 150°C Operating Junction Temperature
- \* Low Stored Charge Majority Carrier Conduction.
- \* Plastic Material used Carries Underwriters Laboratory

### Mechanical Data


- \* Case :JEDEC TO-220AB molded plastic body
- \* Termals:Plated lead,solderable per MIL-STD-750, Method 2026
- \* Polarity:As marked
- \* Mounting Torque: 5 in-lbs. Max.
- \* Weight:1.88 g approx.

Plating pb free is indicated by box




### SCHOTTKY BARRIER RECTIFIERS

**10 AMPERES  
60 VOLTS**



TO-220AB

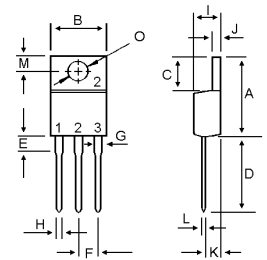

DIM	MILLIMETERS	
	MIN	MAX
A	14.68	15.32
B	9.78	10.42
C	5.02	6.52
D	13.06	14.62
E	3.57	4.07
F	2.42	2.66
G	1.20	1.47
H	0.72	0.96
I	4.22	4.98
J	1.14	1.38
K	2.20	2.98
L	0.33	0.55
M	2.48	2.98
O	3.70	3.90

## MAXIMUM RATINGS


Characteristic	Symbol	MBR1060CT	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	$V_{RRM}$ $V_{RWM}$ $V_R$	60	V
RMS Reverse Voltage	$V_{R(RMS)}$	42	V
Average Rectifier Forward Current Total Device (Rated $V_R$ ),	$I_{F(AV)}$	5 10	A
Peak Repetitive Forward Current (Rate $V_R$ , Square Wave, 20kHz)	$I_{FM}$	10	A
Non-Repetitive Peak Surge Current (Surge applied at rate load conditions halfware, single phase, 60Hz)	$I_{FSM}$	125	A
Operating and Storage Junction Temperature Range	$T_J, T_{stg}$	-65 to +150	°C

## THERMAL RESISTANCES

Typical Thermal Resistance junction to case	$R_{\theta j-c}$	4.5	°C/W
---	------------------	-----	------

## ELECTRICAL CHARACTERISTICS

Characteristic	Symbol	MBRF1060CT	Unit
Maximum Instantaneous Forward Voltage ( $I_F = 5.0$ Amp $T_C = 25^\circ\text{C}$ ) ( $I_F = 5.0$ Amp $T_C = 125^\circ\text{C}$ )	$V_F$	0.75 0.65	V
Maximum Instantaneous Reverse Current (Rated DC Voltage, $T_C = 25^\circ\text{C}$ ) (Rated DC Voltage, $T_C = 125^\circ\text{C}$ )	$I_R$	0.01 20	mA



# MBR1060CT

FIG-1 FORWARD CURRENT DERATING CURVE

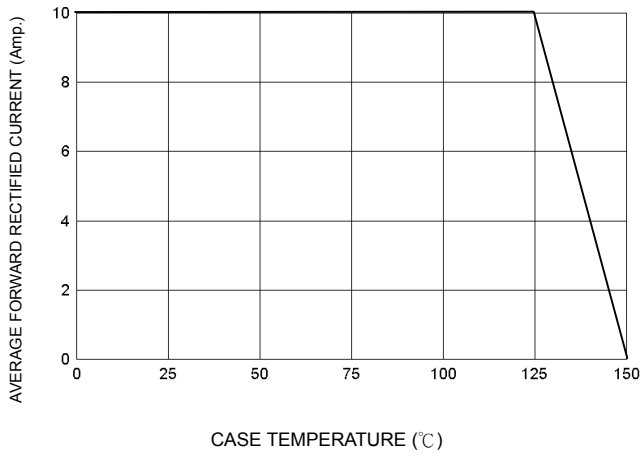


FIG-2 TYPICAL FORWARD CHARACTERISTICS

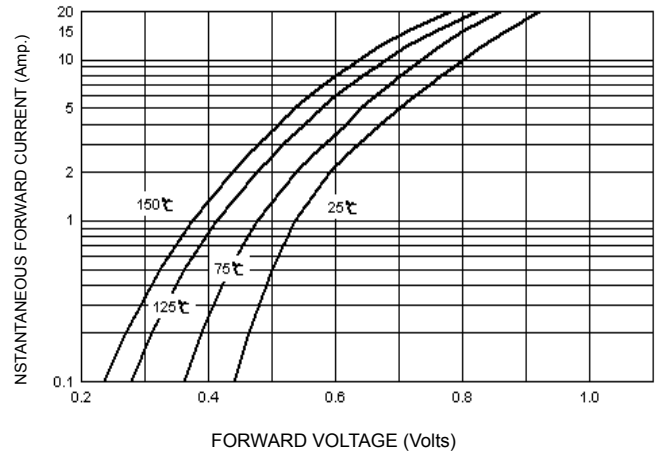


FIG-3 TYPICAL REVERSE CHARACTERISTICS

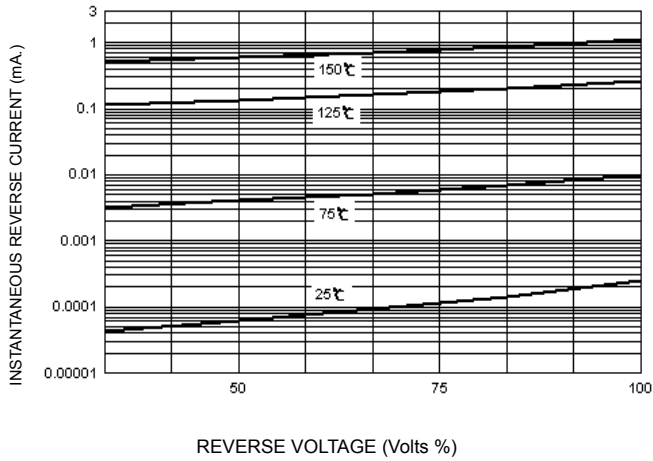


FIG-4 TYPICAL JUNCTION CAPACITANCE

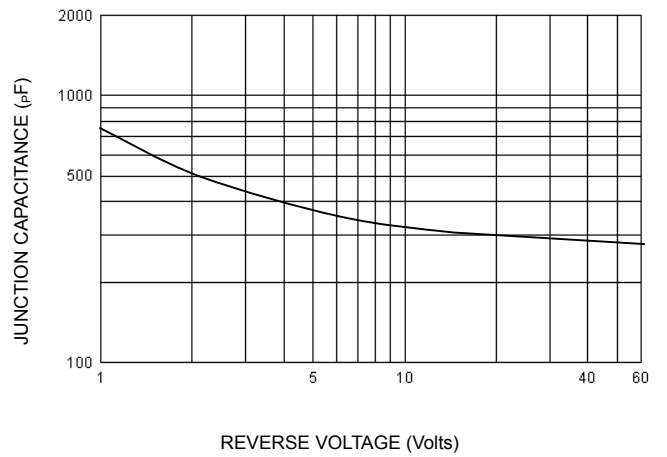


FIG-5 PEAK FORWARD SURGE CURRENT

