


RPC-1.85

Open Circuit
Plug

08S12L-000S3

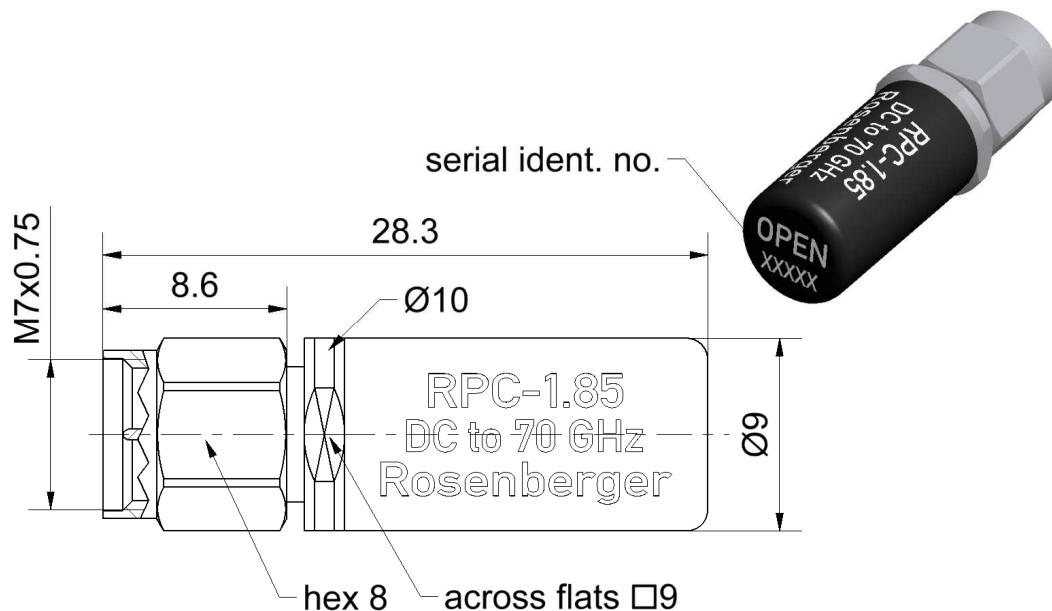

All dimensions are in mm; tolerances according to ISO 2768 m-H

Interface

According to
Mechanically compatible with

IEC 61169-32
RPC-2.40

Documents

Application note

AN001 "Calibration Services"

Material and plating

Connector parts

Center conductor
Outer conductor
Coupling nut
Dielectric

Material

Beryllium copper
Stainless steel
Stainless steel
PS

Plating

Gold, min. 1.27 µm, over nickel
Passivated
Passivated

Electrical data

Frequency range	DC to 70 GHz
Return loss	≤ 0.20 dB, DC to 4 GHz ≤ 0.30 dB, 4 GHz to 40 GHz ≤ 0.40 dB, 40 GHz to 70 GHz
Error from nominal phase ¹	$\leq 2.0^\circ$, DC to 4 GHz $\leq 5.0^\circ$, 4 GHz to 40 GHz $\leq 8.0^\circ$, 40 GHz to 70 GHz

¹ The nominal phase is defined by the Offset Delay, the Offset Loss and the Fringing Capacitance

Mechanical data

Mating cycles	≥ 500
Maximum torque	1.65 Nm
Recommended torque	0.90 Nm
Gauge	0.00 mm to 0.03 mm

General standard definition

For proper operation the vector network analyzer (VNA) needs a model describing the electrical behaviour of this calibration standard. The different models, units, and terms used will depend on the VNA type and they will have to be entered into the VNA. All values are based on typical geometry and plating.

Offset Z_0 / Impedance / Z_0	50 Ω
Offset Delay	16.680 ps
Length (electrical) / Offset Length	5.00 mm
Offset Loss	3.75 G Ω /s
Loss	0.0109 dB/ $\sqrt{\text{GHz}}$
Fringing Capacitances ²	

² Fringing Capacitances are determined individually for each Open Circuit and are documented in a Calibration Certificate.

Environmental data

Operating temperature range ³	+20 °C to +26 °C
Rated temperature range of use ⁴	0 °C to +50 °C
Storage temperature range	-40 °C to +85 °C

RoHS	compliant
------	-----------

³ Temperature range over which these specifications are valid.

⁴ This range is underneath and above the operating temperature range, within the Open Circuit is fully functional and could be used without damage.

Dieses Dokument ist urheberrechtlich geschützt • Rosenberger Hochfrequenztechnik GmbH & Co. KG
RF_35/05.10/6.0

Technical Data Sheet				Rosenberger			
RPC-1.85		Open Circuit Plug		08S12L-000S3			
Declaration of calibration options Factory Calibration Standard delivery for this calibration standard includes a Factory Calibration. The Calibration Certificate issued reports individual calibration results, traceable to national / international standards. Model based standard definitions are individually optimized and reported in an Agilent/Keysight, Rohde & Schwarz and Anritsu compatible VNA format. Accredited Calibration Not available. <i>For further, more detailed information see application note AN001 on the Rosenberger homepage.</i> Calibration interval Recommendation 12 months Packing Standard 1 pce in box Weight 6.8 g/pce							
While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.							
Draft	Date	Approved	Date	Rev.	Engineering change number	Name	Date
Herbert Babinger	26/08/04	Martin Moder	24.03.15	f00	14-1492	Herbert Babinger	24.03.15
Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O.Box 1260 D-84526 Tittmoning Germany www.rosenberger.de				Tel. : +49 8684 18-0 Fax : +49 8684 18-499 Email : info@rosenberger.de			Page 3 / 3