




Series 801 10GBASE-T Cat 6a Ethernet Cordsets

Mighty Mouse High-Speed Back-to-Back Connector with Double-Start ACME Threads

801-046 Ordering Information

801-046: Series 801 Mighty Mouse High-Speed 10GBASE-T Overmolded Cordset

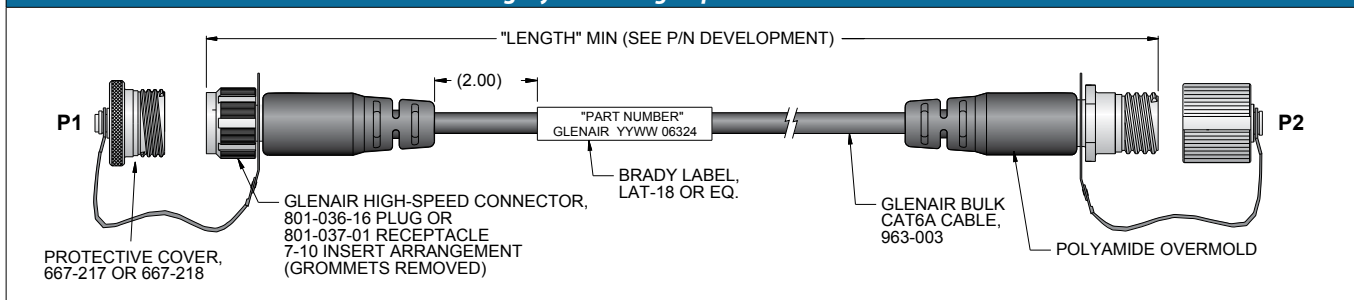

How To Order


Sample Part Number	801-046	-A	D	NF	N	A	-48
Series	801-046 = Back-to-Back eSATA Overmolded cordset.						
P1 Connector	-A = Plug with Pin Contacts -B = Plug with Socket Contacts -C = Receptacle with Pin Contacts -D = Receptacle with Socket Contacts						
P2 Connector	A = Plug with Pin Contacts B = Plug with Socket Contacts C = Receptacle with Pin Contacts D = Receptacle with Socket Contacts N = No Connector (Single-Ended)						
Shell Material / Finish	M = Aluminum / Electroless Nickel RoHS Compliant NF = Aluminum / Cadmium with Olive Drab Chromate ZNU = Aluminum / Zinc-Nickel with Black Chromate MT = Aluminum / Nickel-PTFE, RoHS Compliant Z1 = Stainless Steel / Passivated RoHS Compliant						
Protective Cover	P = Metal Protective Covers Included N = No Covers Supplied						
Shell Key Position (See Table I)	A (Normal), B, C, D, E, F						
Length	Overall Length In Inches						

Table I: Shell Key Positions

Key Position	Key Rotation	
	A°	B°
Normal (A)	150°	210°
B	75°	210°
C	95°	230°
D	140°	275°
E	75°	275°
F	95°	210°

P

WIRING DIAGRAM

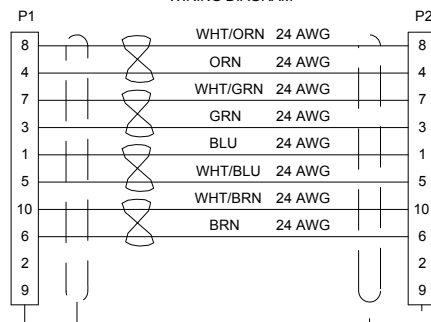

Dimensions in Inches (millimeters) are subject to change without notice.