

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0878390018](#)
Status: **Active**
Description: 1.27mm (.050") Signal Pitch, 0.80mm (.031") SCSI Pitch, 1.27mm (.050") Power Pitch
SAS Receptacle, Vertical, Hybrid, with Straight Solder Tab, 2.36mm (.093") PCB
Thickness, Embossed Tape Packaging, with Cap, 29 Circuits, Lead free

Documents:

[3D Model](#) [Product Specification PS-87839-041 \(PDF\)](#)
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification


CSA LR19980
UL E29179

General

Product Family I/O Connectors
Series [87839](#)
Application Board-to-Board
Comments With pick and place cap
Component Type Receptacle
Product Name SAS
Type N/A

Physical

Boot Color N/A
Circuits (Loaded) 29
Circuits (maximum) 29
Circuits Detail Signal 7, SCSI 7, Power 15
Color - Resin Black
Durability (mating cycles max) 500
Flammability 94V-0
Gender Female
Keying to Mating Part Yes
Lock to Mating Part None
Material - Metal Phosphor Bronze
Material - Plating Mating Gold, Tin
Material - Plating Termination Tin
Material - Resin High Temperature Thermoplastic
Number of Rows 2
Orientation Vertical
PC Tail Length (in) 0.093 In
PC Tail Length (mm) 2.36 mm
PCB Locator Yes
PCB Retention Yes
PCB Thickness Recommended (in) 0.093 In
PCB Thickness Recommended (mm) 2.36 mm
Packaging Type Embossed Tape on Reel
Panel Mount Yes
Pitch - Mating Interface (in) 0.031 In, 0.050 In
Pitch - Mating Interface (mm) 0.80 mm, 1.27 mm
Pitch - Term. Interface (in) 0.031 In, 0.050 In
Pitch - Term. Interface (mm) 0.80 mm, 1.27 mm
Plating min: Mating (µin) 30
Plating min: Mating (µm) 0.76
Plating min: Termination (µin) 102
Plating min: Termination (µm) 2.54

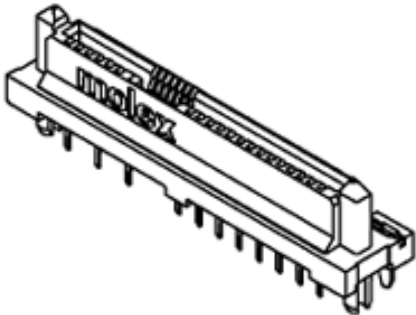

Series

image - Reference only

EU RoHS

**ELV and RoHS
Compliant**

REACH SVHC

Not Reviewed

Halogen-Free

Status

Not Halogen-Free

China RoHS



**Need more information on product
environmental compliance?**

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of
Compliance, [click here](#)

Please visit the [Contact Us](#) section for any
non-product compliance questions.

Search Parts in this Series

[87839Series](#)

Mates With

Device Plugs [87679](#) , [87799](#) , [87703](#) , SFF
8482 Hard Disk Drive and Backplane Plug

Polarized to Mating Part	Yes
Polarized to PCB	Yes
Surface Mount Compatible (SMC)	Yes
Temperature Range - Operating	0°C to +55°C
Termination Interface: Style	Surface Mount, Through Hole
Waterproof / Dustproof	No
Wire Size AWG	N/A

Electrical

Current - Maximum per Contact	1.5A
Shielded	No
Voltage - Maximum	30V

Solder Process Data


Duration at Max. Process Temperature (seconds)	10
Lead-free Process Capability	Reflow Capable (SMT only)
Max. Cycles at Max. Process Temperature	1
Process Temperature max. C	260

Material Info


Reference - Drawing Numbers

Product Specification	PS-87839-041
Sales Drawing	SD-87839-040

This document was generated on 04/09/2010
PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

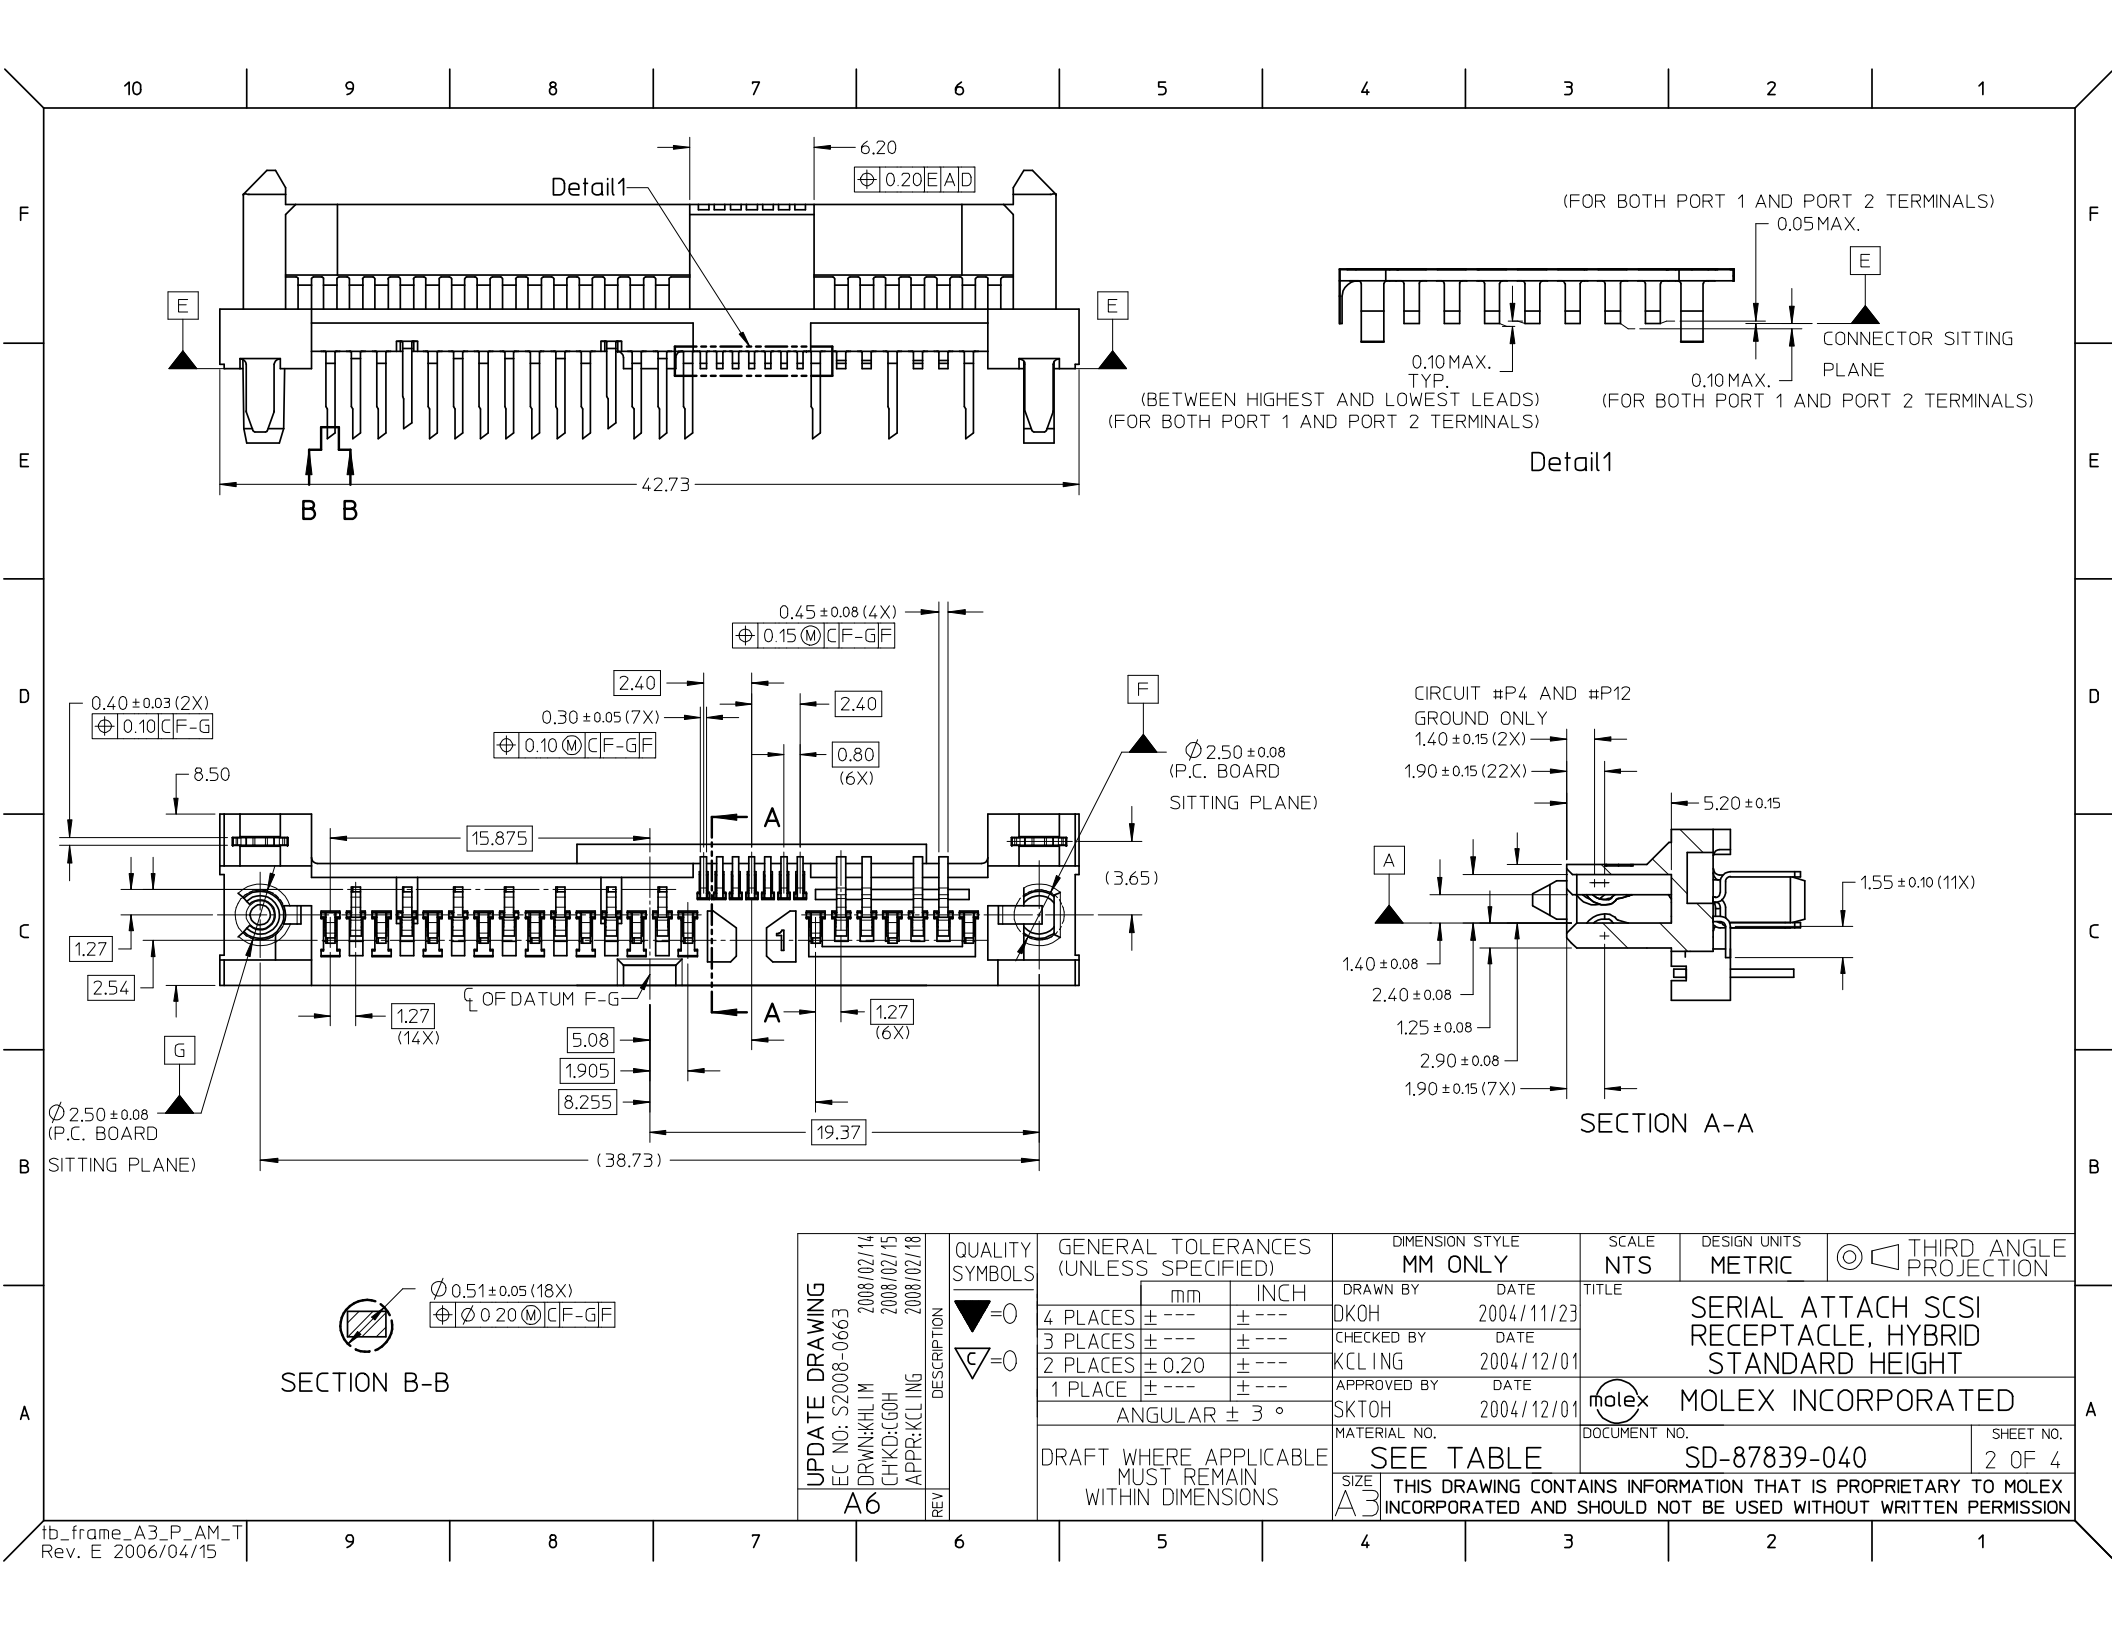


TAPE AND REEL PACKAGING

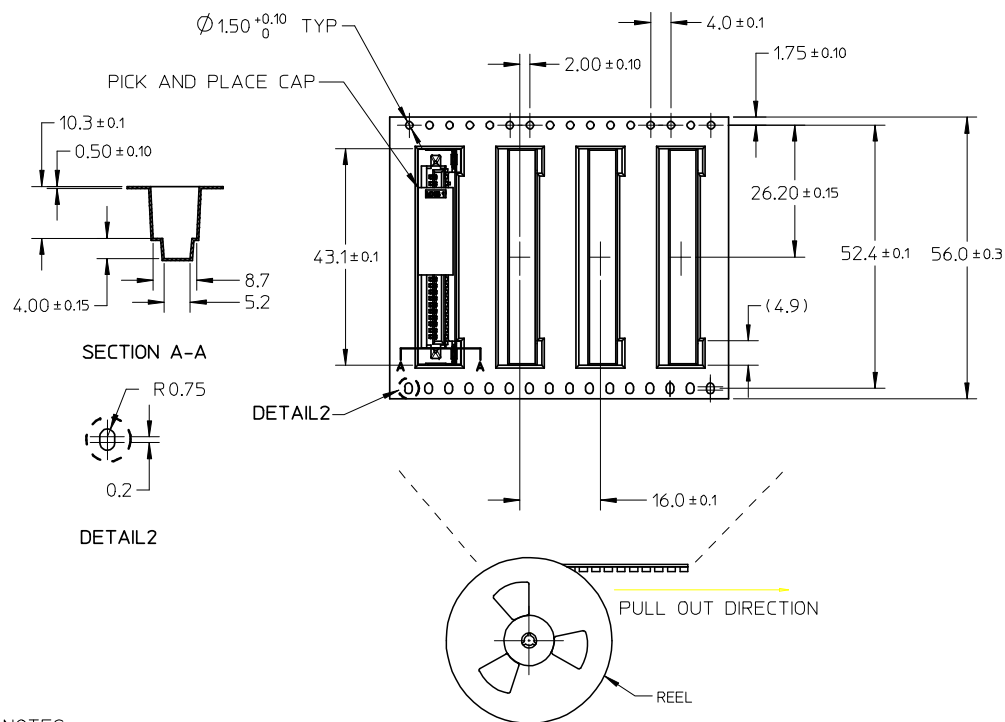


NOTES:

1. LEADER AND TRAILER TAPE

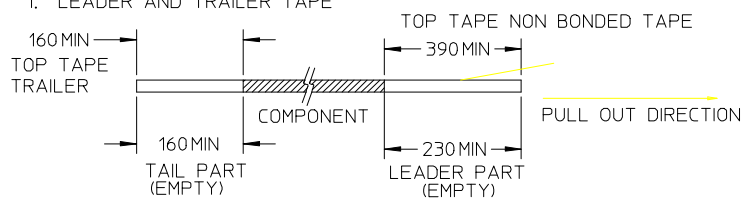


2. PEELING OFF FORCE OF THE TOP TAPE: 80gf MAX.
(PEELING DIRECTION AS SHOWN IN FOLLOWING FIGURE)




3. PACKAGING QTY IS: 350 PCS/REEL
4. PACKAING STANDARD IS AS PER EIA-481.
5. CONNECTOR COMES WITH PICK AND PLACE CAP.

TRAY PACKAGING

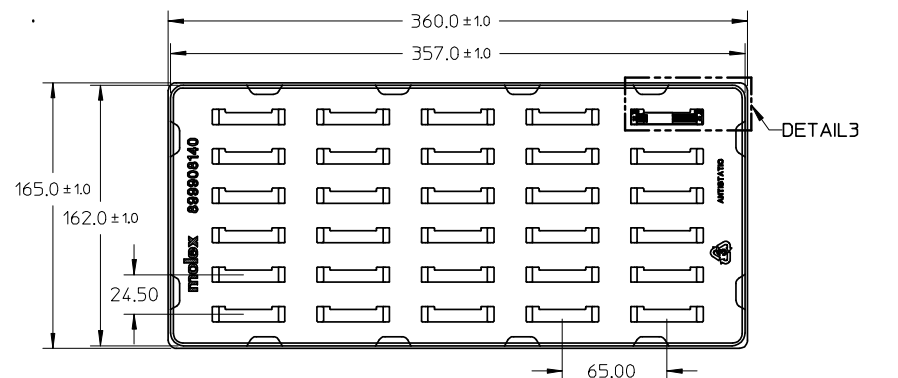

PART ORIENTATION IN TRAY



DETAIL3

NOTES:

1. PACKAGING QTY: 30PCS/TRAY
2. NO PICK AND PLACE CAP

UPDATE DRAWING EC NO: S2008-0663 2008/02/14 DRW:KHLIM 2008/02/15 CHKD:CGH 2008/02/18 APPR:KCLING	QUALITY SYMBOLS ▽=0 ◻=0	GENERAL TOLERANCES (UNLESS SPECIFIED) <table><tr><td></td><td>mm</td><td>INCH</td></tr><tr><td>4 PLACES</td><td>± ---</td><td>± ---</td></tr><tr><td>3 PLACES</td><td>± ---</td><td>± ---</td></tr><tr><td>2 PLACES</td><td>± 0.20</td><td>± ---</td></tr><tr><td>1 PLACE</td><td>± ---</td><td>± ---</td></tr><tr><td colspan="3">ANGULAR ± 3 °</td></tr></table>		mm	INCH	4 PLACES	± ---	± ---	3 PLACES	± ---	± ---	2 PLACES	± 0.20	± ---	1 PLACE	± ---	± ---	ANGULAR ± 3 °			DIMENSION STYLE MM ONLY		SCALE NTS	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION
				mm	INCH																				
			4 PLACES	± ---	± ---																				
			3 PLACES	± ---	± ---																				
			2 PLACES	± 0.20	± ---																				
1 PLACE	± ---	± ---																							
ANGULAR ± 3 °																									
DESCRIPTION A6	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		DRAWN BY DKOH		DATE 2004/11/23	TITLE SERIAL ATTACH SCSI RECEPTACLE, HYBRID STANDARD HEIGHT																			
			CHECKED BY KCLING		DATE 2004/12/01																				
			APPROVED BY SKTOH		DATE 2004/12/01	molex MOLEX INCORPORATED																			
			MATERIAL NO. SEE TABLE		DOCUMENT NO. SD-87839-040			SHEET NO. 4 OF 4																	
		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																							