PASTERNACK®
www.pasternack.com

75 Ohm BNC Female Bulkhead Isolated Ground Connector Solder Attachment Solder Cup Terminal, .350 inch D Hole



TECHNICAL DATA SHEET PE4626

75 Ohm BNC Female Bulkhead Isolated Ground Connector Solder Attachment Solder Cup Terminal, .350 inch D Hole

Configuration

Connector	BNC Female
Connector Interface Type	Solder Cup
Cable Attachment Method (Shield/Contact)	Solder
Body Style	Straight
Mount Method	Bulkhead
Isolated Ground / Hermetic	Isolated Ground

Electrical Specifications

Frequency Range, MHz	DC to 1,000
Impedance, Ohms	75
Maximum VSWR	1.3:1
Maximum Operating Voltage, Volts	500
Dielectric Withstanding Voltage, Vrms	1,500

Mechanical Specifications

Temperature

Operating Range, deg C	-40 to +60

Size

Length, in [mm]	1.18 [29.97]
Width/Dia., in [mm]	0.5 [13]
Weight, lbs [g]	0.013 [5.9]

Connector

Type	BNC Female
Contact Material and Plating	Brass, Gold
Body Material and Plating	Brass, Nickel
Body Plating Specification	100µ in. minimum
Dielectric Type	ABS

Compliance Certifications (visit www.Pasternack.com for current document)

RoHS Compliant	Yes

Plotted and Other Data

Notes:	Values at 25 °C, sea level

Click the following link (or enter part number in “SEARCH” on website) to obtain additional part information including price, inventory and certifications: 75 Ohm BNC Female Bulkhead Isolated Ground Connector Solder Attachment Solder Cup Terminal, .350 inch D Hole PE4626

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623
Phone: (866) 727-8376 or (949) 261-1920 • **Fax:** (949) 261-7451
Sales@Pasternack.com • Techsupport@Pasternack.com

ISO 9001 : 2008 Registered

© 2013 Pasternack Enterprises All Rights Reserved

PASTERNACK®
www.pasternack.com

75 Ohm BNC Female Bulkhead Isolated Ground Connector Solder Attachment Solder Cup Terminal, .350 inch D Hole



TECHNICAL DATA SHEET PE4626

75 Ohm BNC Female Bulkhead Isolated Ground Connector Solder Attachment Solder Cup Terminal, .350 inch D Hole from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in “SEARCH” on website) to obtain additional part information including price, inventory and certifications: 75 Ohm BNC Female Bulkhead Isolated Ground Connector Solder Attachment Solder Cup Terminal, .350 inch D Hole PE4626

URL: http://www.pasternack.com/bnc-female-standard-solder-cup-terminal-connector-pe4626-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.


Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623
Phone: (866) 727-8376 or (949) 261-1920 • **Fax:** (949) 261-7451
Sales@Pasternack.com • Techsupport@Pasternack.com

ISO 9001 : 2008 Registered

© 2013 Pasternack Enterprises All Rights Reserved

PE4626 CAD Drawing

75 Ohm BNC Female Bulkhead Isolated Ground Connector Solder Attachment Solder Cup Terminal, .350 inch D Hole

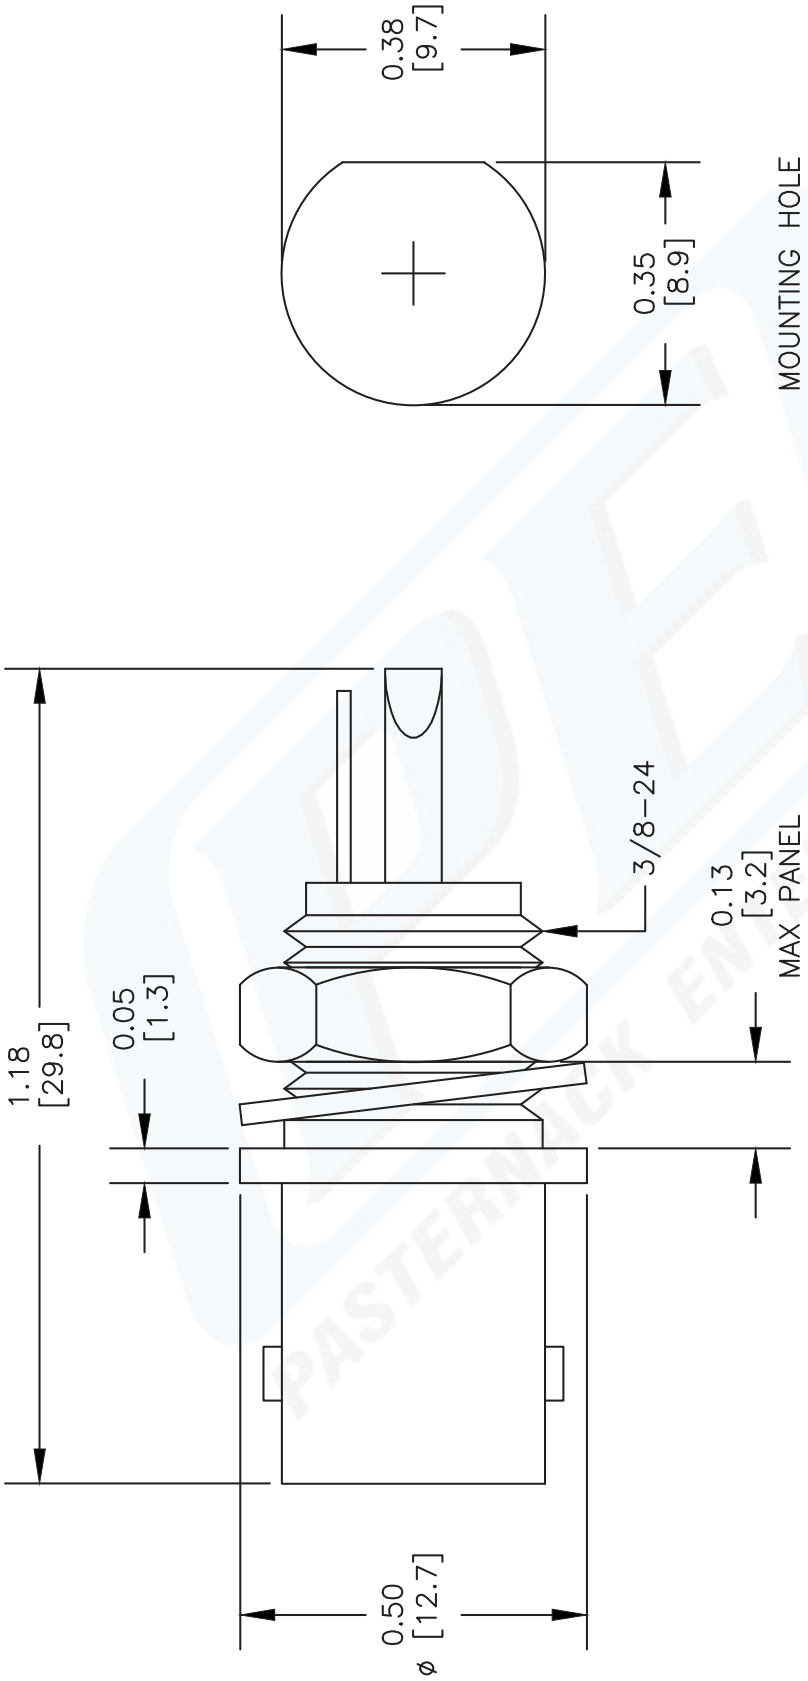

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE **PE4626**

REV. A	FSCM NO. 53919	CAD FILE 020812	SCALE N/A	SIZE A	2233

PASTERNACK®
Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | **Fax:** (949) 261-7451
Website: www.pasternack.com | **E-Mail:** sales@pasternack.com

© 2013 Pasternack Enterprises All Rights Reserved