

Surface Mount General Purpose Silicon Rectifiers

Reverse Voltage - 50 to 1000 V

Forward Current - 2 A

FEATURES

- For surface mounted applications
- Low profile package
- Glass Passivated Chip Junction
- Ideal for automated placement
- Lead free in comply with EU RoHS 2011/65/EU directives

MECHANICAL DATA

- Case: SOD-123FL
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 15mg 0.0053oz

PINNING

PIN	DESCRIPTION
1	Cathode
2	Anode



Top View
Marking Code 2F1-2F7
Simplified outline SOD-123FL and symbol

Maximum Ratings and Electrical characteristics

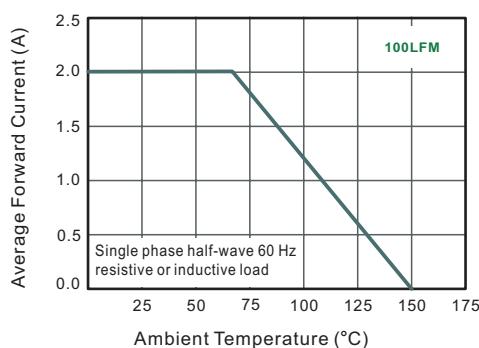
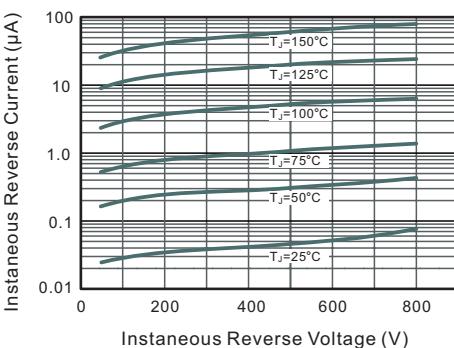
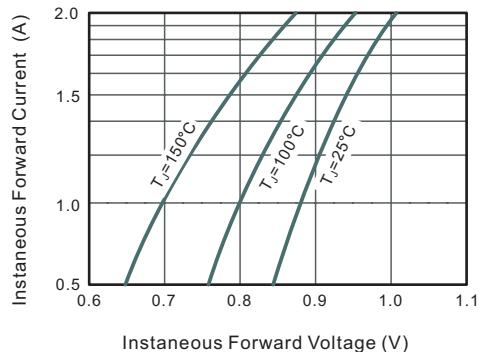
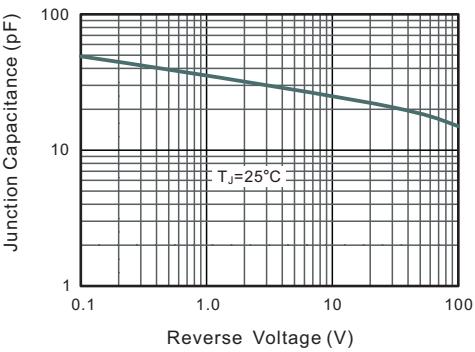
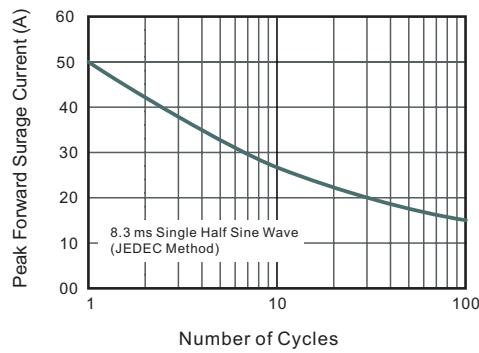
Ratings at 25 °C ambient temperature unless otherwise specified.

Single phase half-wave 60 Hz, resistive or inductive load, for capacitive load current derate by 20 %.

Parameter	Symbols	S2AW	S2BW	S2DW	S2GW	S2JW	S2KW	S2MW	Units
Maximum Repetitive Peak Reverse Voltage	V _{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS voltage	V _{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V _{DC}	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current at Ta = 65 °C	I _{F(AV)}	2							A
Peak Forward Surge Current 8.3 ms Single Half Sine Wave Superimposed on Rated Load (JEDEC Method)	I _{FSM}	50							A
Maximum Instantaneous Forward Voltage at 2 A	V _F	1.1							V
Maximum DC Reverse Current Ta = 25 °C at Rated DC Blocking Voltage Ta = 125 °C	I _R	5 50							µA
Typical Junction Capacitance ¹⁾	C _j	30							pF
Typical Thermal Resistance ²⁾	R _{θJA}	90							°C/W
Operating and Storage Temperature Range	T _j , T _{stg}	-55 ~ +150							°C

1) Measured at 1 MHz and applied reverse voltage of 4 V D.C

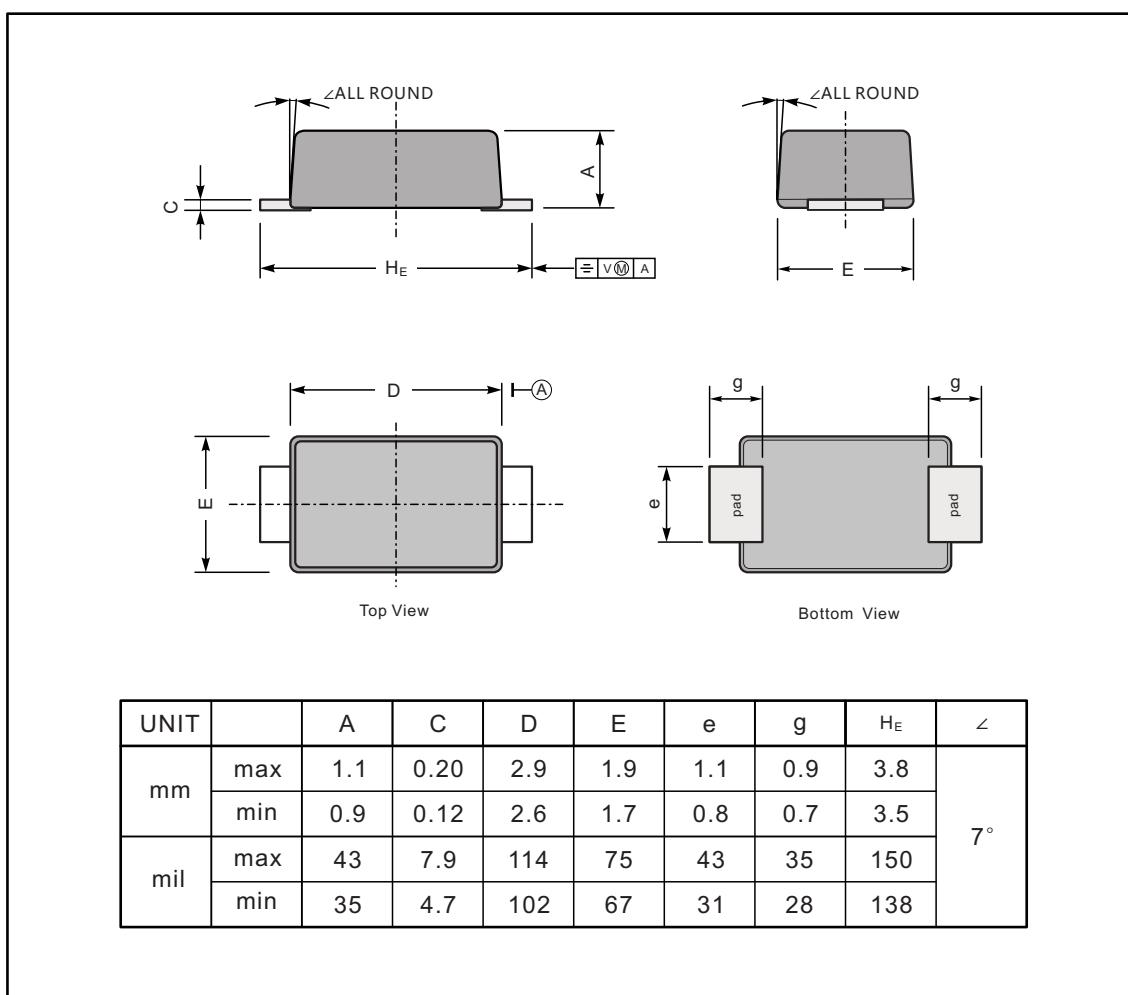
2) P.C.B. mounted with 0.2 X 0.2" (5 X 5 mm) copper pad areas.

Fig.1 Forward Current Derating Curve

Fig.2 Typical Instantaneous Reverse Characteristics

Fig.3 Typical Forward Characteristic

Fig.4 Typical Junction Capacitance

Fig.6 Maximum Non-Repetitive Peak Forward Surge Current


PACKAGE OUTLINE

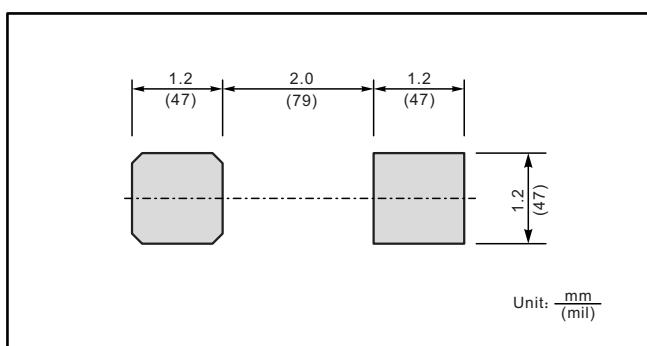
Plastic surface mounted package; 2 leads

SOD-123FL



UNIT		A	C	D	E	e	g	H _E	∠
mm	max	1.1	0.20	2.9	1.9	1.1	0.9	3.8	7°
	min	0.9	0.12	2.6	1.7	0.8	0.7	3.5	
mil	max	43	7.9	114	75	43	35	150	7°
	min	35	4.7	102	67	31	28	138	

The recommended mounting pad size



Marking

Type number	Marking code
S2AW	2F1
S2BW	2F2
S2DW	2F3
S2GW	2F4
S2JW	2F5
S2KW	2F6
S2MW	2F7