THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION – –, .
© COPYRIGHT – By – ALL RIGHTS RESERVED.

LOC	DIST
AF	50

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	N2	REVISED PER ECO-12-009221	15MAY12	JR	PD
	N3	REVISED PER ECO-13-000154	09JAN13	B.P	YH.M

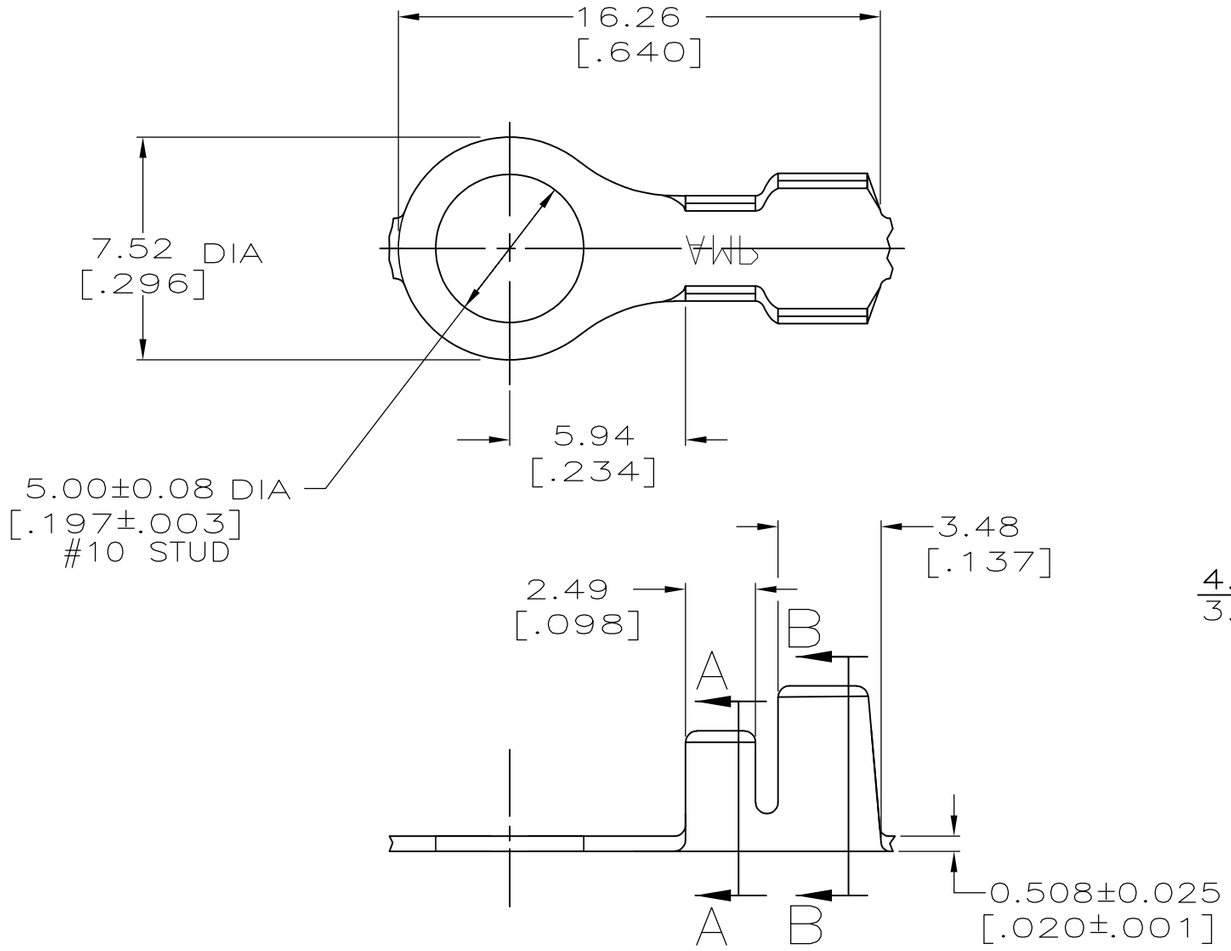

1 CONTINUOUS STRIP ON REEL.

2 P/N 41333-2 IS SAME AS P/N 41333 EXCEPT IS REVERSE REELED.

3 P/N 41333-4 IS NICKEL PLATED STEEL.

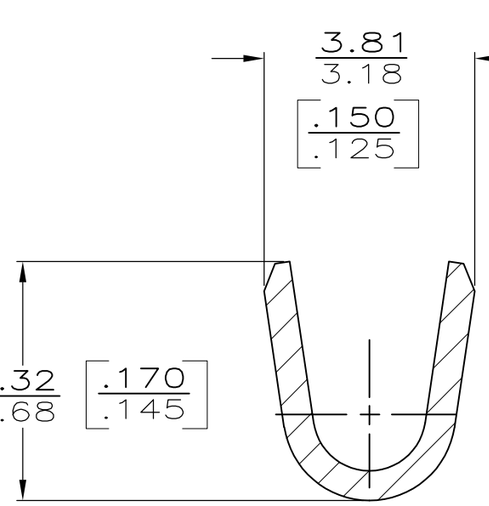

SECTION A-A
SCALE 10:1

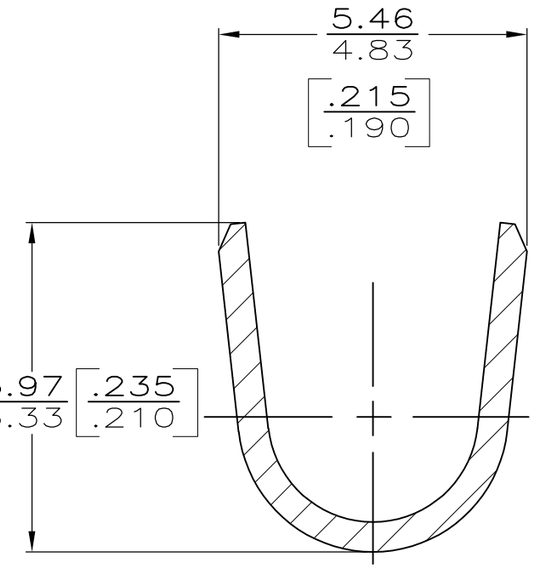

SECTION B-B
SCALE 10:1

3.05-4.32 [.120-.170] DIA	0.8-2.0mm [18-14] AWG	41333-4 ③
		41333-2 ②
		41333
INSULATION RANGE	WIRE RANGE	PART NO.

METRIC

F OR 0	4.57 [.180]	4.06 [.160]	F	3.05 [.120]	2.03 [.080]	2.0 mm² [14]
					1.83 [.072]	1.3 mm² [16]
					1.70 [.067]	0.8 mm² [18]
TYPE	WIDTH	STRIP LENGTH ±0.38 [±.015]	TYPE	WIDTH	±0.051 [±.002] HEIGHT	WIRE
INSUL BARREL CRIMP			WIRE BARREL CRIMP			

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm[INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	± –
1 PLC	± –
2 PLC	± 0.25 [.010]
3 PLC	± –
4 PLC	± –
ANGLES	± –

MATERIAL: 082 BRASS

FINISH: TIN

DWN B.P	1/09/13
CHK F.M	1/11/13
APVD YH.M	1/15/13
PRODUCT SPEC	–
APPLICATION SPEC	–
WEIGHT	–

TE Connectivity

NAME: RING – –

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-41333	–

CUSTOMER DRAWING | SCALE 5:1 | SHEET 1 OF 1 | REV N3