



RLTMGL-589 / 1~50 mW

LD PUMPED ALL-SOLID-STATE YELLOW LASER AT 589nm

All solid state laser at 589nm is made features of ultra compact, long lifetime, low cost and easy operating, which is used in scientific experiment, optical sensor, measurement, instrument, communication, spectrum analysis, etc.



SPECIFICATIONS









Wavelength (nm)	589 ± 2		
Output power (mW)	>1, 2, 10, ...,50		
Transverse mode	Near TEM ₀₀		
Operating mode	CW		
Power stability (rms, over 4 hours)	<10% ,<20%		
Warm-up time (minutes)	<10		
M ² factor	<1.5		
Beam divergence, full angle (mrad)	<1.5		
Beam diameter at the aperture (mm)	~2.0		
Beam height from base plate (mm)	24.8		
Pointing stability after warm-up (mrad)	<0.05		
Operating temperature (°C)	10~35		
Power supply (90-264VAC or 5VDC)	PSU-LED	PSU-FDA	PSU-OEM
Expected lifetime (hours)	10000		
Warranty	1 year		



ROITHNER LASERTECHNIK

Wiedner Hauptstraße 76, A-1040 Vienna, Austria
 Tel.: ++43 1 586 52 43-0, Fax -44, office@roithner-laser.com

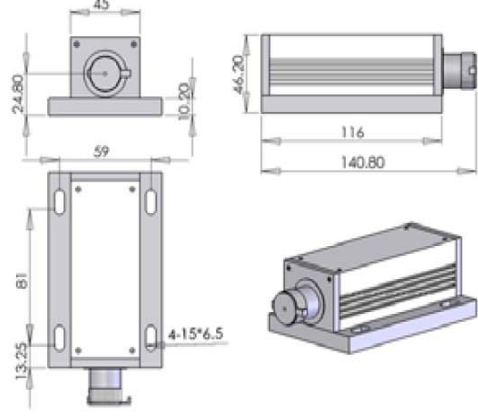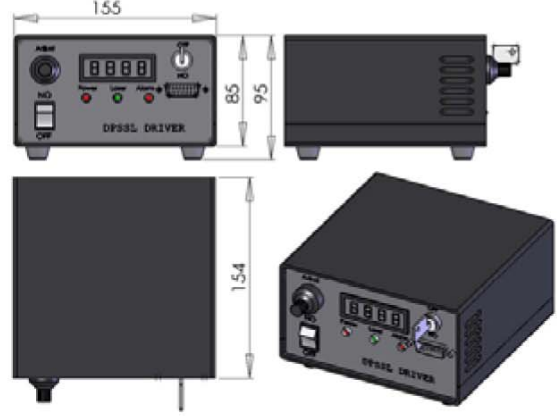
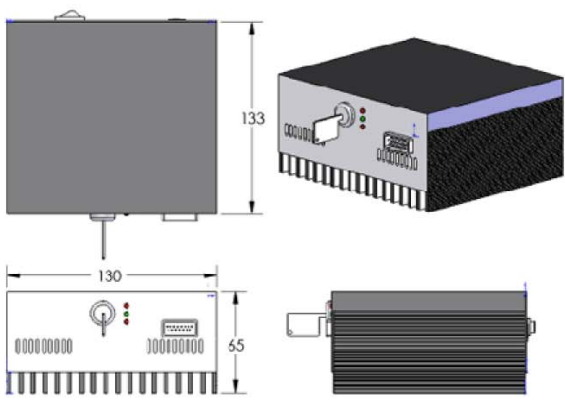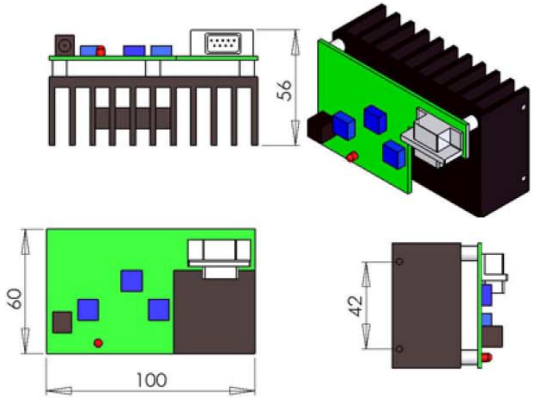
<p style="text-align: center;">MxL-589</p>	<p style="text-align: center;">PSU-LED</p>
<p style="text-align: center;">  </p> <p style="text-align: center;">140. 8(L)×73(W) ×46. 2(H) mm³, 0.6kg</p>	<p style="text-align: center;">  </p> <p style="text-align: center;">154 (L) ×155(W) ×95 (H) mm³, 1.5kg</p>
<p style="text-align: center;">  </p>	<p style="text-align: center;">  </p>
<p style="text-align: center;">PSU-FDA</p>	<p style="text-align: center;">PSU-OEM</p>
<p style="text-align: center;">  </p> <p style="text-align: center;">133 (L) ×130(W) ×65 (H) mm³, 1.2kg</p>	<p style="text-align: center;">  </p> <p style="text-align: center;">100 (L) ×60(W) ×56 (H) mm³, 0.2kg</p>
<p style="text-align: center;">  </p>	<p style="text-align: center;">  </p>