

A

B

C

D

E

F

G

H

A

B

C


D

E

F

G

H

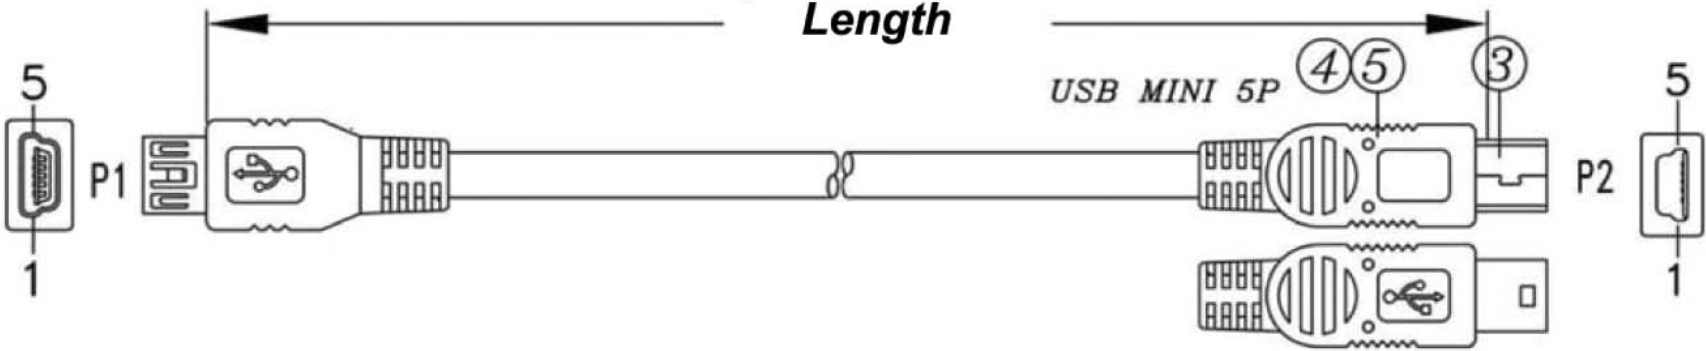


Part Number  
**AK669M-X-R**

Length  
1 1Meter  
2 2Meters

13	PACKING TAPE COLOR YELLOW L=2200mm.			1/100	
12	TRANSPARENT ADHESIVE TAPE L=2600mm.			1/100	
11	CARTON 5 LAYER 40*30*20CM K=K GLUE TYPE			1/100	
10	WATERPROOF BAG (14+15)*24" T=0.04mm.			1/100	
9	PE BAG 230*300*0.04mm PRINT BLACK MADE IN CHINA*+10PCS			1/10	
8	PE BAG 100*200*0.04mm PRINT BLACK MADE IN CHINA*	1		PCS	
7	ROHS LABEL 35*22mm WHITE/BOTTOM TEXT/BLACK		112/100		
6	INNER MODEL LDPE	4		g	
5	OUTER MODEL PVC 45P COLOR BLACK(CS-001)	9		g	
4	ROUND TIN OD.8mm.		0.4	g	
3	USB MINI USB5P/M SOLDER TYPE PLASTIC BLACK	1	P2		
2	USB MINI USB5P/F SOLDER TYPE PLASTIC BLACK	1	P1		
1	USB UL2725 28AW*1P+28AW*2C+AL/MY+D+B0D3.8mm BLACK(CS-001)	01	1	2000mm.	
NO.	PART NO.	DESCRIPTION	VENDER	QTY	UNIT/REF

Electrical test:  
1. 100% short, open, miswire test  
2. Conduct resistance: 2 Ohm(max)  
3. Insulation resistance: 10Mohm(min.)  
4. dielectric test: DC 300V



Scale	1:1	Name				
TOLERANCE		Drawn	10.19.11	Chappell		
X.X	±0.40	Approved				
X.XX	±0.25					
X.XXX	±0.15					
Angle	±3°					
Modification		Date		Name		

Item No.	<b>AK669M-x-R</b>	
Title	Min USB 5P/F to Min USB 5P/M Cable 1,000mm	
Drawing No.		<b>rev00</b>
Replace		
Sheet		

