PASTERNACK®
THE ENGINEER'S RF SOURCE

3 dB NF, 22 dBm P1dB, 10 MHz to 20 GHz, Low Noise Broadband Amplifier, 15 dB Gain, SMA

TECHNICAL DATA SHEET PE15A3272

The PE15A3272 low noise driver amplifier operates across a wide frequency range from 10 MHz to 20 GHz. The design utilizes GaAs PHEMT MMIC technology for high efficiency and high linearity. Typical performance includes 15 dB small signal gain, 3.0 dB noise figure, up to +24 dBm of output power at Psat and +30 dBm output IP3, while using a +12V single DC supply. The design exhibits a very flat gain response across a wide frequency band. Input/output ports are matched for 50 ohms and are DC blocked. The design also incorporates integrated bias sequencing circuitry and voltage regulators to allow for flexible biasing for positive voltage supply. The drop-in package is hermetically sealed with field replaceable SMA connectors and has an operating temperature range of -55°C to +85°C. And for added confidence, this rugged package assembly is designed to meet MIL-STD-883 test conditions for Hermeticity and Temperature Cycle.

Features

- LNA Module
- Extremely wide frequency band
- GaAs PHEMT MMIC Technology
- Gain 15 dB
- High Output IP3 +30 dBm
- Output Psat up to +24 dBm typical
- Regulated Supply and Bias Sequencing
- Hermetically Sealed Module
- Mil Spec Compliant
- Field Replaceable SMA Connectors
- -55°C to +85°C Operating Temperature

Applications

- Electronic Warfare
- Electronic Countermeasures
- Microwave Radio
- VSAT
- Radar
- Fiber Optic
- Space Systems
- Test Instrumentation
- Telecom Infrastructure

Electrical Specifications (TA= 25°C, VDC1 = 12 Vdc)

Description	Minimum	Typical	Maximum	Units
Frequency Range	0.01		20	GHz
Gain		15		dB
Output at 1 dB Compression Point		+22		dBm
Noise Figure		3		dB
Operating DC Voltage 1		12		Volts
Operating Temperature Range (OTR)	-55		+85	°C

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: 3 dB NF, 22 dBm P1dB, 10 MHz to 20 GHz, Low Noise Broadband Amplifier, 15 dB Gain, SMA PE15A3272

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623
Phone: (866) 727-8376 or (949) 261-1920 • **Fax:** (949) 261-7451
Sales@Pasternack.com • Techsupport@Pasternack.com

ISO 9001 : 2008 Registered

© 2016 Pasternack Enterprises All Rights Reserved

PASTERNACK®
THE ENGINEER'S RF SOURCE

3 dB NF, 22 dBm P1dB, 10 MHz to 20 GHz, Low Noise Broadband Amplifier, 15 dB Gain, SMA

TECHNICAL DATA SHEET PE15A3272

Performance by Frequency

Description	Min.	Typ.	Max.	Min.	Typ.	Max.	Min.	Typ.	Max.	Units
Frequency Range		0.010 - 6.0			6.0 - 12.0			12.0 - 20.0		GHz
Gain	14	16		13	15		10	13		dB
Gain Flatness		±0.5			±0.5			±1.0		dB
Gain Variation Over Temperature		0.012	0.02		0.012	0.02		0.012	0.02	dB/ °C
Noise Figure		3			3			4		dB
Input Return Loss		19			17			10		dB
Output Return Loss		14			14			10		dB
Output Power For 1 dB Compression (P1dB)	20	23		19	22		17	20		dBm
Saturated Output Power (Psat)		25			24			22		dBm
Output Third Order Intercept (IP3)		33			30			26		dBm
Saturated Output Voltage		10			10			8		Vpk-pk
Group Delay		±3			±3			±3		ps
Spurious Response		-50			-60			-60		dBc
Supply Current		195			195			195		mA

Mechanical Specifications

Size

Length	0.86 in [21.84 mm]
Width	0.7 in [17.78 mm]
Height	0.29 in [7.37 mm]
Weight	0.059 lbs [26.76 g]
Connector Option	Field Replaceable
Input Connector	SMA Female
Output Connector	SMA Female

Environmental Specifications

Temperature

Operating Range	-55 to +85 deg C
Storage Range	-65 to +150 deg C

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: 3 dB NF, 22 dBm P1dB, 10 MHz to 20 GHz, Low Noise Broadband Amplifier, 15 dB Gain, SMA PE15A3272

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623
Phone: (866) 727-8376 or (949) 261-1920 • **Fax:** (949) 261-7451
Sales@Pasternack.com • Techsupport@Pasternack.com

ISO 9001 : 2008 Registered

© 2016 Pasternack Enterprises All Rights Reserved

3 dB NF, 22 dBm P1dB, 10 MHz to 20 GHz, Low Noise Broadband Amplifier, 15 dB Gain, SMA

TECHNICAL DATA SHEET PE15A3272

Temperature Cycling	MIL-STD-883, Method 101C, Cond B
Hermetic Seal	Gross Leak MIL-STD-883 Method 1014C1/Fine Leak MIL-STD-883, Method 1014A2, 5 x 10-8 atm cc
ESD Sensitivity	ESD Sensitive Material, Transport material in Approved ESD bags. Handle only in ESD Workstation.

Compliance Certifications (visit www.Pasternack.com for current document)

RoHS Compliant

Plotted and Other Data

Notes:

- Values at +25 °C, sea level

Click the following link (or enter part number in “SEARCH” on website) to obtain additional part information including price, inventory and certifications: 3 dB NF, 22 dBm P1dB, 10 MHz to 20 GHz, Low Noise Broadband Amplifier, 15 dB Gain, SMA PE15A3272

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623
Phone: (866) 727-8376 or (949) 261-1920 • **Fax:** (949) 261-7451
Sales@Pasternack.com • Techsupport@Pasternack.com

ISO 9001 : 2008 Registered

© 2016 Pasternack Enterprises All Rights Reserved

3 dB NF, 22 dBm P1dB, 10 MHz to 20 GHz, Low Noise Broadband Amplifier, 15 dB Gain, SMA

TECHNICAL DATA SHEET PE15A3272

Functional Block Diagram

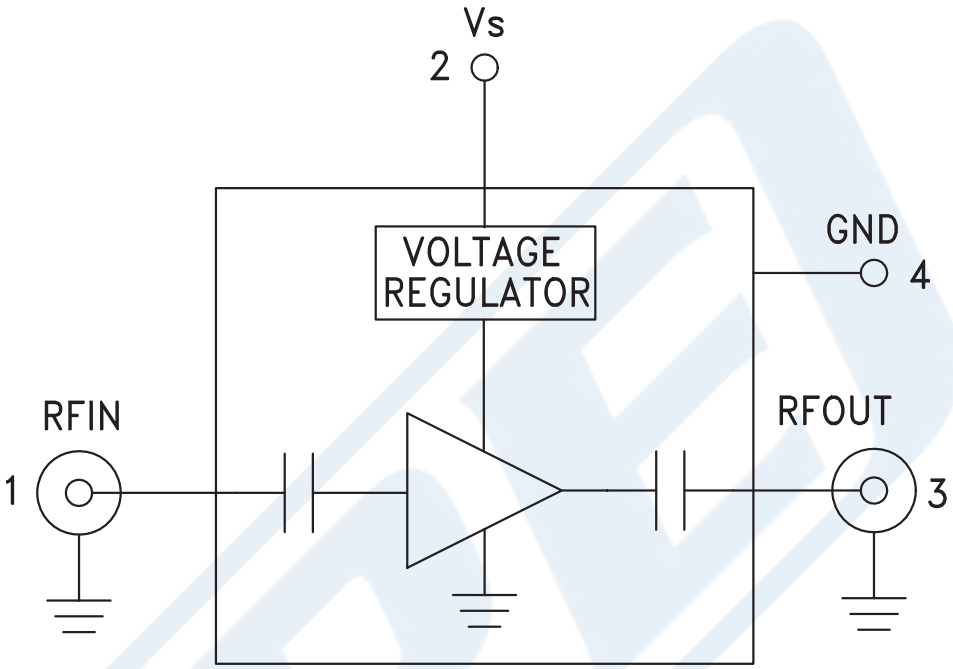

Click the following link (or enter part number in “SEARCH” on website) to obtain additional part information including price, inventory and certifications: 3 dB NF, 22 dBm P1dB, 10 MHz to 20 GHz, Low Noise Broadband Amplifier, 15 dB Gain, SMA PE15A3272

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623
Phone: (866) 727-8376 or (949) 261-1920 • **Fax:** (949) 261-7451
Sales@Pasternack.com • Techsupport@Pasternack.com

ISO 9001 : 2008 Registered

© 2016 Pasternack Enterprises All Rights Reserved

PASTERNACK®
THE ENGINEER'S RF SOURCE

3 dB NF, 22 dBm P1dB, 10 MHz to 20 GHz, Low Noise Broadband Amplifier, 15 dB Gain, SMA

TECHNICAL DATA SHEET PE15A3272

Typical Performance Data

Gain & Return Loss

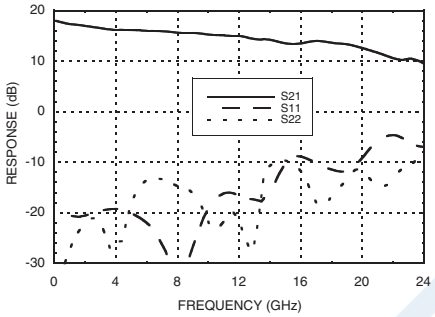

Gain vs. Temperature

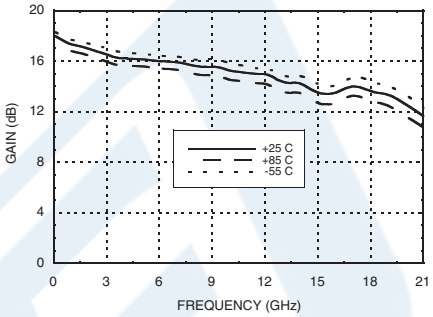

Input Return Loss vs. Temperature

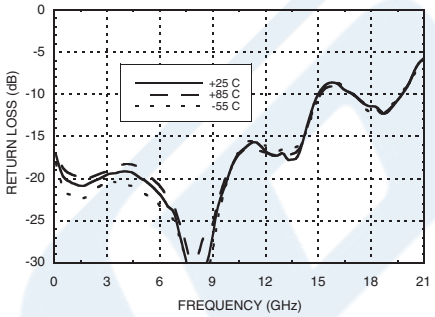

Output Return Loss vs. Temperature

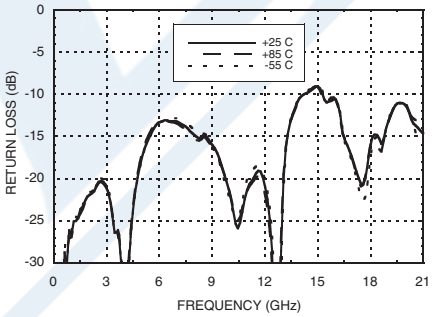

Reverse Isolation vs. Temperature

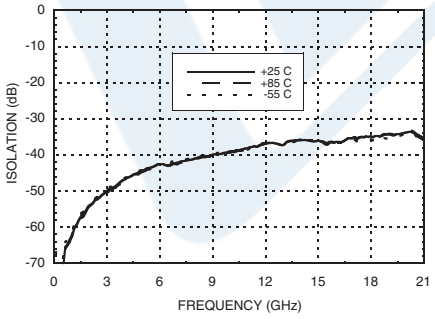

Noise Figure vs. Temperature

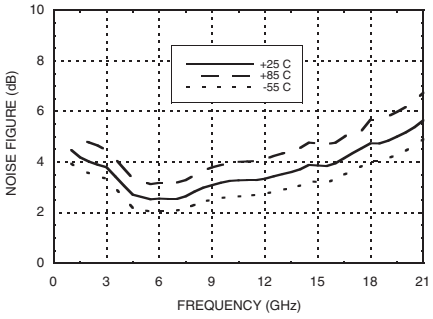

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: 3 dB NF, 22 dBm P1dB, 10 MHz to 20 GHz, Low Noise Broadband Amplifier, 15 dB Gain, SMA PE15A3272

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623
Phone: (866) 727-8376 or (949) 261-1920 • **Fax:** (949) 261-7451
Sales@Pasternack.com • Techsupport@Pasternack.com

ISO 9001 : 2008 Registered

© 2016 Pasternack Enterprises All Rights Reserved

PASTERNACK®
THE ENGINEER'S RF SOURCE

3 dB NF, 22 dBm P1dB, 10 MHz to 20 GHz, Low Noise Broadband Amplifier, 15 dB Gain, SMA

TECHNICAL DATA SHEET PE15A3272

P1dB vs. Temperature

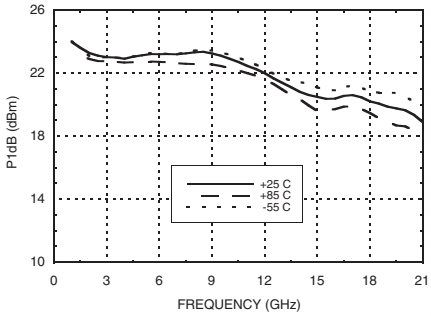

Psat vs. Temperature

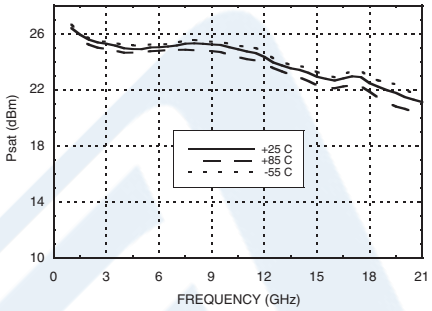

Output IP3 vs. Temperature

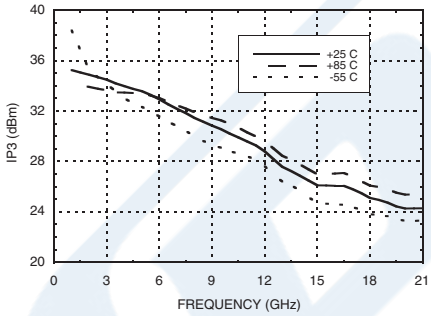

Group Delay

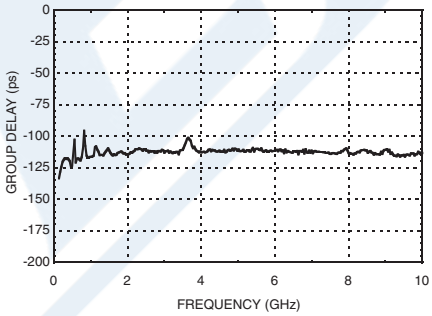

Deviation from Linear Phase

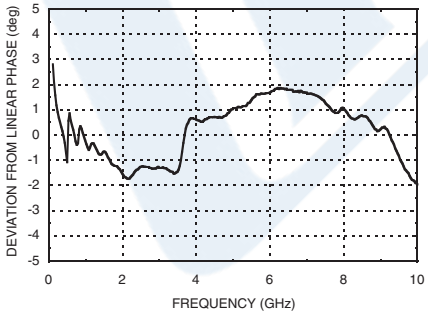

Low Frequency Gain and Return Loss

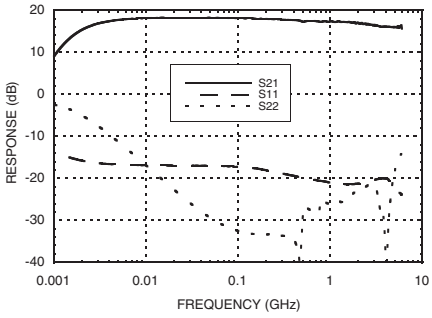

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: 3 dB NF, 22 dBm P1dB, 10 MHz to 20 GHz, Low Noise Broadband Amplifier, 15 dB Gain, SMA PE15A3272

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623
Phone: (866) 727-8376 or (949) 261-1920 • **Fax:** (949) 261-7451
Sales@Pasternack.com • Techsupport@Pasternack.com

ISO 9001 : 2008 Registered

© 2016 Pasternack Enterprises All Rights Reserved

PASTERNACK®
THE ENGINEER'S RF SOURCE

3 dB NF, 22 dBm P1dB, 10 MHz to 20 GHz, Low Noise Broadband Amplifier, 15 dB Gain, SMA

TECHNICAL DATA SHEET PE15A3272

3 dB NF, 22 dBm P1dB, 10 MHz to 20 GHz, Low Noise Broadband Amplifier, 15 dB Gain, SMA from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: 3 dB NF, 22 dBm P1dB, 10 MHz to 20 GHz, Low Noise Broadband Amplifier, 15 dB Gain, SMA PE15A3272

URL: https://www.pasternack.com/3-db-20-ghz-low-noise-broadband-amplifier-15-db-gain-sma-pe15a3272-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623
Phone: (866) 727-8376 or (949) 261-1920 • **Fax:** (949) 261-7451
Sales@Pasternack.com • Techsupport@Pasternack.com

ISO 9001 : 2008 Registered

© 2016 Pasternack Enterprises All Rights Reserved

PE15A3272 CAD Drawing

3 dB NF, 22 dBm P1dB, 10 MHz to 20 GHz, Low Noise
Broadband Amplifier, 15 dB Gain, SMA

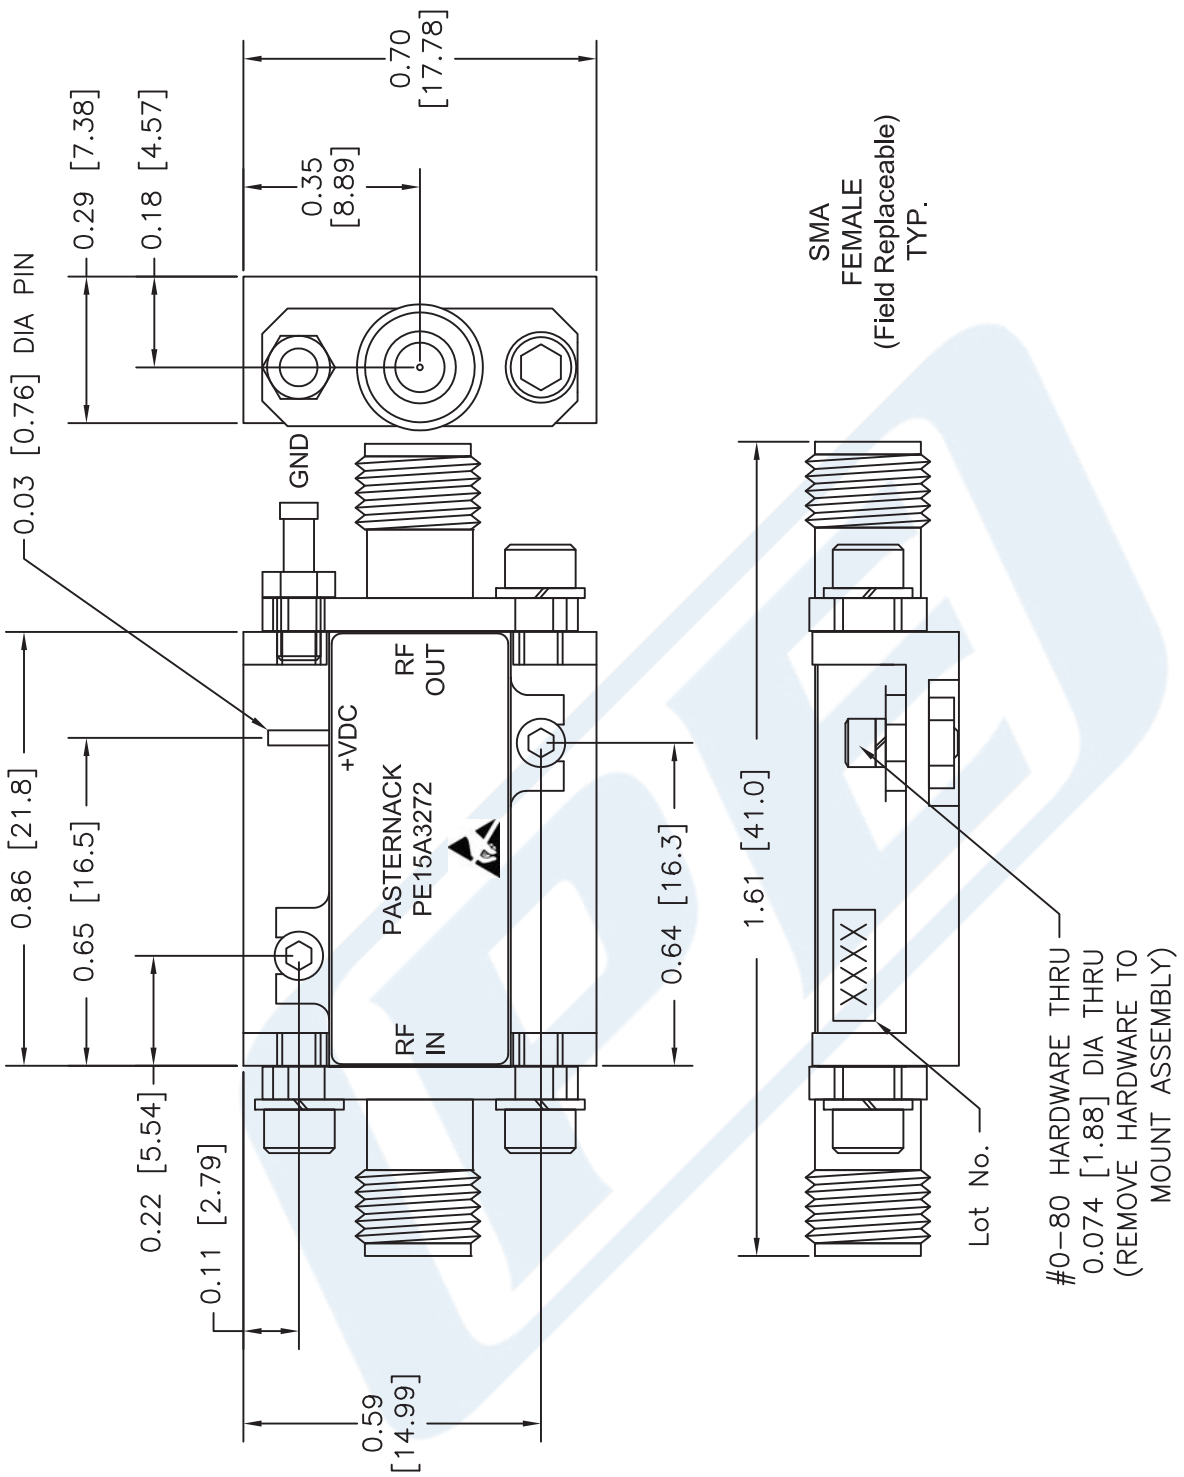

NOTE:
HEAT SINK REQUIRED FOR PROPER OPERATION,
UNIT IS COOLED BY CONDUCTING TO HEAT SINK.

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

CAD FILE	SCALE	SIZE
071916	N/A	A

DWG TITLE: PE15A3272

FSCM NO. 53919

2233

PASTERNACK® THE ENGINEER'S RF SOURCE
Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | **Fax:** (949) 261-7451
Website: www.pasternack.com | **E-Mail:** sales@pasternack.com

© 2016 Pasternack Enterprises All Rights Reserved