

ER18505M: A Size Spiral Cell

Technical Datasheet



Technical Specifications

Part No.	ER18505M (UHR-ER18505)
Cell Type	Primary, non-rechargeable
Chemistry	Lithium Thionyl Chloride
Voltage Range	2.0V to 3.7V
Nominal Voltage	3.6V
Nominal Capacity	3.0Ah @ 1mA to 2.0V @ 23°C
Max. Continuous Discharge Current	600mA continuous
Max. Pulse Discharge Current	Up to 1000mA (life and temperature dependent)
Weight	32g
Operating Temperature	-55°C to 70°C 70°C to 85°C (max of 24 hours)
Storage Temperature ¹	-55°C to 70°C 70°C to 85°C (max of 24 hours)
Exterior/Housing	Stainless steel container
Terminals/Connector	Radial tabs / radial pins / axial leads / flying leads
Transportation ²	A complete description of transportation regulations, lithium weights and transportation classifications is available on the Ultralife website.
Quality Assurance	Ultralife manufacturing facilities are ISO 9001:2008 and ISO 14001:2004 registered. Its products are listed under the Component Recognition Program of Underwriters Laboratories (UL) and have passed UN transportation testing, which is required for international transportation of all lithium batteries.

Notes

- Cells should be stored in temperatures less than 30°C for a shelf-life of greater than five years.
- A complete description of transportation regulations, lithium weights and transportation classifications is available on the Ultralife website.


Features

- High and flat operating voltage
 - High power and higher energy for the whole battery life
- High drain capability
 - Higher power applications
- Low self-discharge rate (<1% per year at 20°C)
 - Battery life higher than 10 years, depending on the application
- Hermetic glass-to-metal sealing
 - Avoid leakage, key for higher than 10 year battery life
- Non-flammable electrolyte
 - Safer operation in case of abuse
- PTC device
 - Safe operation in the event of a short circuit

Typical Applications


- Military and other radio applications
- Alarm and security systems
- Beacons and emergency location transmitters
- GPS
- Metering systems
- Sonobuoys
- LED lighting applications

Dimensions

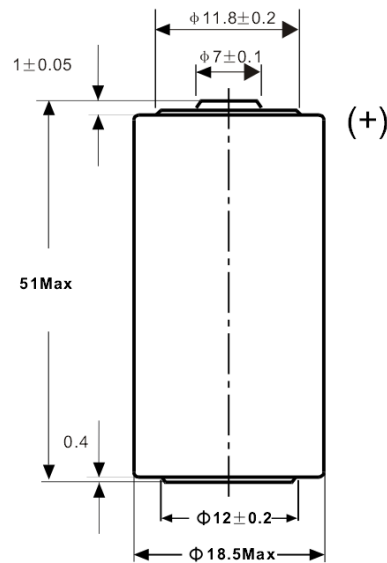


Unit: mm

Typical Performance Graphs

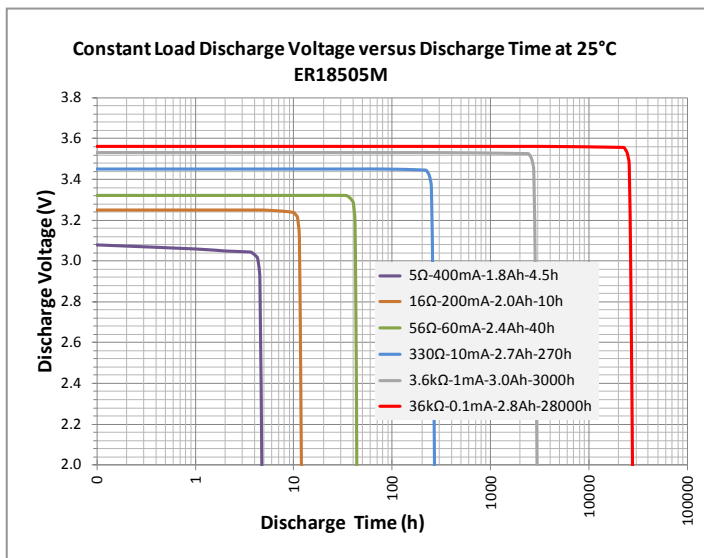

High and flat voltage at high and low drain

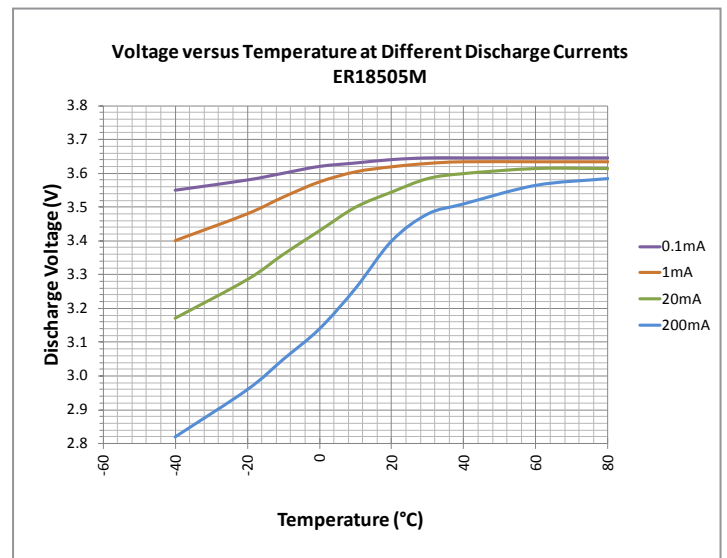

High voltage at high drain even at -30°C

ER18505M

Newark, New York | +1 315-332-7100 | Fax: +1 315-331-7800

©2017 Ultralife Corporation • www.ultralifecorp.com • All information is subject to change without notice.

The information contained herein is for reference only and does not constitute a warranty of performance. • 14 NOV 17 UBM-0064 Rev: B