
KEMET Part Number: P409CE104M275AH330

Film, Metallized Paper, Resistor/Capacitor, P409, 0.1 uF, 20%, 630 V, 85C, Lead Spacing = 20.3mm

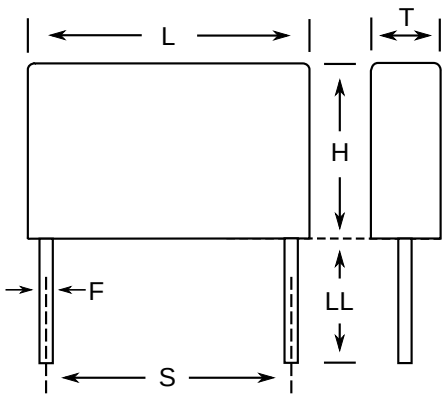

General Information	
Dielectric:	Metallized Paper
Style:	Radial
Series:	P409
Features:	Pulse
RoHS:	Yes
Lead:	Wire Leads
Approvals:	ENEC, UL, cUL
Construction:	Molded
Miscellaneous:	Resistor Tolerance: +/-30%. Resistor= 33 Ohms

Dimensions	
L	24mm MAX
H	14mm MAX
T	7.6mm MAX
S	20.3mm +/-0.4mm
LL	30mm +5mm
F	0.8mm +/-0.05mm

Specifications	
Capacitance:	0.1 uF
Capacitance Tolerance:	20%
Voltage DC:	630 VDC
Voltage AC:	275 VAC
Temperature Range:	-40/+85C
Rated Temperature:	85C
Insulation Resistance:	3 GOhms
Safety Class:	X2

Packaging Specifications	
Packaging:	Bulk
Packaging Quantity:	250

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.

© 2006 - 2017 IntelliData.net