
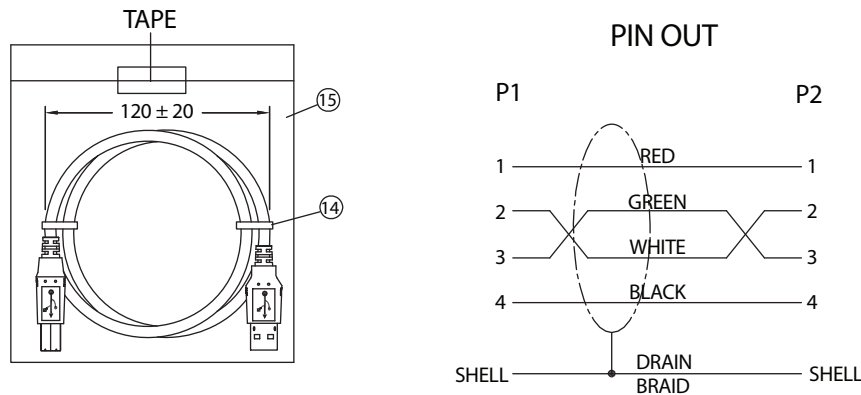


REVISION			
REV.	DESCRIPTION	DATE	APPROVED
A	Changed Cable Loop Dim. From 100mm to 120mm	03-12-07	DP

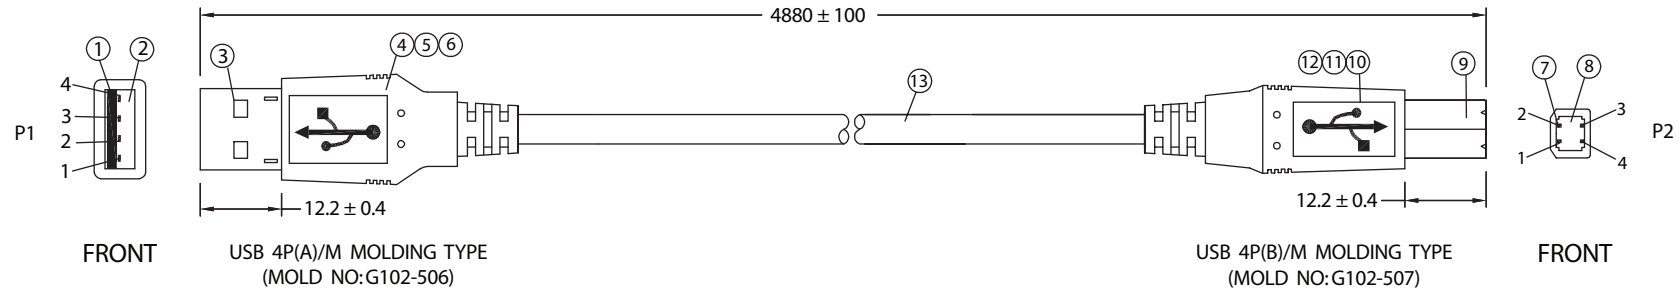

NOTES:

- CABLE: UL2725 24/26AWG
26AWGx1P+24AWGx2C+FOIL+DW+BD
OD: 4.5 ± 0.2, COLOR: BLACK
PRINTING: "E166307 AWM 2725 24/26AWG 80°C 30V VW-1 HI-SPEED USB2.0"
- CONNECTORS: USB 4P(A) MALE TO USB 4P(B) MALE
- HOOD: MOLDED TYPE
- ELECTRICAL TEST:
 - <1>.100% OPEN SHORT & MISS WIRE TEST
 - <2>.INSULATION RESISTANCE: DC400V 10M ohm MIN.
 - <3>.CONDUCTOR RESISTANCE: 1 ohm MAX.
- PACKING: 1PC/POLYBAG

No.	PARTS NAME	SPECIFICATION STANDARD	QTY	REMARKS
①	USB 4P(A)/M - CONTACT	BRASS / GOLD PLATED (CRIMPING TYPE)	4	
②	USB 4P(A)/M - INSULATOR	PBT + G,F / WHITE UL 94V-0	1	
③	USB 4P(A)/M - SHELL 1	STEEL GOLD PLATED	1	
④	USB 4P(A)/M - SHELL 2	STEEL GOLD PLATED	1	
⑤	USB 4P(A)/M - COPPER FOIL	WIDTH 5xLENGTH 27	1	
⑥	USB 4P(A)/M - OUTER MOLD	45P PVC / COLOR: BLACK	1	
⑦	USB 4P(B)/M - CONTACT	BRASS / GOLD PLATED (CRIMPING TYPE)	4	
⑧	USB 4P(B)/M - INSULATOR	PBT + G,F / WHITE UL 94V-0	1	
⑨	USB 4P(B)/M - SHELL 1	STEEL GOLD PLATED	1	
⑩	USB 4P(B)/M - SHELL 2	STEEL GOLD PLATED	1	
⑪	USB 4P(B)/M - COPPER FOIL	WIDTH 5xLENGTH 27	1	
⑫	USB 4P(B)/M - OUTER MOLD	45P PVC / COLOR: BLACK	1	
⑬	CABLE	L01007ABK01A	1	
⑭	MINI TIE	PE / BLACK	2	
⑮	POLYBAG	PE: 0.08x160x180	1	

Dim range (mm)	Tolerance +/- (mm)	Qualtek Electronics Corp. WCT DIVISION											
		Part Number: 3021019-16											
0-1	0.15	Description: USB 4P(A)/M - USB 4P(B)/M											
1-6	0.20	<table border="1" style="width: 100%;"> <tr> <td colspan="2"></td> <td style="text-align: center;">REV. A</td> </tr> <tr> <td>Drawn / Date</td> <td>Checked / Date</td> <td>Approved / Date</td> </tr> <tr> <td>B.Grubb 01-26-07</td> <td>01-26-07</td> <td>JJH / 01-26-07</td> </tr> </table>					REV. A	Drawn / Date	Checked / Date	Approved / Date	B.Grubb 01-26-07	01-26-07	JJH / 01-26-07
					REV. A								
Drawn / Date	Checked / Date				Approved / Date								
B.Grubb 01-26-07	01-26-07				JJH / 01-26-07								
6-18	0.30												
18-50	0.50												
50-120	0.70												
120-250	0.90												
250-500	1.20												