

# SR320 THRU SR3200



## 3.0 AMP SCHOTTKY BARRIER RECTIFIERS



### FEATURES

- \* Low forward voltage drop
- \* High current capability
- \* High reliability
- \* High surge current capability
- \* Epitaxial construction
- \* Both normal and Pb free product are available:
- \* Normal: 80~95%Sn, 5~20%Pb
- \* Pb free: 99 Sn above can meet Rohs environment substance directive request

### MECHANICAL DATA


- \* Case: Molded plastic
- \* Epoxy: UL 94V-0 rate flame retardant
- \* Lead: Axial leads, solderable per MIL-STD-202, method 208 guranteed
- \* Polarity: Color band denotes cathode end
- \* Mounting position: Any
- \* Weight: 1.10 grams

### VOLTAGE RANGE

20 to 200 Volts

### CURRENT

3.0 Ampere

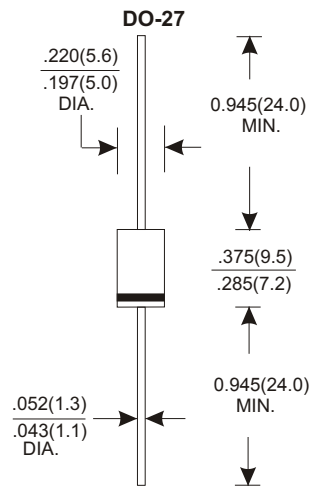

Dimensions in inches and (millimeters)

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating 25°C ambient temperature unieess otherwies specified.  
Single phase half wave, 60Hz, resistive or inductive load.  
For capacitive load, derate current by 20%.

| TYPE NUMBER  | SR320      | SR330 | SR340 | SR360 | SR380      | SR3100 | SR3150 | SR3200 | UNITS |
|--|------------|-------|-------|-------|------------|--------|--------|--------|-------|
| Maximum Recurrent Peak Reverse Voltage   | 20         | 30    | 40    | 60    | 80         | 100    | 150    | 200    | V     |
| Maximum RMS Voltage  | 14         | 21    | 28    | 42    | 56         | 70     | 105    | 140    | V     |
| Maximum DC Blocking Voltage  | 20         | 30    | 40    | 60    | 80         | 100    | 150    | 200    | V     |
| Maximum Average Forward Rectified Current  | 3.0        |       |       |       |            |        |        |        | A     |
| See Fig. 1   |            |       |       |       |            |        |        |        |       |
| Peak Forward Surge Current, 8.3 ms single half sine-wave superimposed on rated load (JEDEC method) | 80         |       |       |       |            |        |        |        | A     |
| Maximum Instantaneous Forward Voltage at 3.0A  | 0.55       |       | 0.70  |       | 0.75       |        |        |        | V     |
| Maximum DC Reverse Current   | Ta=25°C    |       |       |       | 0.2        |        |        |        | mA    |
| at Rated DC Blocking Voltage   | Ta=100°C   |       |       |       | 30         |        |        |        | mA    |
| Typical Junction Capacitance (Note1)   | 250        |       |       |       |            |        |        |        | pF    |
| Typical Thermal Resistance R JA (Note 2)   | 20         |       |       |       |            |        |        |        | °C/W  |
| Operating Temperature Range Tj   | -65 — +125 |       |       |       | -65 — +150 |        |        |        | °C    |
| Storage Temperature Range TSTG   | -65 — +150 |       |       |       |            |        |        |        | °C    |

#### NOTES:

1. Measured at 1MHz and applied reverse voltage of 4.0V D.C.
2. Thermal Resistance Junction to Ambient Vertical PC Board Mounting 0.5"(12.7mm) Lead Length.

## RATING AND CHARACTERISTIC CURVES (SR320 THRU SR3200)

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

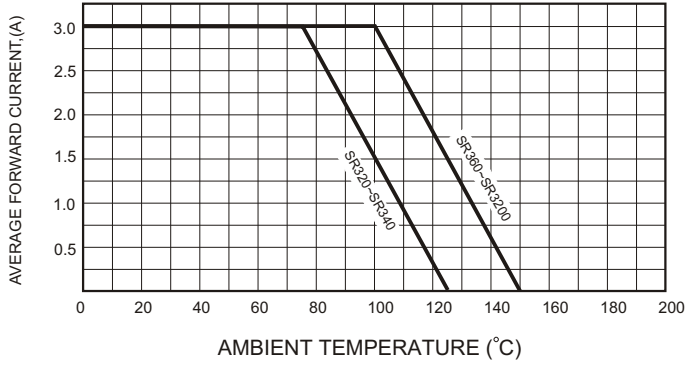


FIG.2-TYPICAL FORWARD CHARACTERISTICS

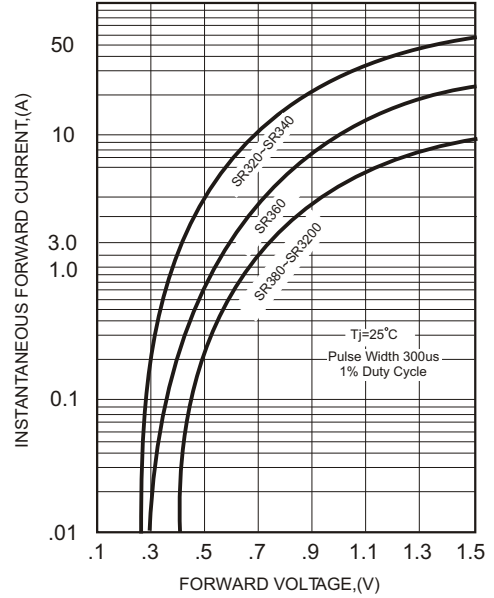


FIG.3-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

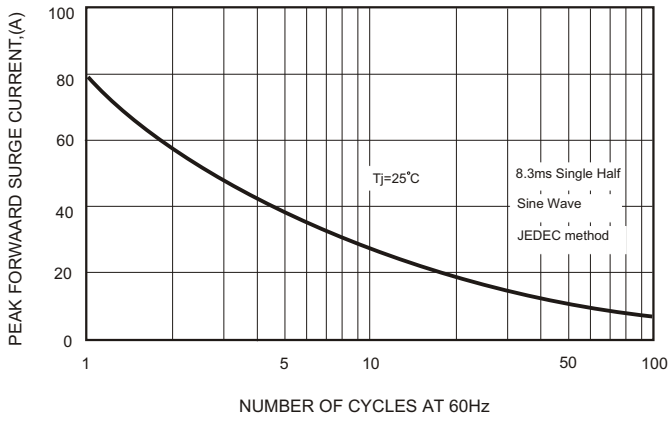


FIG.4-TYPICAL JUNCTION CAPACITANCE

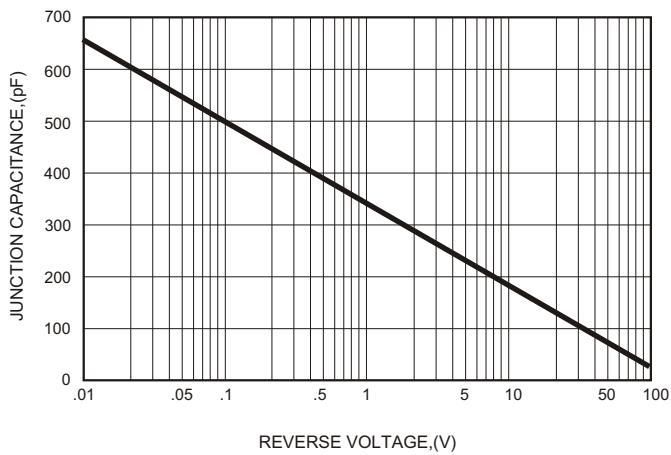


FIG.5 - TYPICAL REVERSE CHARACTERISTICS

