


# Surface Mount Directional Coupler

## TCD-18-122-75X+

75Ω 18 dB 5 to 1250 MHz



CASE STYLE: DB1627

**+RoHS Compliant**

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Reel Size	Available Tape and Reel at no extra cost Devices/Reel
7"	20, 50, 100, 200, 500
13"	1000, 2000

### Maximum Ratings

Operating Temperature	-40°C to 85°C*
Storage Temperature	-55°C to 100°C

\* Case temperature is defined as temperature on ground leads. Permanent damage may occur if any of these limits are exceeded.

### Pin Connections

INPUT	3
OUTPUT	4
COUPLED	1
GROUND	2
75Ω TERM EXTERNAL*	6
NOT USED	5

### Features

- wideband, 5 to 1250 MHz
- low mainline loss, 1.0 dB typ.
- aqueous washable
- leads for excellent solderability
- protected by US Patent 6,140,887

### Applications

- DOCSIS® 3.1 Systems
- VHF/UHF
- CATV
- cellular

### Electrical Specifications at 25°C


Parameter	Condition (MHz)	Min.	Typ.	Max.	Unit
<b>Frequency Range</b>		5		1250	MHz
<b>Mainline Loss<sup>1</sup></b> (above theoretical 0.1 dB)	5 - 50	—	1.2	1.5	dB
	50 - 1000	—	1.0	1.4	
	1000 - 1250	—	1.1	1.5	
<b>Nominal Coupling</b>	5 - 1250	—	17.5±0.8	—	dB
<b>Coupling Flatness(±)</b>	5 - 1250	—	0.7	1.1	dB
<b>Directivity</b>	5 - 50	15	18	—	dB
	50 - 1000	15	22	—	
	1000 - 1250	14	18	—	
<b>Return Loss (Input)</b>	5 - 50	14	17	—	dB
	50 - 1000	18	22	—	
	1000 - 1250	17	24	—	
<b>Return Loss (Output)</b>	5 - 50	15	18	—	dB
	50 - 1000	18	23	—	
	1000 - 1250	17	18	—	
<b>Return Loss (Coupling)</b>	5 - 50	15	17	—	dB
	50 - 1000	18	23	—	
	1000 - 1250	17	25	—	
<b>Input Power</b>	5 - 100	—	—	0.5	W
	100 - 1250	—	—	1.0	

1. Mainline loss includes theoretical power loss at coupled port.


### Typical Performance Data

Frequency (MHz)	Mainline Loss (dB) In-Out	Coupling (dB) In-Cpl	Directivity (dB)	Return Loss (dB)		
				In	Out	Cpl
5	1.17	18.56	18.08	16.32	17.22	17.73
50	0.89	18.04	30.89	20.97	23.02	21.18
100	0.88	18.02	31.98	21.28	23.07	21.50
200	0.89	18.01	29.01	21.36	22.54	21.91
350	0.89	17.95	25.48	21.18	21.63	22.86
500	0.89	17.82	23.18	21.42	21.46	24.47
650	0.89	17.65	21.47	22.01	22.80	26.65
800	0.91	17.48	20.00	23.30	28.26	29.39
1000	0.96	17.20	18.50	26.44	29.66	31.72
1250	1.06	16.81	16.74	29.71	19.14	30.64

### Outline Drawing

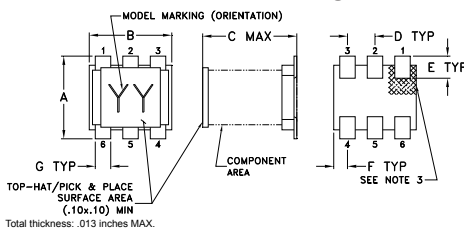

### PCB Land Pattern






Suggested Layout, Tolerance to be within .002

### Outline Dimensions (inch/mm)

A	B	C	D	E	F
.160	.150	.160	.050	.040	.025
4.06	3.81	4.06	1.27	1.02	0.64
G	H	J	K	wt	
.028	.065	.190	.030	grams	
0.71	1.65	4.83	0.76	0.15	



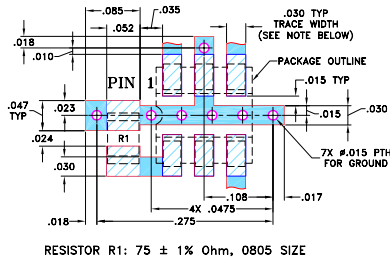
### Demo Board MCL P/N: TB-72 Suggested PCB Layout (PL-010)



- NOTES:
1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS 0.030" ± 0.002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
  2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
-  DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
  -  DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

### Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at [www.minicircuits.com/WCLStore/terms.jsp](http://www.minicircuits.com/WCLStore/terms.jsp)

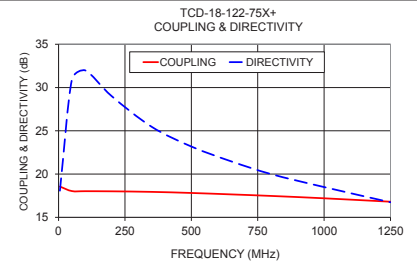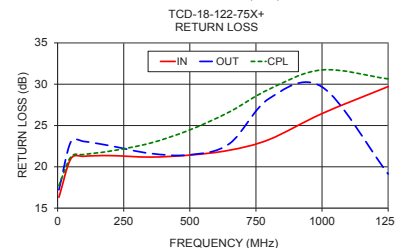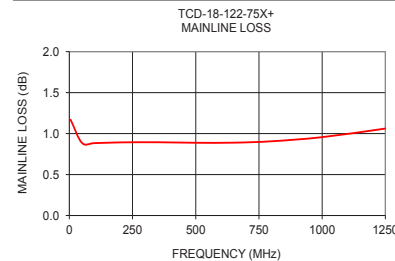

### Electrical Schematic

