




LL3-TG05

LL3

FIBER-OPTIC SENSORS AND FIBERS

SICK
Sensor Intelligence.



Ordering information

Type	Part no.
LL3-TG05	5325921

Other models and accessories → www.sick.com/LL3

Detailed technical data

Features

Device type	Fibers
Detection principle	Through-beam system
For fiber-optic sensor	GLL170(T), WLL180T
Fiber length	2 m
Fiber material	Polymethylmethacrylat (PMMA)
Jacket material	Polyethylen (PE)
Fiber head material	Stainless steel
Outer diameter, fiber-optic cable connection	1 mm
Fiber-optic cable cuttable	✓ ¹⁾
Smooth sleeve diameter (greatest diameter)	≥ 2 mm
Fiber-optic head design	Smooth sleeve, Long end sleeve, 90° deflection
Fiber arrangement	Multi-fiber
Core structure	151 x Ø 0,075 mm Multi-fiber
Bend radius, fibre-optic cable	1 mm
Compatibility with infrared light (1,450 nm)	No
Ambient operating temperature	-40 °C ... +60 °C
Application	High flexible (static)
Diameter/thread size from 2 mm taper	≥ 1 mm
Length of taper	≥ 15 mm
Diameter of taper	≥ 1 mm
Highly flexible/elastic fibers (bend radius 1–4 mm)	Yes
Adapter end sleeves required	Yes
Minimal object diameter	0.02 mm ²⁾
Included with delivery	Adapter sleeves, BF-WLL160-10 (1.0 mm) adapter sleeves, FC fiber cutter (5304141)
Compatibility tip adapters	No

¹⁾ FC fiber optic cable cutter included in delivery.

²⁾ Minimum detectable object was determined at optimum measuring distance and optimum setting.

Classifications

ECl@ss 5.0	27270905
ECl@ss 5.1.4	27270905
ECl@ss 6.0	27270905

ECI@ss 6.2	27270905
ECI@ss 7.0	27270905
ECI@ss 8.0	27270905
ECI@ss 8.1	27270905
ECI@ss 9.0	27270905
ETIM 5.0	EC002651
ETIM 6.0	EC002651
UNSPSC 16.0901	39121528

Sensing ranges with WLL180T

Operating mode 16 µs	13 mm
Operating mode 70 µs	50 mm
Operating mode 250 µs	85 mm
Operating mode 2 ms	170 mm
Operating mode 8 ms	180 mm

Sensing ranges with GLL170


Operating mode 250 µs	40 mm
------------------------------	-------

Sensing ranges with GLL170T

Operating mode 50 µs	30 mm
Operating mode 250 µs	60 mm

Dimensional drawing (Dimensions in mm (inch))

LL3-TG05

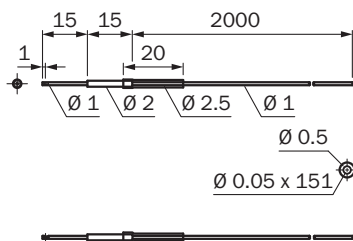

SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is “Sensor Intelligence.”

WORLDWIDE PRESENCE:

Contacts and other locations –www.sick.com