
CML INNOVATIVE TECHNOLOGIES
WHERE INNOVATION COMES TO LIGHT

6310 Series 2 x 5 Rectangular Right Angle LED Assembly

DESCRIPTION AND FEATURES

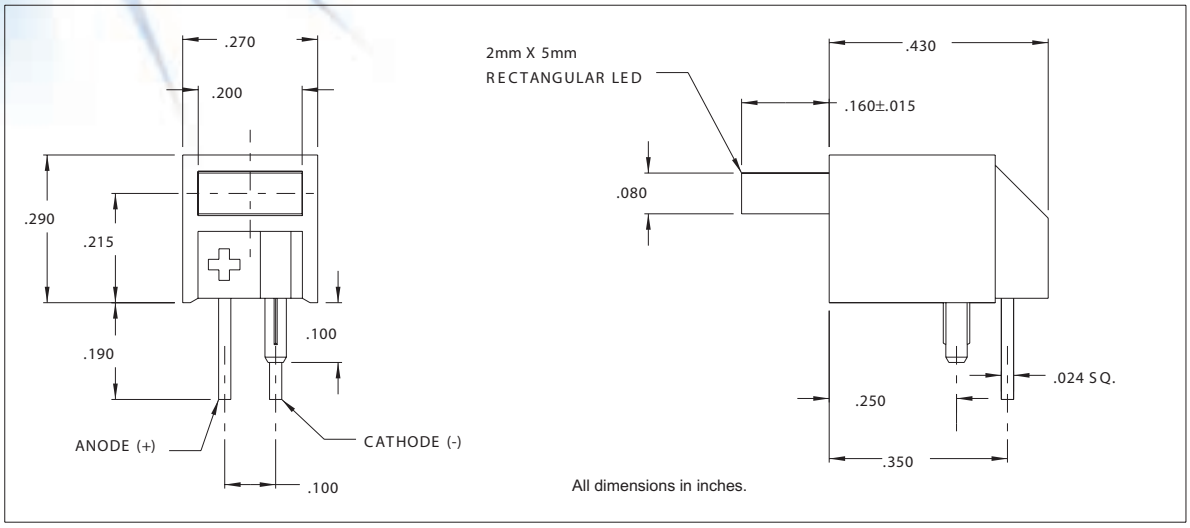

Features

- Block mounting design assures height and side-by-side spacing-alignment saves assembly costs.
- Flat rectangular LED face has even light distribution.
- Press-in mounting pin secures assembly to PC board while being soldered.
- Standoffs prevent flux entrapment.

Housing: Black Nylon, UL94V-O

Mounting hole pattern on page 1-X7.

ELECTRO-OPTICAL CHARACTERISTICS AND RATINGS

Part Number	Emitted Color	Typical Intensity (mcd)	Rated Current (mA)	Continuous Forward Current Max. (mA)	Forward Voltage		Reverse Breakdown Voltage Min. (V)	Peak Wavelength (nm)
					Typ. (V)	Max. (V)		
6310D1	Red	4	20	35	2.0	3.0	5	635
6310D5	Green	4	20	30	2.2	3.0	5	565
6310D7	Yellow	4	20	25	2.1	3.0	5	585

CML INNOVATIVE TECHNOLOGIES
WHERE INNOVATION COMES TO LIGHT

America:
CML Innovative Technologies,Inc.
147 Central Avenue
Hackensack -NJ 07601 -USA
Tel:1-201-489 -8989
Fax:1-201-489 -6911
e-mail:americas@cml-it.com

Europe:
CML Technologies GmbH &Co.KG
Robert-Bunsen-Str.1
67098 Bad Dürkheim -GERMANY
Tel:+49 (0)6322 9567-0
Fax:+49 (0)6322 9567-88
e-mail:europe@cml-it.com

Asia:
CML Innovative Technologies,Inc.
61 Aida Street
Singapore 459975
Tel:(65)9630 -5003
e-mail:asia@cml-it.com

CML-IT reserves the right to make specification revisions that enhance the design and/or performance of the product