

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION – ,– .
© COPYRIGHT – BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST
DW	—


REVISIONS


P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	REVISED (ECR-10-023125)	10NOV10	JL	WK

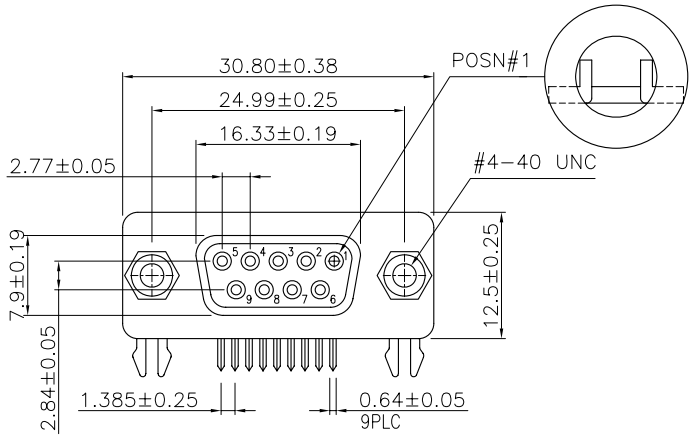


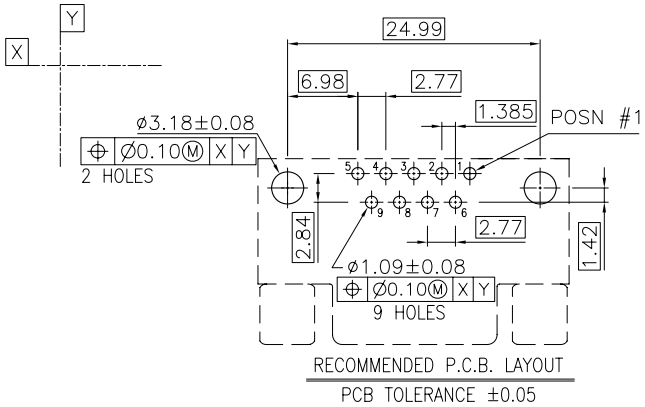


RECOMMENDED P.C.B. LAYOUT
PCB TOLERANCE ±0.05

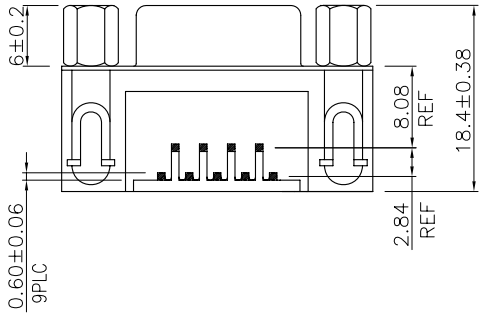







DATE CODE

NOTES:

1. MATERIAL:
   - 1.1 HOUSING: NY9T WITH 30% G.F. UL 94V-0, COLOR: BLACK
   - 1.2 CONTACTS: PHOSPHOR BRONZE
   - 1.3 SHELL: SPCC
   - 1.4 BOARDLOCKS: BRASS
   - 1.5 RIVET: BRASS
   - 1.6 SCREWLOCKS: BRASS, THREAD LENGTH OF SCREW: 6.0 MIN.
2. FINISH:
   - 2.1 CONTACT: GOLD PLATING ON CONTACT AREA. (SEE TABLE) 2.54um[100u"] MIN. MATTE-TIN PLATING ON SOLDER TAIL, 1.27um[50u"] MIN. NICKEL UNDERPLATED ON ENTIRE CONTACT.
   - 2.2 BOARDLOCK: 2.54um[100u"] MIN. MATTE-TIN PLATING OVER 1.27um[50u"] MIN. NICKEL UNDERPLATED ON ENTIRE CONTACT.
   - 2.3 SHELL: NICKEL PLATED
   - 2.4 RIVET: NICKEL PLATED
   - 2.5 SCREWLOCKS: NICKEL PLATED
3. NET WEIGHT: 8.9 gram/PC.
4. THREADED INSERTS AND SCREWLOCKS MUST WITHSTAND 6 IN-LBS TORQUE.
5. DAET CODE: YYWW
6. REFLOW SOLDER CAPABLE TO 260°C PER TE SPEC. 109-201, CONDITION B.

0.38um[15u"]	1734354-2
GOLD-FLASH	1734354-1
CONTACT FINISH MIN.	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: MM

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	± –
1 PLC	± 0.38
2 PLC	± 0.25
3 PLC	± 0.15
4 PLC	± –
ANGLES	± –

MATERIAL: SEE NOTE
FINISH: SEE NOTE

DWN J. LEE	17NOV2006
CHK S. HOU	17NOV2006
APVD W.J. KE	17NOV2006
PRODUCT SPEC	108-57541
QUALIFICATION TEST REPORT	501-57623
WEIGHT	SEE NOTE

Tyco Electronics
Tyco Electronics Corporation
Taipei, Taiwan

NAME: RECEPTACLE ASSEMBLY, 9 POSN, RIGHT ANGLE, 8.08mm[0.318in] SERIES, AMPLIMITE, WITH SCREWLOCKS

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-1734354	—


CUSTOMER DRAWING | SCALE — | SHEET 1 OF 2 | REV A


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION –,– .
© COPYRIGHT – BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST
DW	—

REVISIONS


P	LTR	DESCRIPTION	DATE	DWN	APVD
		SEE SHEET 1.			

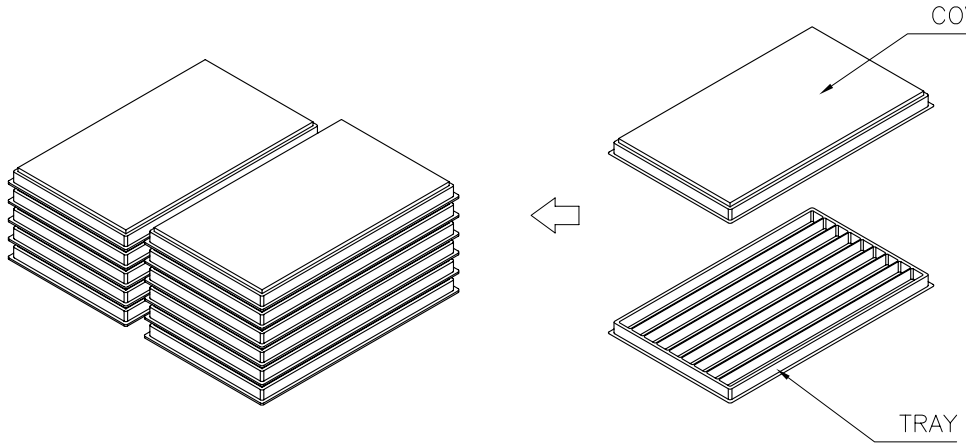

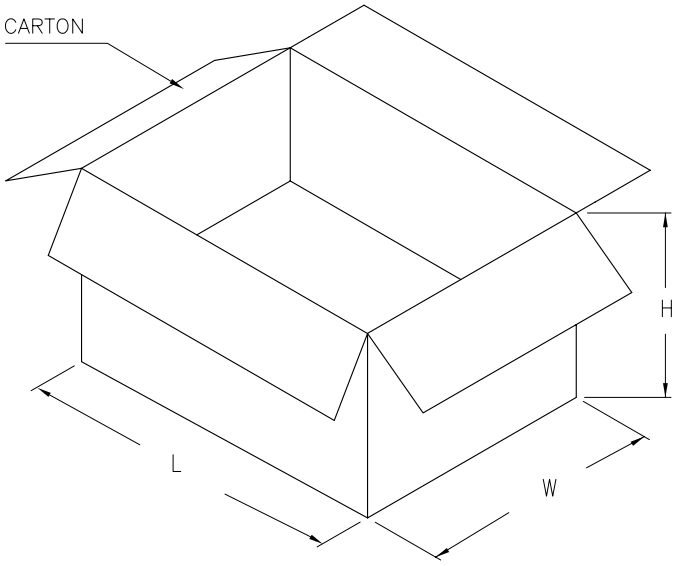

NOTES:

1. MATERIAL:
   1.1 TRAY: PVC
   1.2 SHIPPING CARTON: CORRUGATED FIBERBOARD
2. DIMENSION:
   2.1 TRAY: L=306, W=217, H=15.8
   2.2 SHIPPING CARTON: L=440, W=321, H=153
3. QUANTITY:
   3.1 PRIMARY PACKING: 90 PCS/TRAY
   3.2 SECONARY PACKING: 11 TRAY/CARTON(990PCS)
4. CARTON WEIGHT:
   4.1 NET WEIGHT: 8.9 KG
   4.2 GROSS WEIGHT: 9.9 KG

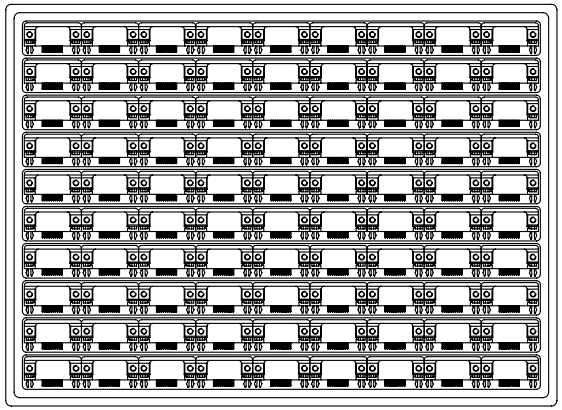

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: MM

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± –
3 PLC ± –
4 PLC ± –
ANGLES ± –

MATERIAL –

FINISH –

DWN	J. LEE	17NOV2006
CHK	S. HOU	17NOV2006
APVD	W.J. KE	17NOV2006
PRODUCT SPEC	—	
APPLICATION SPEC	—	
WEIGHT	–	

Tyco Electronics
Tyco Electronics Corporation
Taipei, Taiwan

NAME
RECEPTACLE ASSEMBLY, 9 POSN,
RIGHT ANGLE, 8.08mm[0.318in]
SERIES, AMPLIMITE, WITH SCREWLOCKS

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-1734354	—

CUSTOMER DRAWING

SCALE	SHEET	REV
—	2 OF 2	A