

P-tec Corp. Tel:(800)688-0613
 2405 Commerce Circle Tel:(719) 589 3122
 Alamosa Co. 81101 Fax:(719) 589 3592
 www.p-tec.net sales@p-tec.net



PL008 Series Ultra Bright Hyper Red SMD LED PLCC-2 Package

Features

- *PLCC-2 Package 3.2 x 2.7 x 1.9 mm
- *High Luminous Output
- *Very Wide Viewing Angle
- *For use as Optical Indicator, Backlighting
- *For Optical Coupling into Light Pipes/Lenses
- *12mm Tape, 2000pc Reels
- *RoHS Compliant


Absolute Maximum Ratings at T_A = 25°C

Power Dissipation.....	75mW
Reverse Voltage (<100µA).....	5.0V
Max Forward Current.....	30mA
Peak Forward Current (1/10 Duty Cycle, 0.1ms Pulse Width).....	100mA
Operating Temperature Range.....	-25°C to + 85°C
Storage Temperature Range.....	-40°C to + 100°C
Reflow Soldering Temperature.....	260°C for 5 seconds
Electric Static Discharge Threshold (HBM).....	300V

Electrical & Optical Characteristics at T_A = 25°C

Part Number	Emitting Color	Chip Material	Peak Wave Length	Dominant Wave Length	Viewing Angle 2θ ½	Forward Voltage @20mA (V)		Luminous Intensity @20mA (mcd)	
						Typ	Max	Min	Max
PL008-WCR38	Orange-Red	AlGaInP	632	625	120°	2.1	2.5	300	600

Package Dimensions are in **Millimeters**. Tolerance is ± 0.25mm unless otherwise specified.

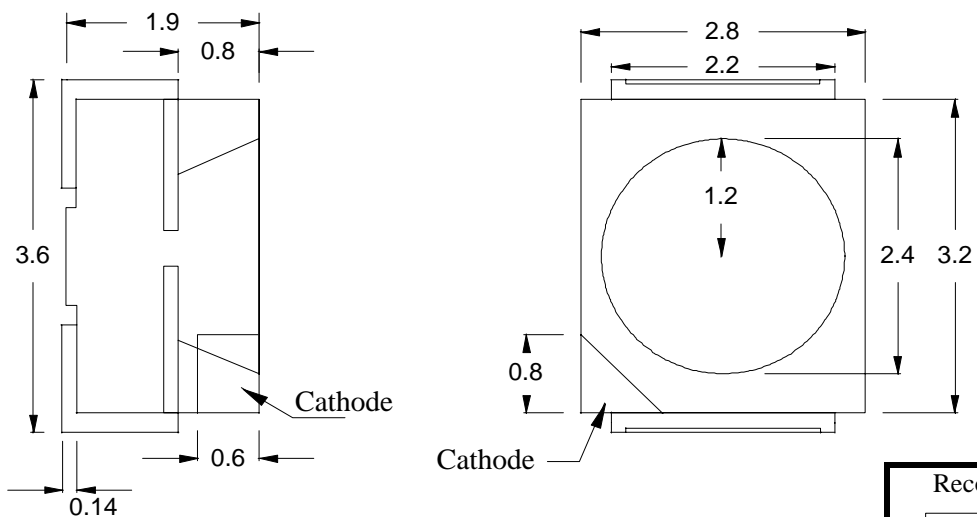

Recommended solder pad

