Shock-safe Fuseholder, Solder Terminals, 5x20 mm





250 VAC · 2.5 W / 6.3 A

Description
- Fuseholder is designed and manufactured by Schurter Electronics Pvt. Ltd. in India
- Black and red caps available

Applications
- Low cost consumer electronics

References
General Product Information

Weblinks
Approvals, RoHS, CHINA-RoHS, e-Store, Distributor-Stock-Check, Accessories, Product Change Notification (PCN)


Technical Data


Shocksafe Category	PC2
Fuse-Link	5 x 20 mm
Mounting	Panel Mount
Mounting	Fixing Nut
Terminal	Solder
Rated Voltage	250 VAC
Rated Current	6.3 A
Rated Power Acceptance IEC	2.5 W / 6.3 A @ Ta 23 °C
Admissible Ambient Air Temp.	-40 °C to 85 °C
Material: Socket	Thermoplastic, UL 94V-2
Storage Conditions	0 °C to 60 °C, max. 70% r.h.

Soldering Methods	Iron
Solderability	350 °C / 2 sec
Resistance to Soldering Heat	350 °C / 2 sec

Abmessungen

40 mm

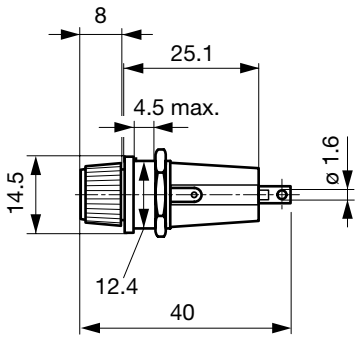



Variants

Holder	Colour Cap	Order Number
●	black	8601.2010
●	red	8601.2020

Packaging Unit Bulk (100 pcs.)

The specifications, descriptions and illustrations indicated in this document are based on current information. All content is subject to modifications and amendments.