




P	LTR	DESCRIPTION	DATE	DWN	APVD
	1	INITIAL ISSUE	19AUG2020	SM	MZ
	2	DRAFTING UPDATES	03SEP2020	SM	MZ
	A	PRODUCT UNDER TESTING	24NOV2020	SM	MZ

NOTES:

1. PART NUMBERS: 1-2359422-1 AND 1-2359422-2 ARE CRIMPED CONTACT VERSIONS. CONTACTS SUPPLIED SEPARATELY ON REELS, MUST PURCHASED ACCORDING TO WIRE SIZES. BELOW ARE THE CONTACT PART NUMBERS:

CONTACT P/N	WIRE SIZE
2359527-1	1.5mm ² TO 2.5mm ² 16AWG TO 14AWG
2359527-2	2.5mm ² TO 4.0mm ² 14AWG TO 12AWG

2. MATERIALS:
PLASTICS: PBT+PC ALLOY, UL-V0, UV-F1
CONTACTS: COPPER ALLOY, TIN PLATED
SCREWS : STAINLESS STEEL
3. OPERATING RATINGS :
VOLTAGE (max): 600Vac Max
CURRENT (max): 25A ON 4.0mm² & 20A ON 12AWG
TEMPERATURE : -40°C TO 85°C
IP RATING : IP67 & IP68
4. FOR ASSEMBLY INSTRUCTIONS, REFER APPLICATION SPECIFICATION 114-133123
5. PACKAGING: MOQ 200 pcs IN PE BAG

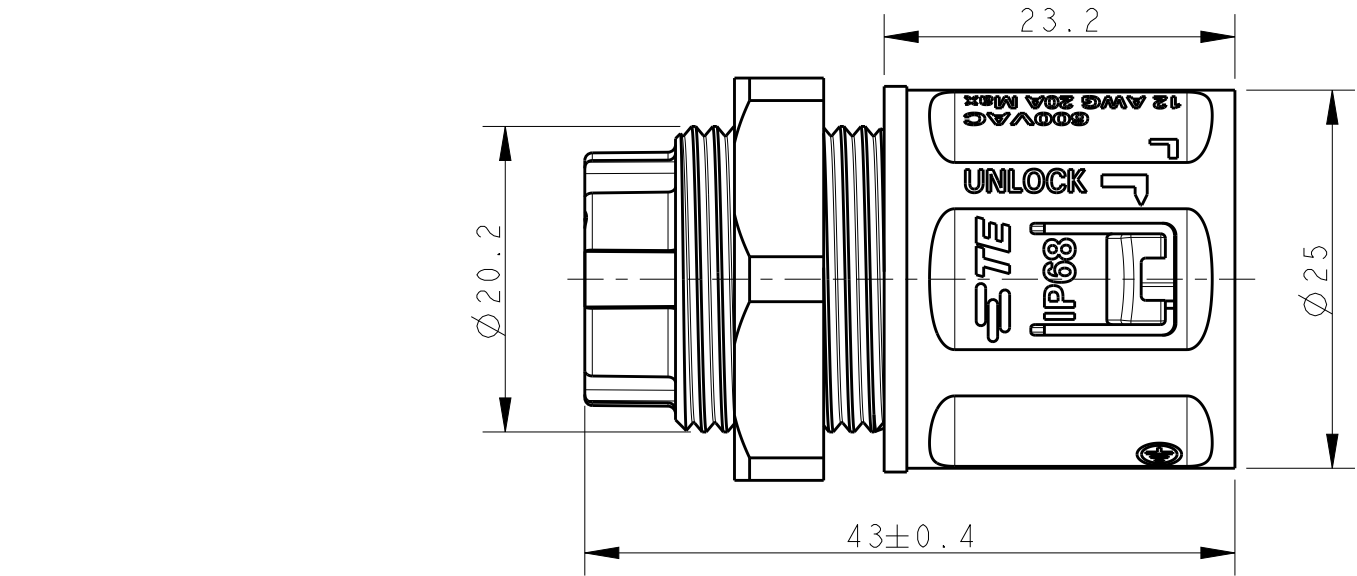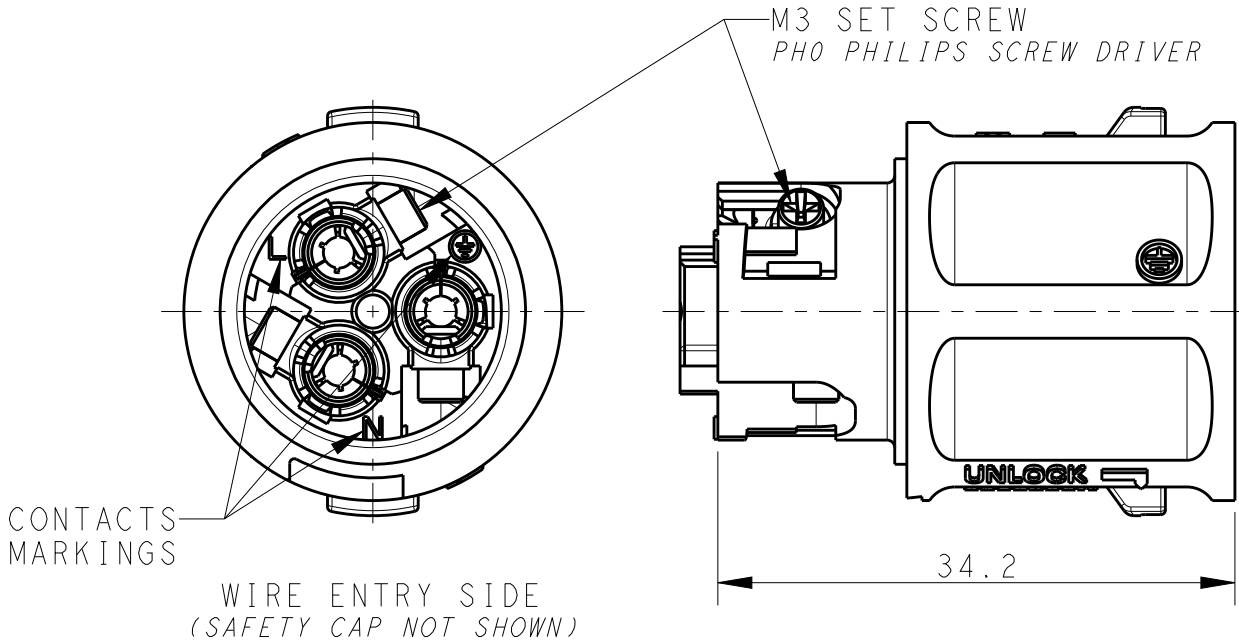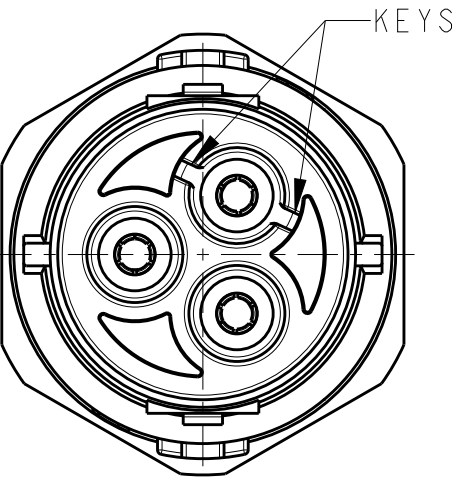


PANEL CUT-OUT
RECOMMENDED SIZE

PRODUCT UNDER TESTING


CONTACT PRODUCT ENGINEERING
BEFORE USING THIS PRINT

1.5-6.0
THICKNESS


Ø20.4 Min
M20 CLEARANCE HOLE

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN SUBHASH.M 19AUG2020	<div>TE Connectivity</div>			
DIMENSIONS: mm		CHK M. ZUCCA 03SEP2020				
		APVD PETER OTT 24NOV2020				
		PRODUCT SPEC 108-133123				
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPLICATION SPEC 114-133123	NAME NECTOR T, 3Pos, SOCKET CONNECTOR PANEL MOUNT			
0 PLC ±0.2 1 PLC ±0.2 2 PLC ±0.1 3 PLC ±- 4 PLC ±- ANGLES ±1°		WEIGHT -				
MATERIAL - -		FINISH - -	SIZE A3	CAGE CODE 00779	DRAWING NO C-2359422	RESTRICTED TO -
CUSTOMER DRAWING			SCALE 2:1	SHEET 1 OF 2	REV A	

CRIMP TERMINATION TYPE
1-2359422-1 & 1-2359422-2
REFER 114-133123 FOR DETAILED INSTRUCTION


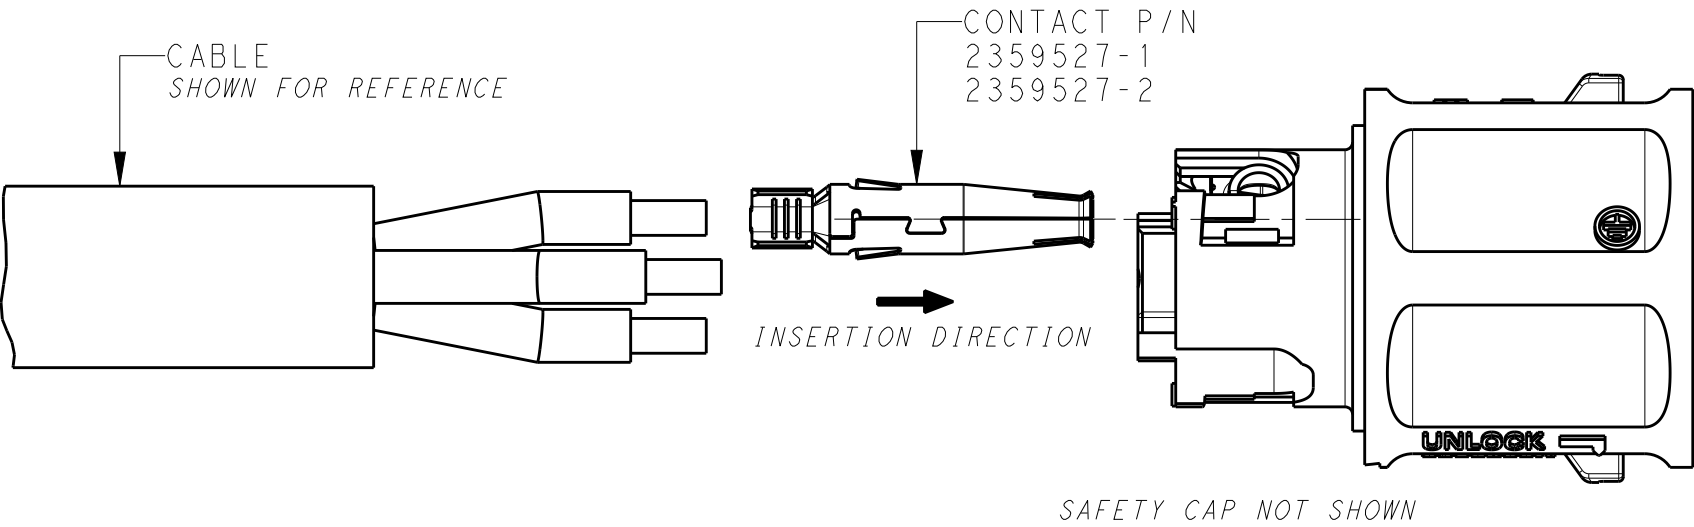



EXPLODED COMPONENTS

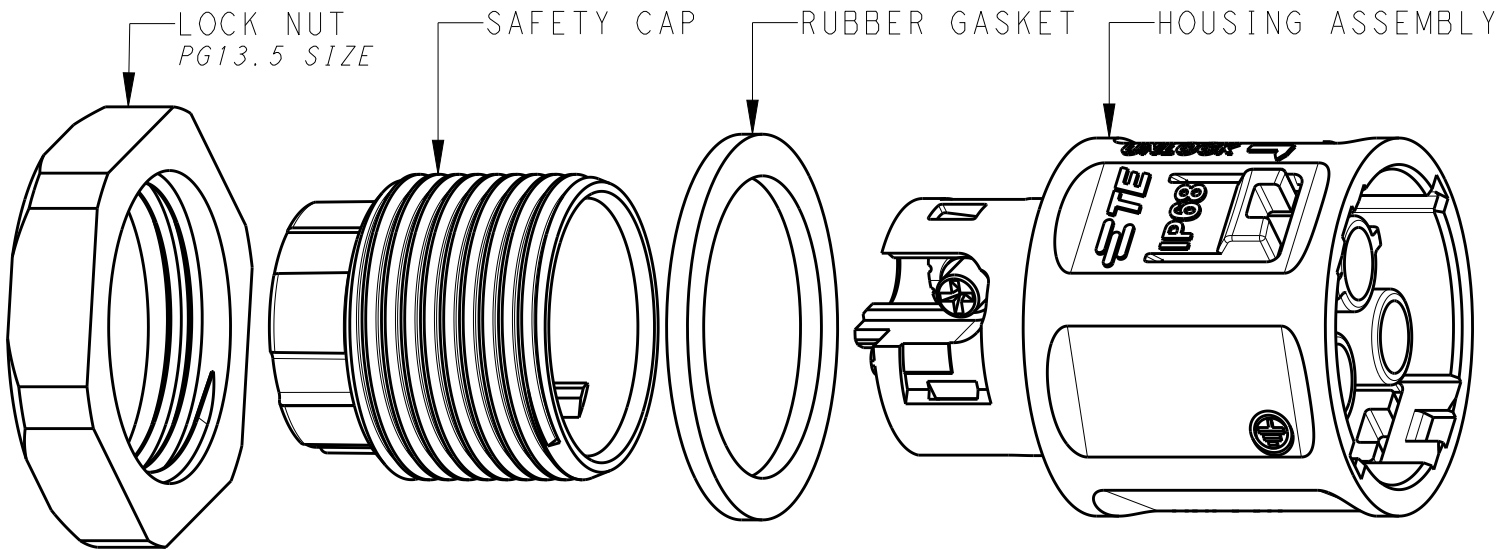

POLARIZING KEY A
2359422-1
1-2359422-1

POLARIZING KEY B
2359422-2
1-2359422-2

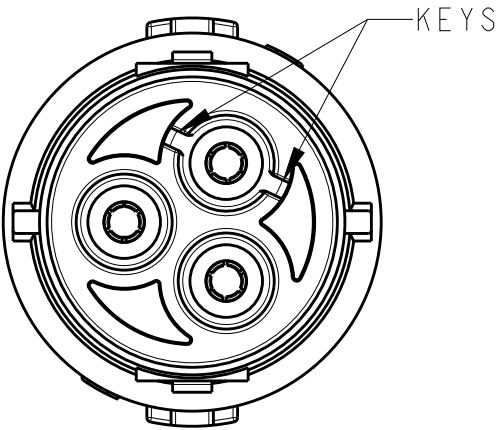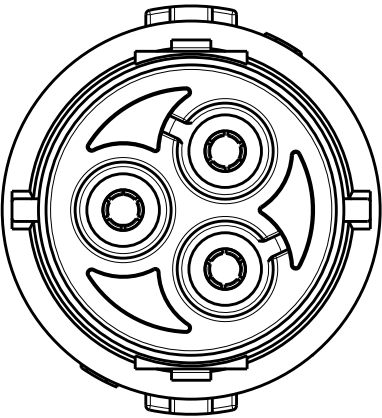

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN SUBHASH.M 19AUG2020		 TE Connectivity	
DIMENSIONS: mm		CHK M. ZUCCA 03SEP2020			
		APVD PETER OTT 24NOV2020		NAME NECTOR T, 3Pos, SOCKET CONNECTOR PANEL MOUNT	
		PRODUCT SPEC 108-133123			
		APPLICATION SPEC 114-133123			
		WEIGHT -			
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±0.2 1 PLC ±0.2 2 PLC ±0.1 3 PLC ± 4 PLC ± ANGLES ±1°		CUSTOMER DRAWING		RESTRICTED TO -	
MATERIAL - -		FINISH - -		SCALE 2:1	
				SHEET 2 OF 2	
				REV A	