



**Inolux Technologies 0.30" Dual Digit Numeric Display
HNTD30 Series**

Official Product	HNTD30 Series	Customer Part No.		Data Sheet No.
	*****	*****		HNTD30 Series
Specifications are subject to change without notice. Data and drawings herein are copyrighted.		May 02, 2013	Version of 1.0	Page 1/17

DISCLAIMER	3
ORDERABLE INFORMATION	4
FEATURES	5
SCHEMATIC DRAWING	6
PRODUCT CHARACTERISTIC	7
ABSOLUTE MAXIMUM RATING	7
ELECTRICAL AND OPTICAL CHARACTERISTIC	8
CHARACTERISTIC CURVES FOR UB	9
CHARACTERISTIC CURVES FOR UTG	10
CHARACTERISTIC CURVES FOR UYG	11
CHARACTERISTIC CURVES FOR UY	12
CHARACTERISTIC CURVES FOR UA	13
CHARACTERISTIC CURVES FOR UR	14
CHARACTERISTIC CURVES FOR USR	15
REFLOW SOLDERING	16
SOLDERING IRON	16
REWORK	16
REVISION HISTORY	17

Official Product	HNTD30 Series	Customer Part No.		Data Sheet No.
	*****	*****		HNTD30 Series
Specifications are subject to change without notice. Data and drawings herein are copyrighted.		May 02, 2013	Version of 1.0	Page 2/17

DISCLAIMER

- The information contained herein is presented only as a guide for the applications of our products.

No responsibility is assumed by INOLUX for any infringements of intellectual property or other rights of the third parties which may result from its use.

- Inolux is continually effort to improve the quality of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing INOLUX products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such INOLUX products cause loss of human life, bodily injury or damage to property.
- The INOLUX products listed in this document are intended for usage in general electronics (computer, personal equipment, office equipment, industrial robotics, domestic, etc...) These products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury.
- In developing your designs, please ensure that INOLUX products are used within specified operating ranges as set forth in the most recent INOLUX products specifications.
- Also, please keep in mind the precautions listed in this document.

Official Product	HNTD30 Series	Customer Part No.		Data Sheet No.
	*****	*****		HNTD30 Series
Specifications are subject to change without notice. Data and drawings herein are copyrighted.		May 02, 2013	Version of 1.0	Page 3/17

Orderable Information


H N T D 30 X X X - X X X X

Series Name	Digit Height	Color Code	Polarity	Customer Code
HNTD H: Inolux Technologies N: Numeric T: Through Hole D: Dual digit	30: 0.30" digit height	UB: 470nm InGaN Blue UTG: 525nm InGaN True Green UYG: 570nm AllnGaP Yellow Green UY: 590nm AllnGaP Yellow UA: 606nm AllnGaP Amber UR: 625nm AllnGaP Hyper Red USR: 639nm AllnGaP Super Red	CA: Common Anode CC: Common Cathode	XXXX: Customer specific code

Official Product	HNTD30 Series	Customer Part No.		Data Sheet No.
	*****	*****		HNTD30 Series
Specifications are subject to change without notice. Data and drawings herein are copyrighted.		May 02, 2013	Version of 1.0	Page 4/17

Features


- 0.30" (7.62mm) Digit Height
- Through Hole Display
- Black Face , White Segment
- RoHS Compliant, Pb Free

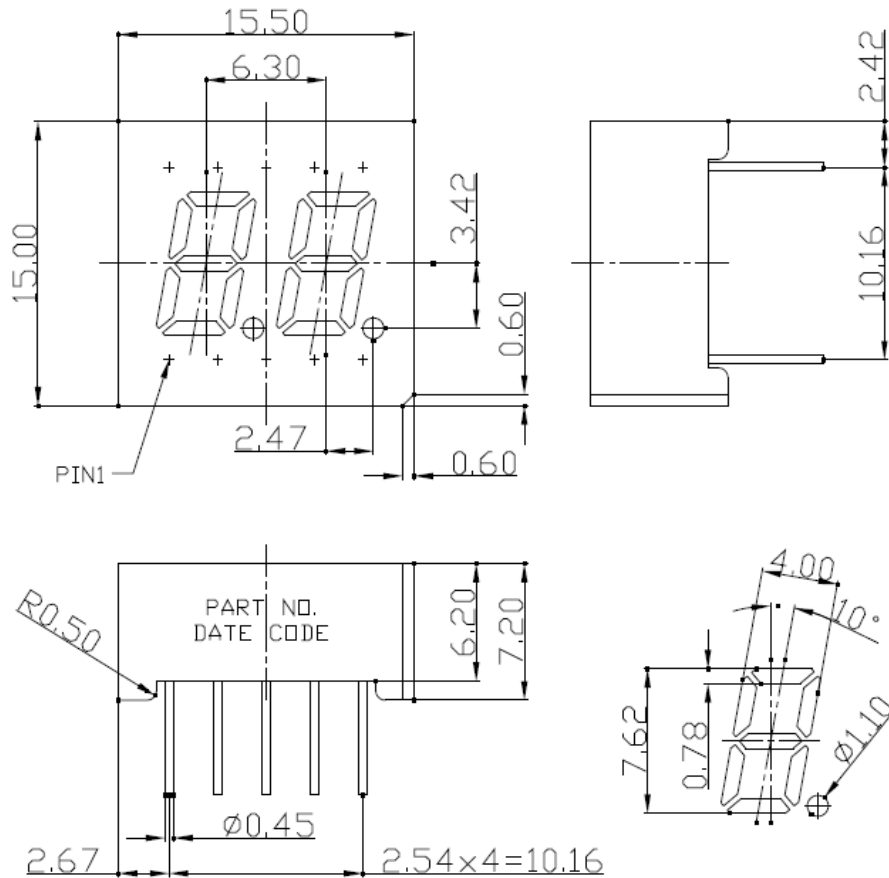

Note: Dimension is in millimeters. Tolerance is $\pm 0.25\text{mm}$ unless otherwise noted.

Official Product	HNTD30 Series	Customer Part No.		Data Sheet No.
	*****	*****		HNTD30 Series
Specifications are subject to change without notice. Data and drawings herein are copyrighted.		May 02, 2013	Version of 1.0	Page 5/17

Schematic Drawing

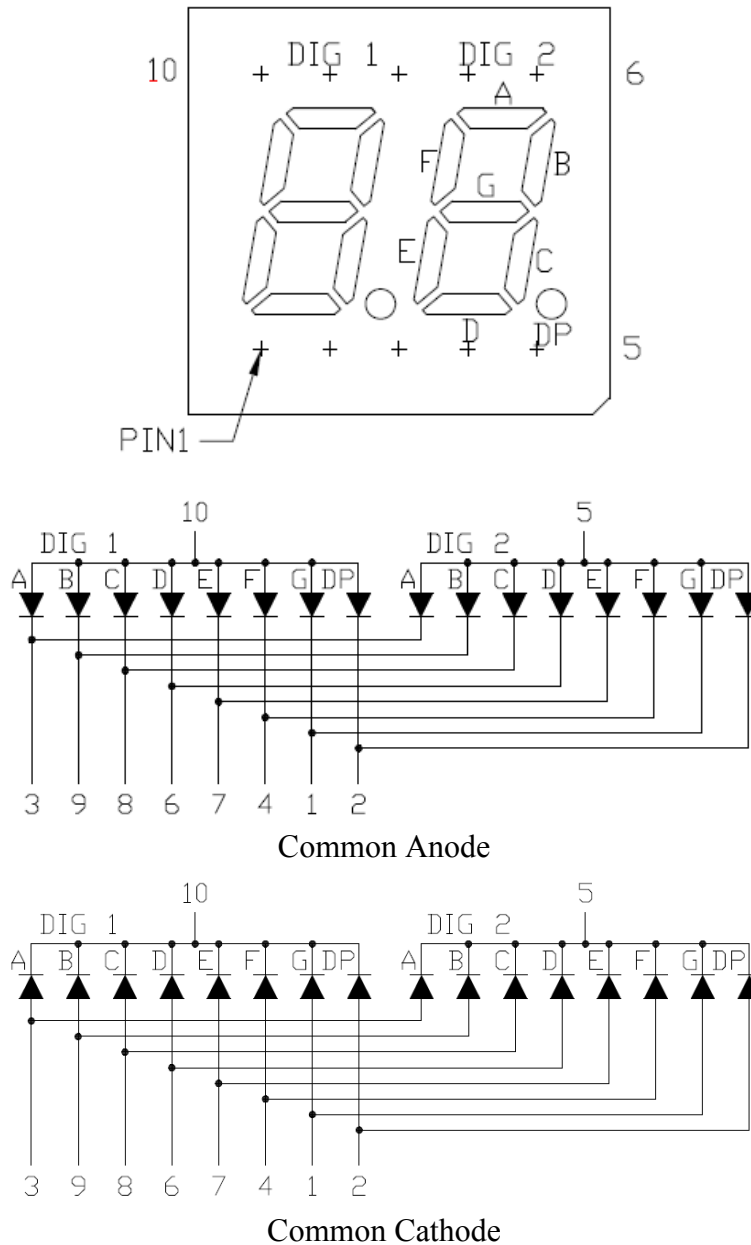

Official Product	HNTD30 Series	Customer Part No.	Data Sheet No.
	*****	*****	HNTD30 Series
Specifications are subject to change without notice. Data and drawings herein are copyrighted.		May 02, 2013	Version of 1.0
			Page 6/17

Product Characteristic

Absolute Maximum Rating

(T_a = 25°C)

Product	Emission Color	P _{AD} (mW)	I _{AF} (mA)	I _{PF} (mA)	V _R (V)	T _{OP} (°C)	T _{ST} (°C)	Derate From 25°C (mA/°C)
HNTD30UBCA/ HNTD30UBCC	Blue	120	30	100	5	-25 ~ +85	-25 ~ +85	0.4
HNTD30UTGA/ HNTD30UTGC	True Green	120	30	100	5	-25 ~ +85	-25 ~ +85	0.3
HNTD30UYGA/ HNTD30UYGC	Yellow Green	85	30	120	5	-25 ~ +85	-25 ~ +85	0.42
HNTD30UYA/ HNTD30UYC	Yellow	70	25	90	5	-25 ~ +85	-25 ~ +85	0.28
HNTD30UAA/ HNTD30UAC	Amber	70	25	90	5	-25 ~ +85	+25 ~ +85	0.33
HNTD30URA/ HNTD30URC	Hyper Red	70	25	90	5	-25 ~ +85	-25 ~ +85	0.33
HNTD30USRA/ HNTD30USRC	Super Red	70	20	90	5	-25 ~ +85	-25 ~ +85	0.33

Official Product	HNTD30 Series	Customer Part No.		Data Sheet No.
	*****	*****		HNTD30 Series
Specifications are subject to change without notice. Data and drawings herein are copyrighted.		May 02, 2013	Version of 1.0	Page 7/17

Electrical and Optical Characteristic

 (T_a = 25°C)

Product	Emission Color	I _F (mA)	V _F (V)		λ (nm)		I _V (mcd)	I _R (μA)
			Typ.	Max.	λ _d	Δλ	Typ.	Max
HNTD30UBCA/ HNTD30UBCC	Blue	20	3.2	4.0	470	30	60	10 (V _R =8V)
HNTD30UTGA/ HNTD30UTGC	True Green	20	3.2	4.0	525	30	140	10 (V _R =8V)
HNTD30UYGA/ HNTD30UYGC	Yellow Green	20	2.1	2.6	571	20	20	10 (V _R =5V)
HNTD30UYA/ HNTD30UYC	Yellow	20	2.0	2.6	590	20	40	10 (V _R =5V)
HNTD30UAA/ HNTD30UAC	Amber	20	2.0	2.6	606	35	40	10 (V _R =5V)
HNTD30URA/ HNTD30URC	Hyper Red	20	2.0	2.6	625	20	40	10 (V _R =5V)
HNTD30USRA/ HNTD30USRC	Super Red	20	2.0	2.6	639	20	30	10 (V _R =5V)

Luminous Intensity tolerance = +/- 15%

Official Product	HNTD30 Series	Customer Part No.		Data Sheet No.
	*****	*****		HNTD30 Series
Specifications are subject to change without notice. Data and drawings herein are copyrighted.		May 02, 2013	Version of 1.0	Page 8/17

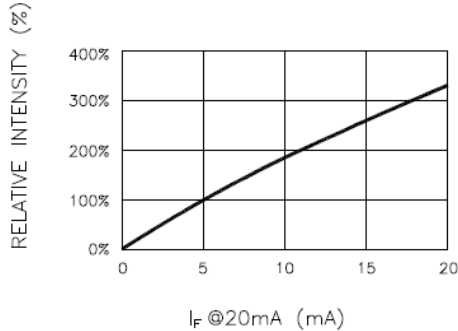
Characteristic Curves for UB


Fig.1 RELATIVE INTENSITY VS. FORWARD CURRENT

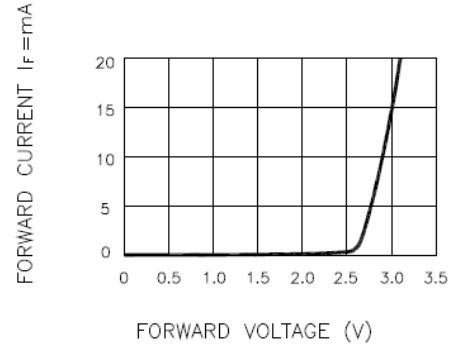


Fig.2 FORWARD CURRENT VS. FORWARD VOLTAGE

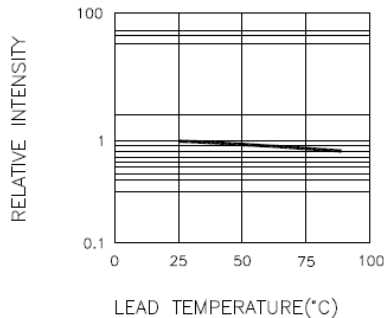
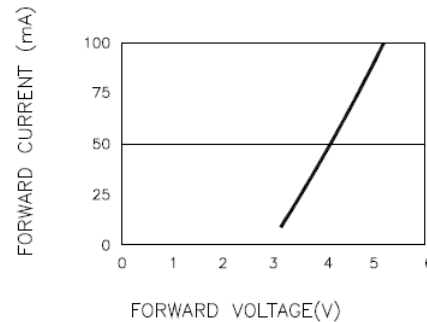
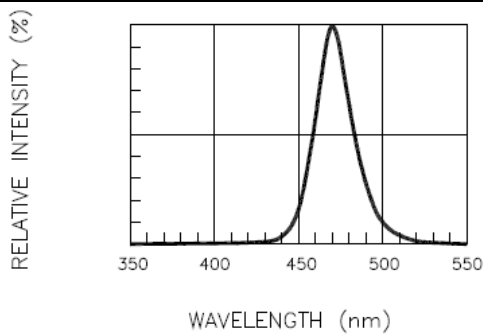
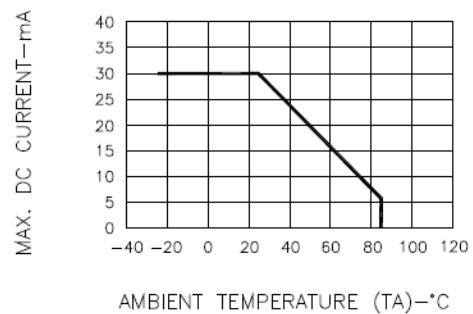
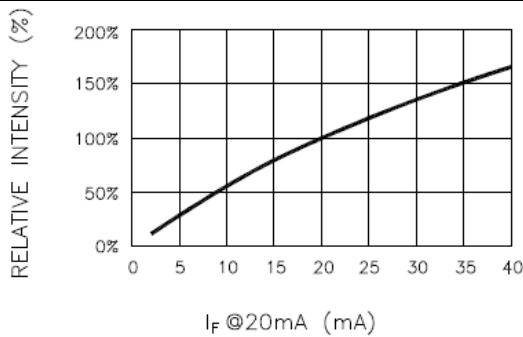
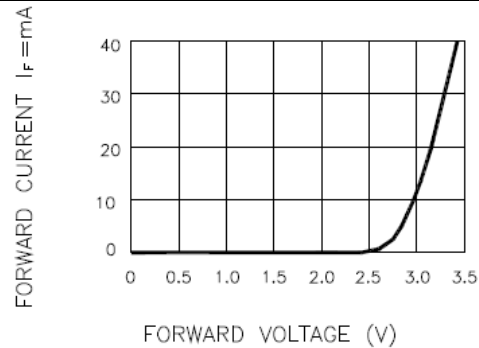
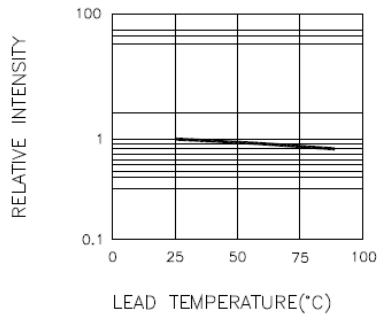
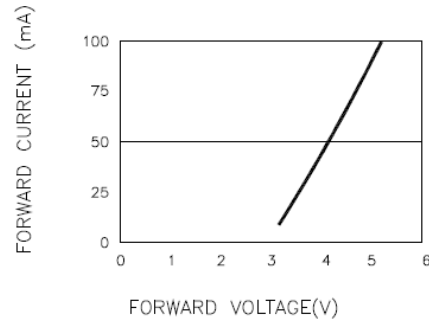
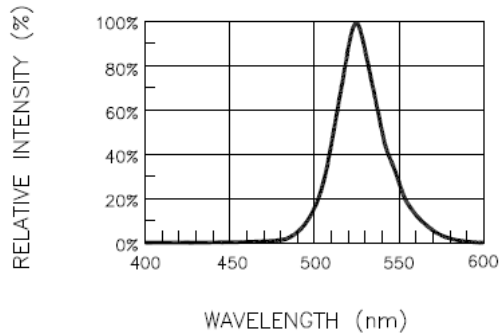
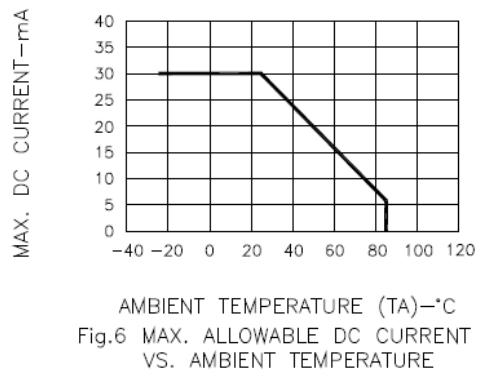

 Fig.3 RELATIVE INTENSITY VS. LEAD TEMPERATURE
(PULSED 20 mA; 300us PULSE, 10ms PERIOD)

 Fig.4 PEAK FORWARD VOLTAGE VS. FORWARD
(100us TEST PULSE, 1% DUTY CYCLE)


Fig.5 RELATIVE INTENSITY VS. WAVELENGTH


 Fig.6 MAX. ALLOWABLE DC CURRENT
VS. AMBIENT TEMPERATURE

Official Product	HNTD30 Series	Customer Part No.	Data Sheet No.
	*****	*****	HNTD30 Series
Specifications are subject to change without notice. Data and drawings herein are copyrighted.	May 02, 2013	Version of 1.0	Page 9/17

Characteristic Curves for UTG

Fig.1 RELATIVE INTENSITY VS. FORWARD CURRENT

Fig.2 FORWARD CURRENT VS. FORWARD VOLTAGE

**Fig.3 RELATIVE INTENSITY VS. LEAD TEMPERATURE
(PULSED 20 mA; 300us PULSE, 10ms PERIOD)**

**Fig.4 PEAK FORWARD VOLTAGE VS. FORWARD CURRENT
(100us TEST PULSE, 1% DUTY CYCLE)**

Fig.5 RELATIVE INTENSITY VS. WAVELENGTH

**Fig.6 MAX. ALLOWABLE DC CURRENT
VS. AMBIENT TEMPERATURE**

Official Product	HNTD30 Series	Customer Part No.	Data Sheet No.
	*****	*****	HNTD30 Series
Specifications are subject to change without notice. Data and drawings herein are copyrighted.	May 02, 2013	Version of 1.0	Page 10/17

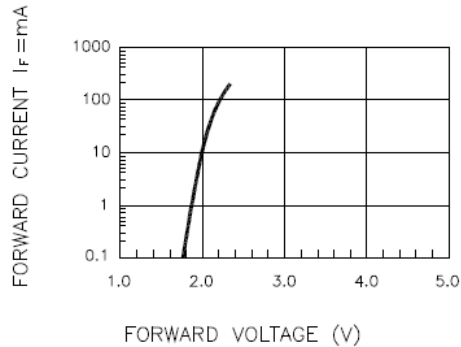
Characteristic Curves for UYG


Fig.1 FORWARD CURRENT VS. FORWARD VOLTAGE

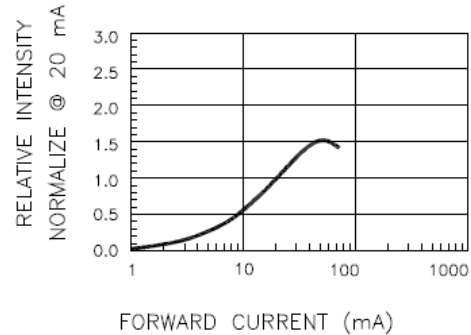


Fig.2 RELATIVE INTENSITY VS. FORWARD CURRENT

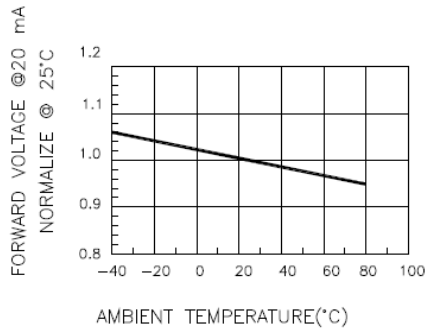


Fig.3 FORWARD VOLTAGE VS. TEMPERATURE

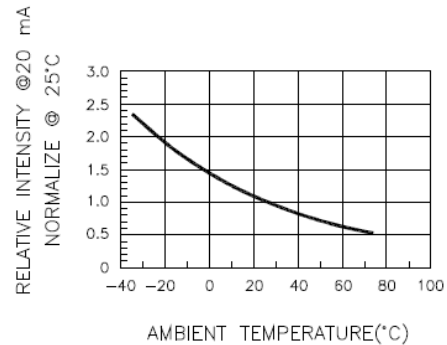


Fig.4 RELATIVE INTENSITY VS. TEMPERATURE

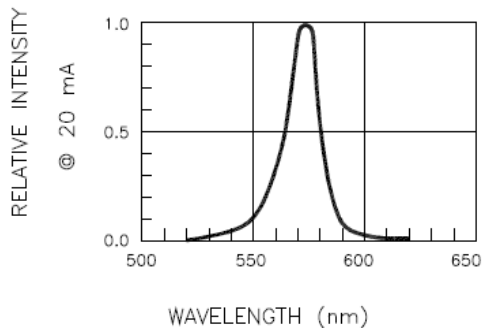


Fig.5 RELATIVE INTENSITY VS. WAVELENGTH

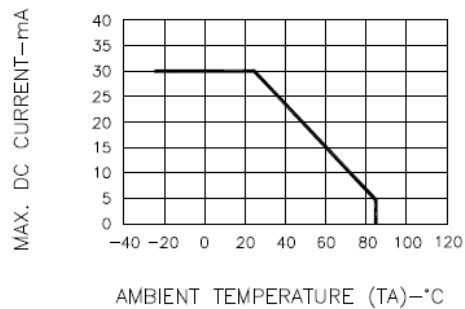


Fig.6 MAX. ALLOWABLE DC CURRENT VS. AMBIENT TEMPERATURE

Official Product	HNTD30 Series	Customer Part No.	Data Sheet No.
	*****	*****	HNTD30 Series
Specifications are subject to change without notice. Data and drawings herein are copyrighted.		May 02, 2013	Version of 1.0
			Page 11/17

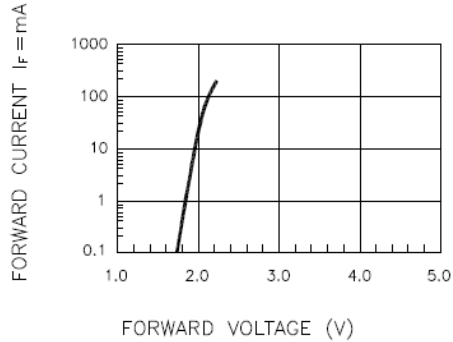
Characteristic Curves for UY


Fig.1 FORWARD CURRENT VS. FORWARD VOLTAGE

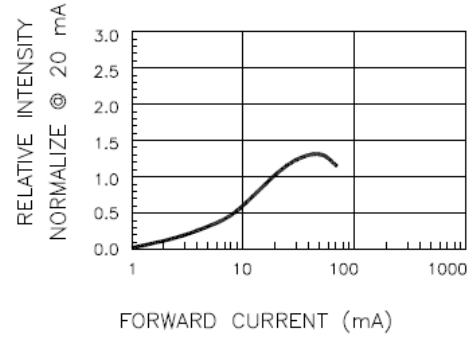


Fig.2 RELATIVE INTENSITY VS. FORWARD CURRENT

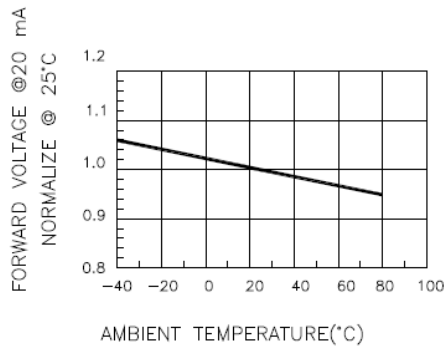


Fig.3 FORWARD VOLTAGE VS. TEMPERATURE

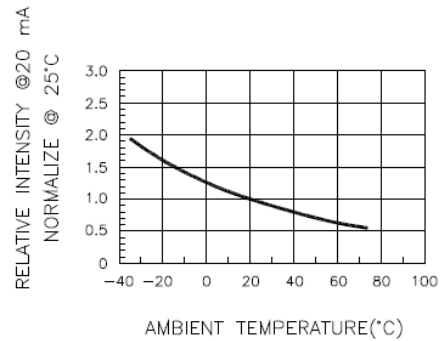


Fig.4 RELATIVE INTENSITY VS. TEMPERATURE

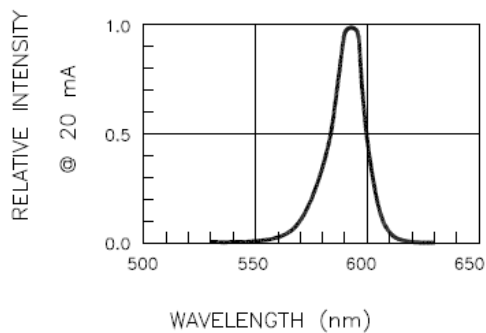


Fig.5 RELATIVE INTENSITY VS. WAVELENGTH

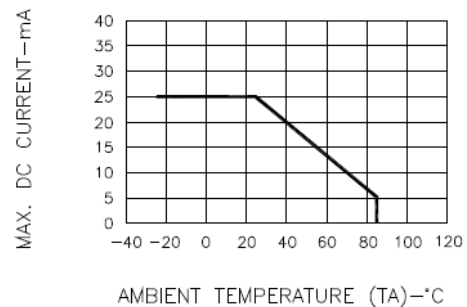


Fig.6 MAX. ALLOWABLE DC CURRENT VS. AMBIENT TEMPERATURE

Official Product	HNTD30 Series	Customer Part No.	Data Sheet No.
	*****	*****	HNTD30 Series
Specifications are subject to change without notice. Data and drawings herein are copyrighted.	May 02, 2013	Version of 1.0	Page 12/17

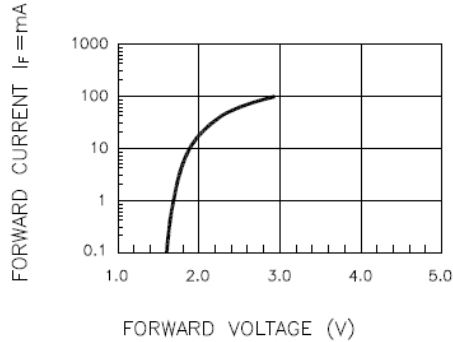
Characteristic Curves for UA


Fig.1 FORWARD CURRENT VS. FORWARD VOLTAGE

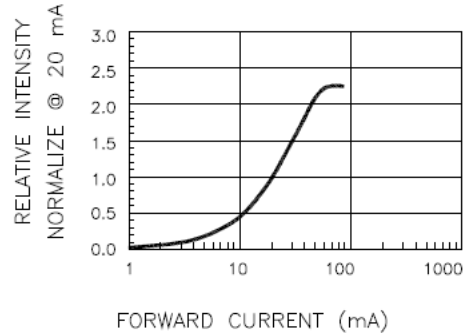


Fig.2 RELATIVE INTENSITY VS. FORWARD CURRENT

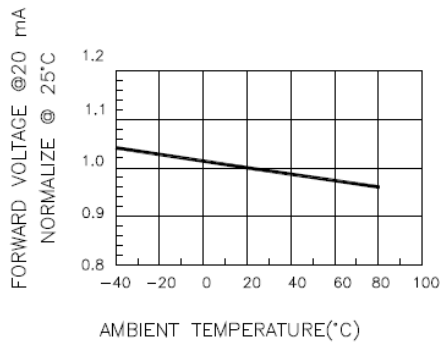


Fig.3 FORWARD VOLTAGE VS. TEMPERATURE

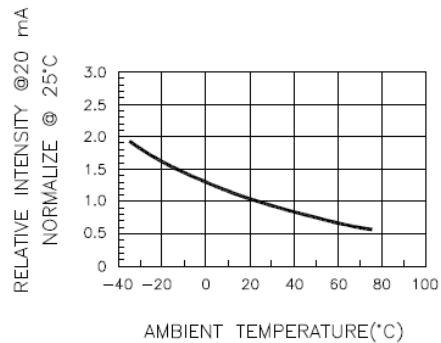


Fig.4 RELATIVE INTENSITY VS. TEMPERATURE

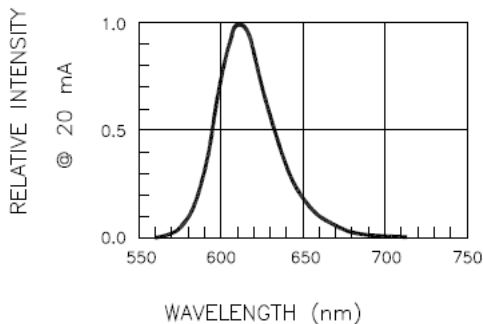


Fig.5 RELATIVE INTENSITY VS. WAVELENGTH

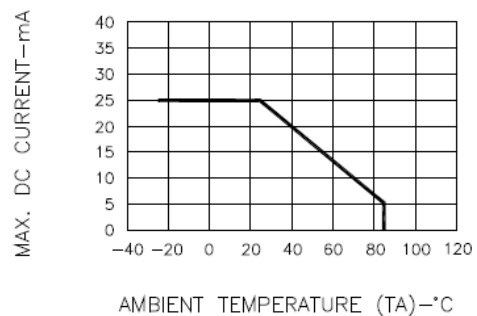


Fig.6 MAX. ALLOWABLE DC CURRENT VS. AMBIENT TEMPERATURE

Official Product	HNTD30 Series	Customer Part No.	Data Sheet No.
	*****	*****	HNTD30 Series
Specifications are subject to change without notice. Data and drawings herein are copyrighted.	May 02, 2013	Version of 1.0	Page 13/17

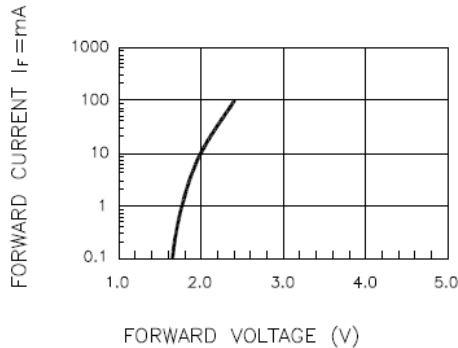
Characteristic Curves for UR


Fig.1 FORWARD CURRENT VS. FORWARD VOLTAGE

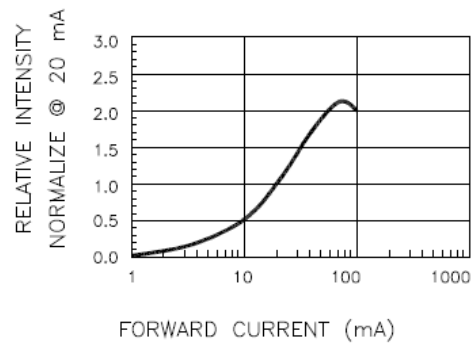


Fig.2 RELATIVE INTENSITY VS. FORWARD CURRENT

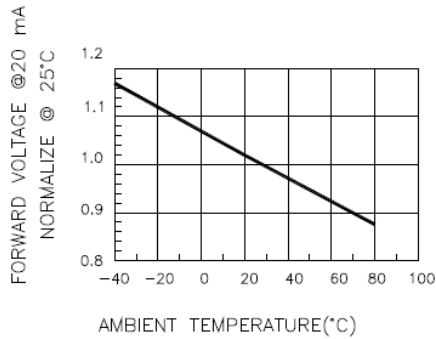


Fig.3 FORWARD VOLTAGE VS. TEMPERATURE

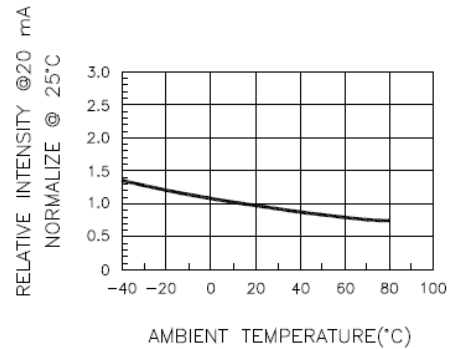


Fig.4 RELATIVE INTENSITY VS. TEMPERATURE

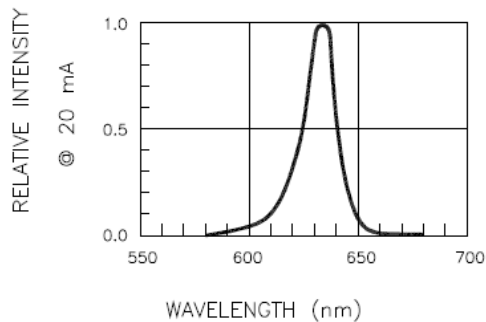


Fig.5 RELATIVE INTENSITY VS. WAVELENGTH

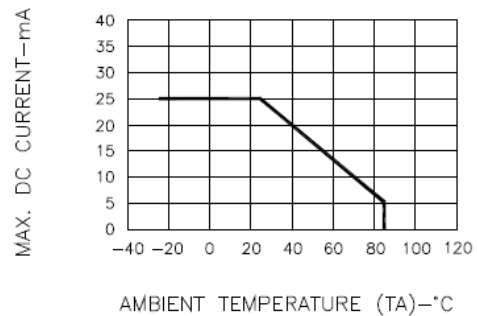


Fig.6 MAX. ALLOWABLE DC CURRENT VS. AMBIENT TEMPERATURE

Official Product	HNTD30 Series	Customer Part No.	Data Sheet No.
	*****	*****	HNTD30 Series
Specifications are subject to change without notice. Data and drawings herein are copyrighted.	May 02, 2013	Version of 1.0	Page 14/17

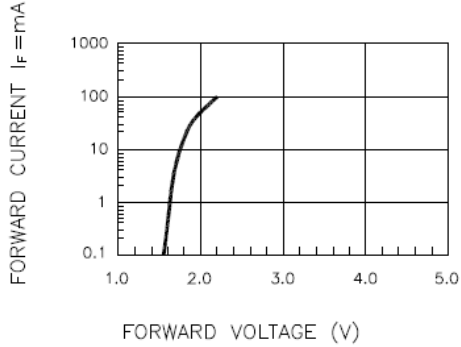
Characteristic Curves for USR


Fig.1 FORWARD CURRENT VS. FORWARD VOLTAGE

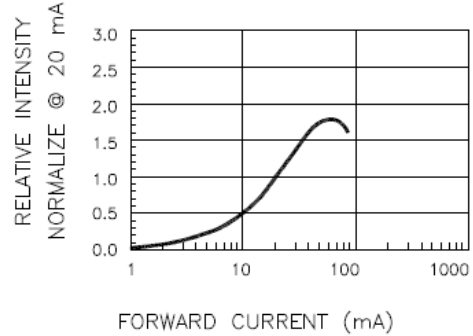


Fig.2 RELATIVE INTENSITY VS. FORWARD CURRENT

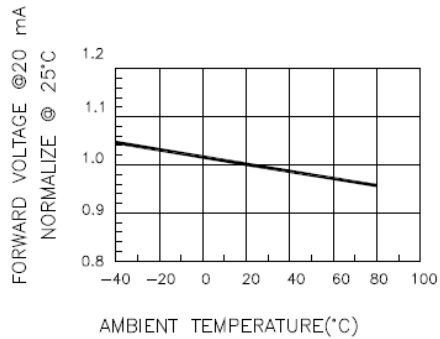


Fig.3 FORWARD VOLTAGE VS. TEMPERATURE

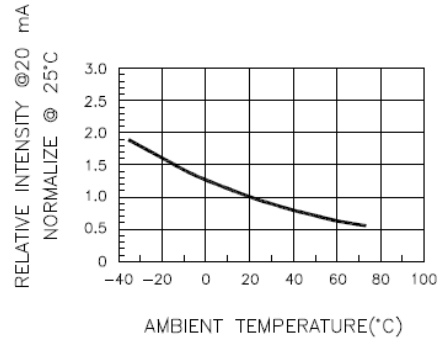


Fig.4 RELATIVE INTENSITY VS. TEMPERATURE

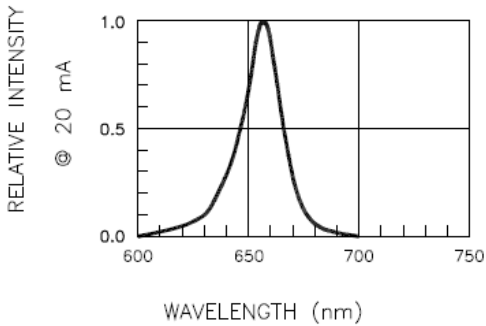


Fig.5 RELATIVE INTENSITY VS. WAVELENGTH


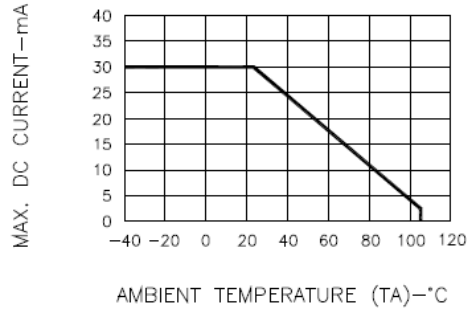


Fig.6 MAX. ALLOWABLE DC CURRENT VS. AMBIENT TEMPERATURE

Official Product	HNTD30 Series	Customer Part No.	Data Sheet No.
	*****	*****	HNTD30 Series
Specifications are subject to change without notice. Data and drawings herein are copyrighted.		May 02, 2013	Version of 1.0
			Page 15/17

Reflow Soldering

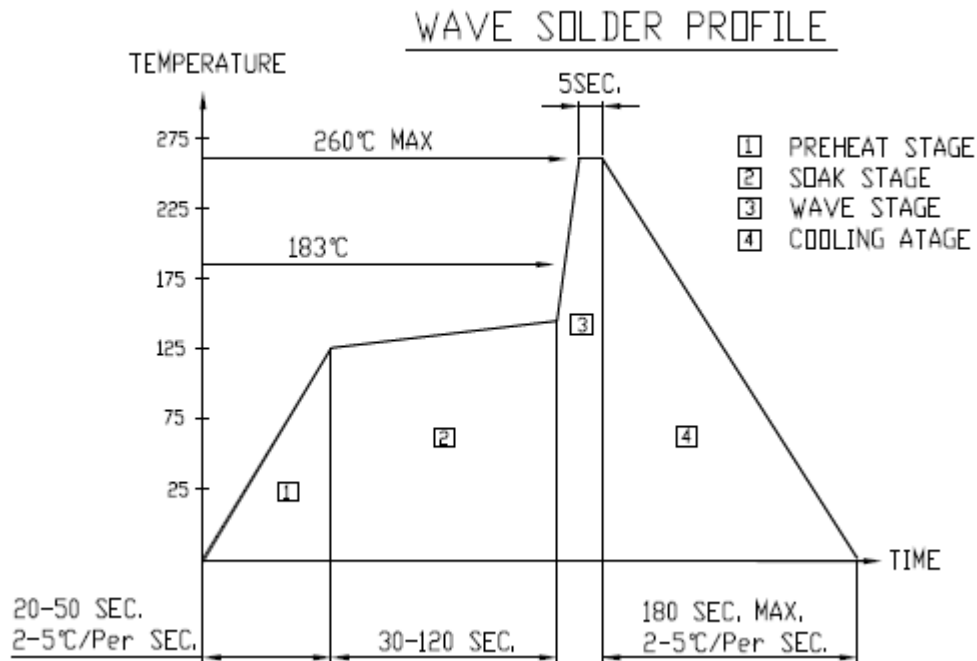

Soldering Iron

Basic Spec is ≤ 4 sec. when 260°C (+10°C \rightarrow -1 second). Power dissipation of Iron should be less than 15W. Surface temperature should be under 230°C

Rework

Rework should be completed within 4 second under 245°C

Official Product	HNTD30 Series	Customer Part No.		Data Sheet No.
	*****	*****		HNTD30 Series
Specifications are subject to change without notice. Data and drawings herein are copyrighted.		May 02, 2013	Version of 1.0	Page 16/17

Revision History

Changes since last revision	Page	Version No.	Revision Date
Initial Release for HNTD30		1.0	05-02-2013

Official Product	HNTD30 Series	Customer Part No.	Data Sheet No.
	*****	*****	HNTD30 Series
Specifications are subject to change without notice. Data and drawings herein are copyrighted.		May 02, 2013	Version of 1.0
			Page 17/17