

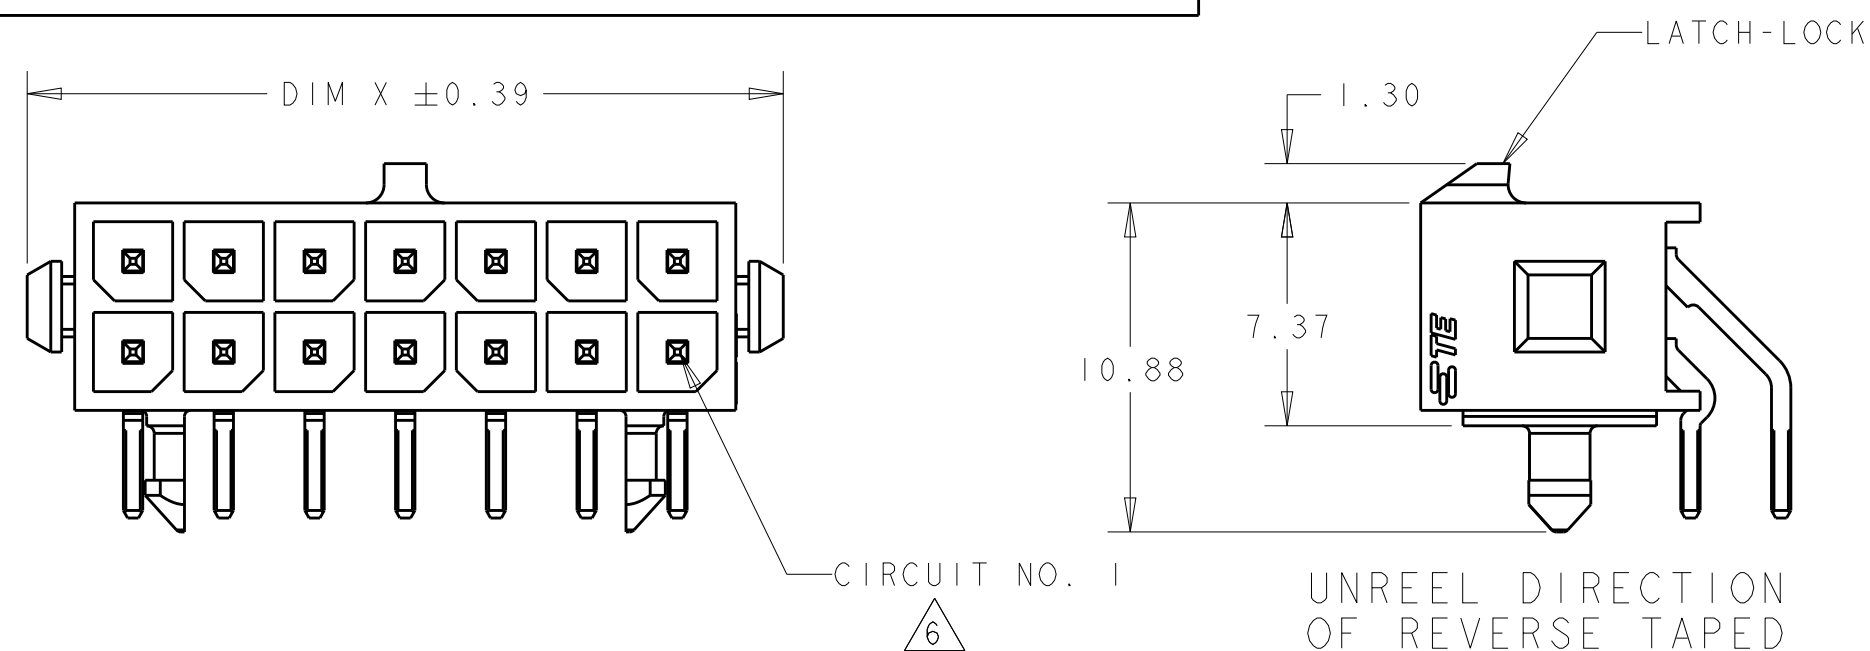



LOC	DIST	REVISONS					
CM	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			G	REVISED PER ECO-15-005484	28JULY2015	SC	DZ

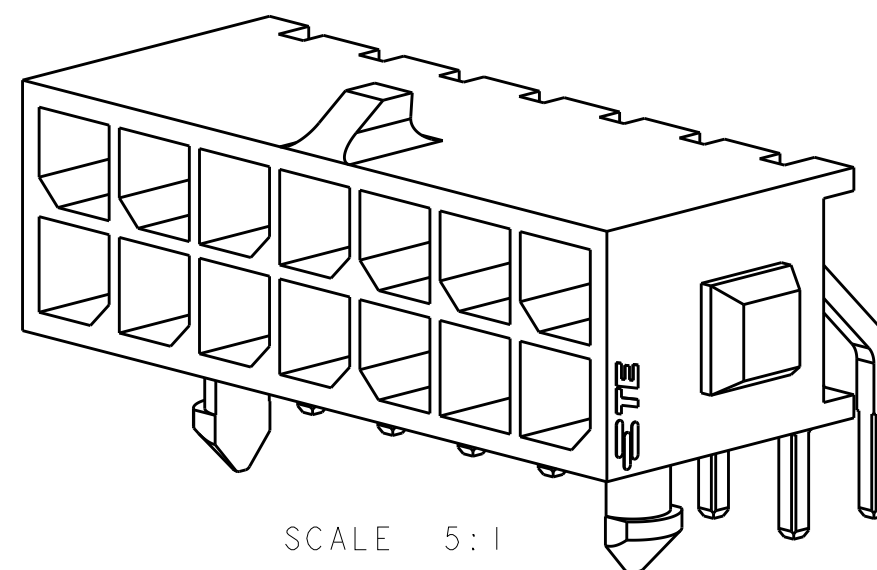

- 1 MATERIAL;
CONTACTS - BRASS.
UL 94V-0 RATED HIGH TEMP NYLON, COLOR; BLACK.
 - 2 PLATING;
CONTACTS - 0.76μm MINIMUM GOLD OVER 2.54μm MINIMUM NICKEL ON MATING AREA.
2.54μm TIN-LEAD MINIMUM OVER 2.54μm NICKEL MINIMUM ON SOLDER TAILS.
 - 4 RECOMMENDED PC BOARD THICKNESS OF 1.57.
 - 5 PLATING;
CONTACTS - 0.76μm MINIMUM GOLD OVER 2.54μm MINIMUM NICKEL ON MATING AREA.
2.54μm MATTE TIN MINIMUM OVER 2.54μm NICKEL MINIMUM ON SOLDER TAILS.
 - 6 CIRCUIT NUMBER 1 IS LOCATED AT THE BOTTOM RIGHT WITH THE LATCH-LOCK
ON TOP LOOKING INTO THE CAVITIES

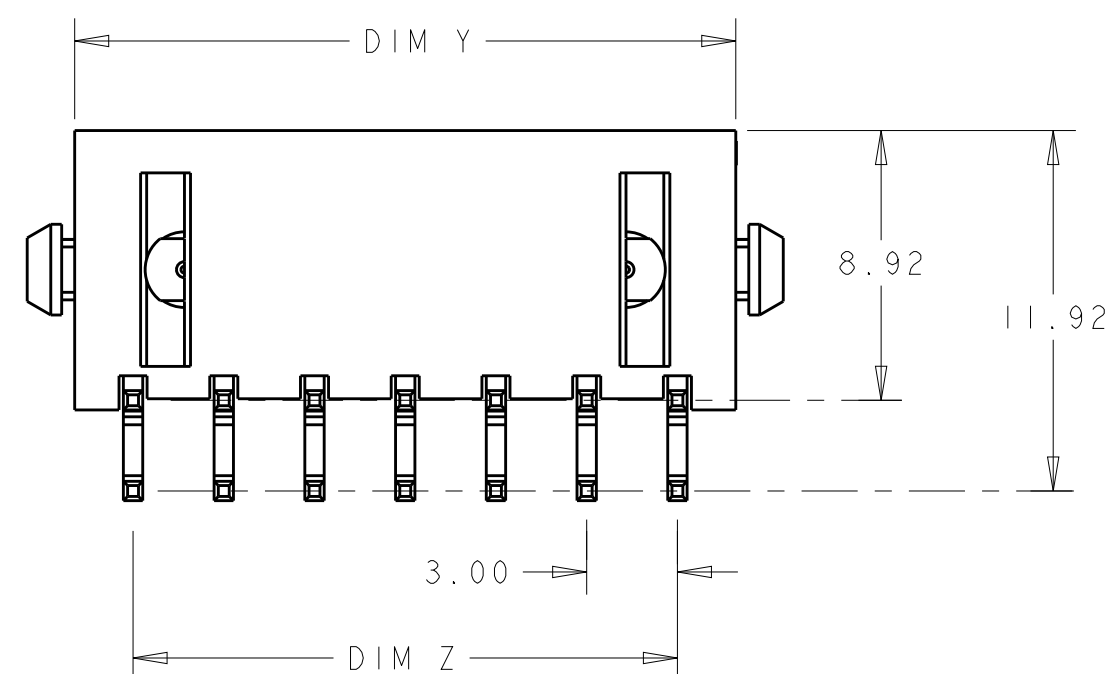

REVERSE TAPED		18.86	10.70	15.00	22.00	12	7-794620-2
TRAY		36.86	28.70	33.00	40.00	24	5-794620-4
TRAY		33.86	25.70	30.00	37.00	22	5-794620-2
TRAY		30.86	22.70	27.00	34.00	20	5-794620-0
TRAY		27.86	19.70	24.00	31.00	18	4-794620-8
TRAY		24.86	16.70	21.00	28.00	16	4-794620-6
TRAY		21.86	13.70	18.00	25.00	14	4-794620-4
TRAY		18.86	10.70	15.00	22.00	12	4-794620-2
TRAY		15.86	7.70	12.00	19.00	10	4-794620-0
TRAY		12.86	4.70	9.00	16.00	8	3-794620-8
TRAY		9.86	-	6.00	13.00	6	3-794620-6
TRAY		6.86	-	3.00	10.00	4	3-794620-4
TRAY		3.86	-	-	7.00	2	3-794620-2
TRAY		36.86	28.70	33.00	40.00	24	2-794620-4
TRAY		33.86	25.70	30.00	37.00	22	2-794620-2
TRAY		30.86	22.70	27.00	34.00	20	2-794620-0
TRAY		27.86	19.70	24.00	31.00	18	1-794620-8
TRAY		24.86	16.70	21.00	28.00	16	1-794620-6
TRAY		21.86	13.70	18.00	25.00	14	1-794620-4
TRAY		18.86	10.70	15.00	22.00	12	1-794620-2
TRAY		15.86	7.70	12.00	19.00	10	1-794620-0
TRAY		12.86	4.70	9.00	16.00	8	794620-8
TRAY		9.86	-	6.00	13.00	6	794620-6
TRAY		6.86	-	3.00	10.00	4	794620-4
TRAY		3.86	-	-	7.00	2	794620-2
PACKAGE	FINISH	DIM Y	DIM W	DIM Z	DIM X	NO. OF POSN.	PART NUMBER

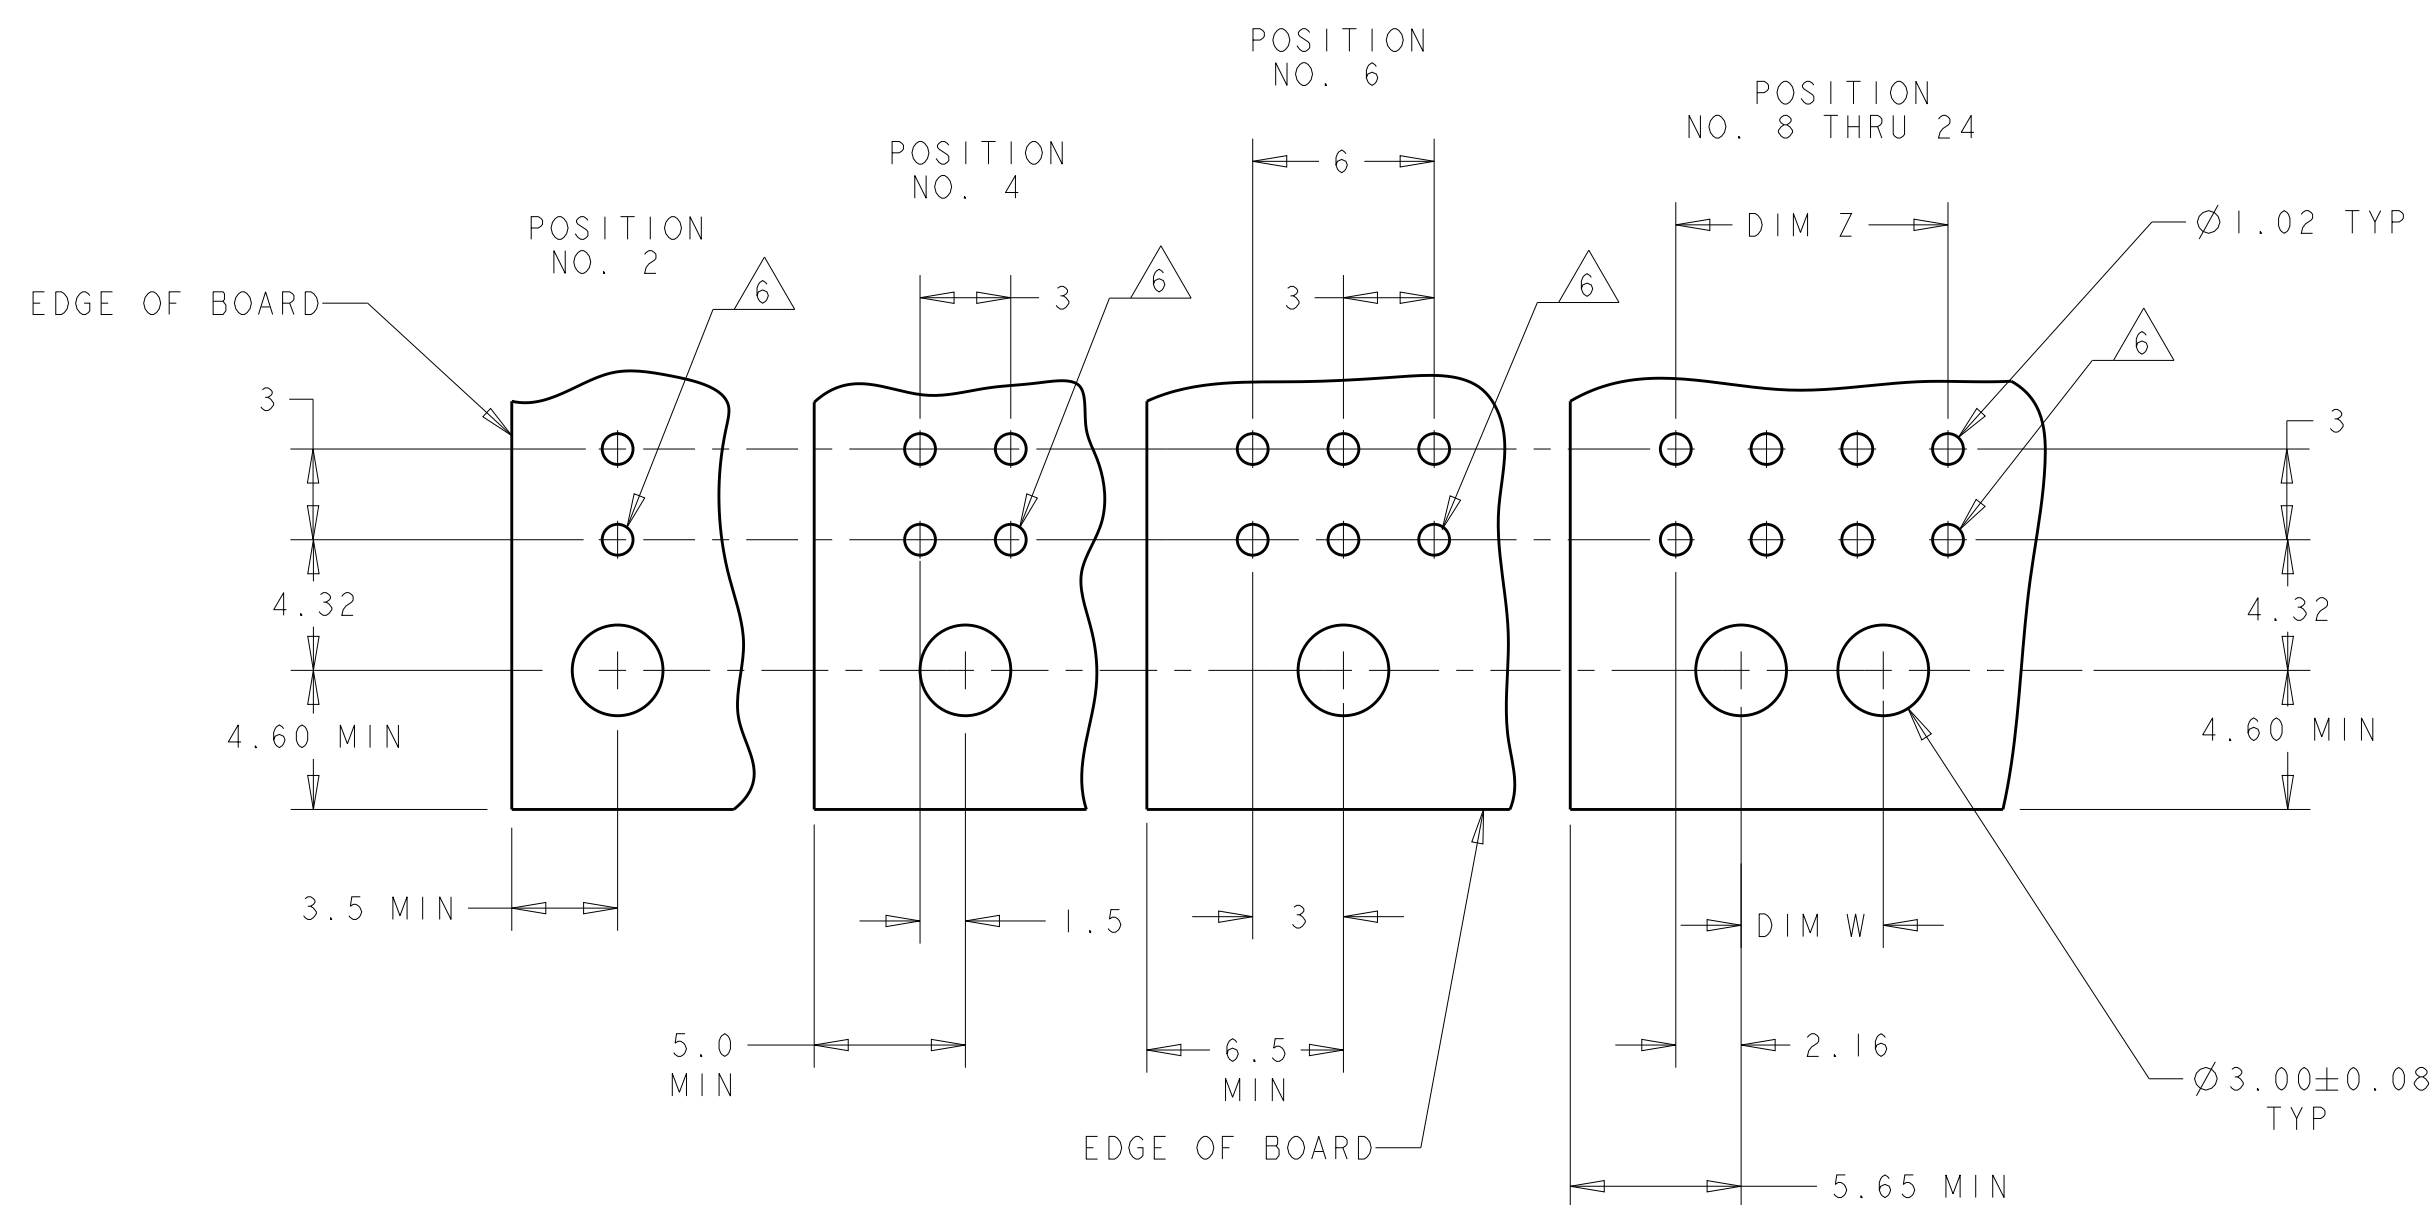

RECOMMENDED PCB LAYOUT (COMPONENT SIDE) 

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B. HAYMAKER 12AUG99 CHK K. COBLE 12AUG99 APVD K. COBLE 12AUG99		 TE Connectivity	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±. - 1 PLC ±. - 2 PLC ±0.13 3 PLC ±. - 4 PLC ±. - ANGLES ±. - FINISH		NAME THRU-HOLE, R/A, 30 GOLD HEADER, PLASTIC BOARDLOCK, DUAL ROW, MICRO MATE-N-LOK™	
		PRODUCT SPEC - APPLICATION SPEC -		SIZE CAGE CODE DRAWING NO RESTRICTED TO A200779 C-794620 -	
MATERIAL 		WEIGHT - CUSTOMER DRAWING		SCALE 4:1 SHEET 1 OF 1 REV G	
SEE TABLE					