THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION - ,- .
© COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL INTERNATIONAL RIGHTS RESERVED.

LOC	DIST
AD	39

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	D	REDRAWN PER ECO-09-004892	06MAR09	HMR	JG
	D1	REVISED PER ECO-09-020932	25AUG09	KK	AEG

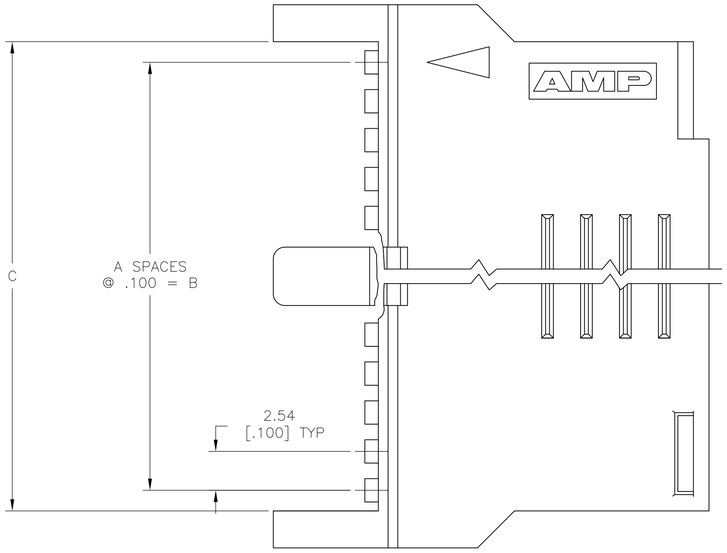

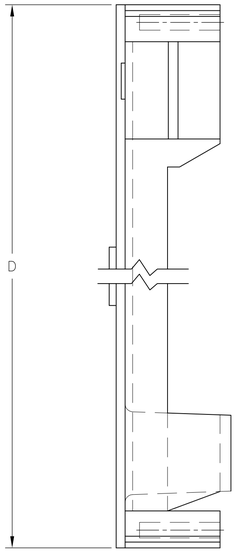

1. NO CENTER BAR ON THIS PART.
2. THIS COVER TO BE USED WITH PART NO. 102396
3. OBSOLETE PART NUMBER
4. MATERIAL: FLAME RETARDANT THERMOPLASTIC, COLOR: BLACK
5. OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

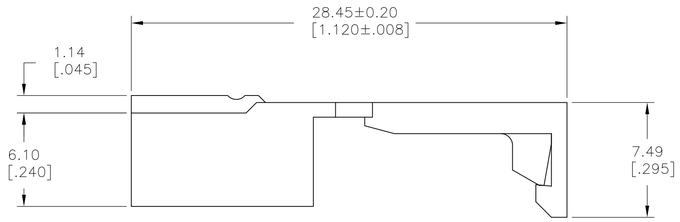

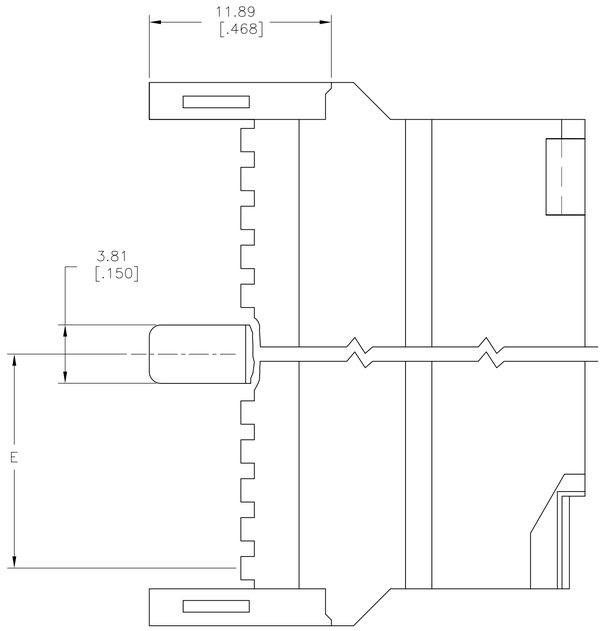

	E	D	C	B	A	NO OF POSN	PART NUMBER
	39.37[1.550]	86.26[3.396]	81.43[3.206]	78.74[3.100]	31	64	3 1-103268-5
	36.83[1.450]	81.18[3.196]	76.35[3.006]	73.66[2.900]	29	60	3 1-103268-4
5 OBSOLETE	30.48[1.200]	68.48[2.696]	63.65[2.506]	60.96[2.400]	24	50	1-103268-3
	26.67[1.050]	60.85[2.396]	56.03[2.206]	53.34[2.100]	21	44	3 1-103268-2
OBSOLETE	24.13[.950]	55.78[2.196]	50.95[2.006]	48.26[1.900]	19	40	1-103268-1
5 OBSOLETE	20.32[.800]	48.15[1.896]	43.33[1.706]	40.64[1.600]	16	34	1-103268-0
5 OBSOLETE	17.78[.700]	43.07[1.696]	38.25[1.506]	35.56[1.400]	14	30	103268-9
5 OBSOLETE	15.24[.600]	37.99[1.496]	33.17[1.306]	30.48[1.200]	12	26	103268-8
5 OBSOLETE	13.97[.550]	35.45[1.396]	30.63[1.206]	27.94[1.100]	11	24	103268-7
	11.43[.450]	30.38[1.196]	25.55[1.006]	22.86[.900]	9	20	103268-6
	8.89[.350]	25.29[.996]	20.47[.806]	17.78[.700]	7	16	3 103268-5
	7.62[.300]	22.76[.896]	17.93[.706]	15.24[.600]	6	14	3 103268-4
	6.35[.250]	20.22[.796]	15.39[.606]	12.70[.500]	5	12	3 103268-3
	5.08[.200]	17.68[.696]	12.85[.506]	10.16[.400]	4	10	3 103268-2
	1	15.14[.596]	10.31[.406]	7.62[.300]	3	8	3 103268-1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± –
3 PLC ± 0.13[.005]
4 PLC ± –
ANGLES ± –

MATERIAL 4

FINISH –

DWN RAGHAVENDRA 06MAR09
CHK JEFFREY GESFORD 06MAR09
APVD JEFFREY GESFORD 06MAR09

PRODUCT SPEC —

APPLICATION SPEC —

WEIGHT —

Tyco Electronics
Tyco Electronics Corporation
Harrisburg, PA 17105-3608

NAME COVER - HALF, MASS TERMINATION, AMPMODU, DOUBLE ROW, .100 X .100 C/L WITH CENTER BAR POLARIZATION FOR EJECT HEADER

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A1	00779	C-103268	—

CUSTOMER DRAWING | SCALE 4:1 | SHEET 1 OF 1 | REV D1