



1	2	3	4	5	6	7	8
REVISION		DESCRIPTION		DATE		DRAFTER	
A0		FIRST RELEASE		21. 04. 06		SQW	

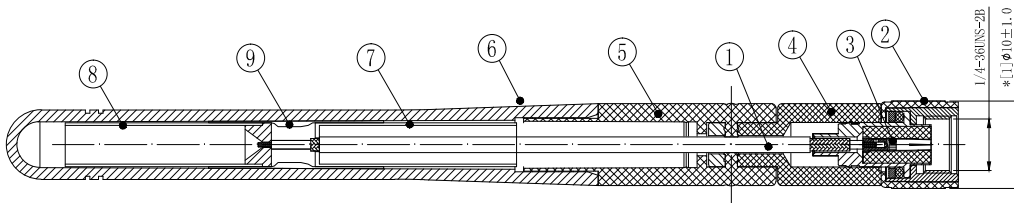


产品单重: 9.50g

技术要求:

- 1 电气特性: 特性阻抗:50Ω; 增益(Gain) 2dBi
适用频率范围:2.4GHz-2.5GHz VSWR:2.0 MAX;
5.15GHz-5.85GHz VSWR:2.5 MAX;
6.0GHz-7.12GHz VSWR:2.5MAX (以折弯测试为准)
- 2 尺寸检验: [*]为FAI检测项目; *为重点检测项目; ■为CPK管制项目。
- 3 外观检验: 目视全检。产品表面不得有刮伤、破损和脏污;
镀层色泽光亮均匀, 不得有氧化。
- 4 包装规范: 50PCS/包
- 5 环保要求: 产品及其使用之物料皆需要符合RoHS要求。

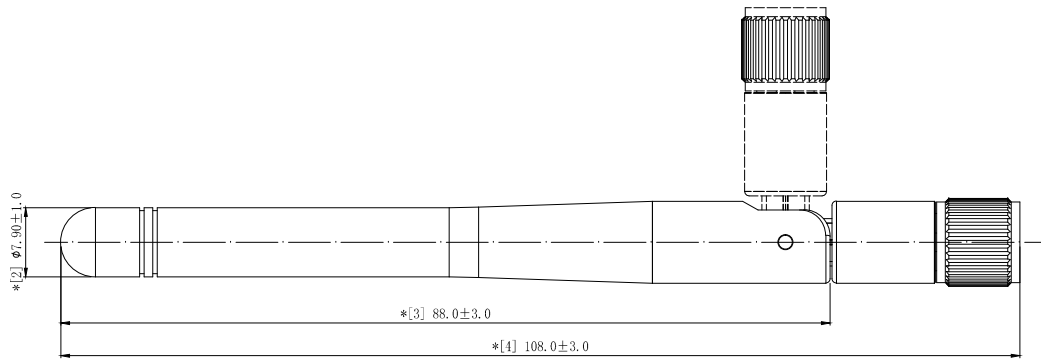

9	2TB050BK1-020	OD:5.0*L20.0mm, 无卤阻燃, 超薄型热缩套管黑色	1	---
8	2YG009	铜管: OD5.00*L23.0*OD0.60mm, 材质黄铜	1	---
7	2YG011	铜管: OD5.00*L23.0*OD1.55mm, 材质黄铜	1	---
6	2SBKG0200	套料, L67.5*09.35, TPEE 黑色	1	---
5	2SBKU32N3	上固定座, 09.35*L28.8, PC 黑色连铆钉式	1	---
4	2SBKD34N2	下固定座小孔, 09.35*L19.7*05.10, PC黑色	1	---
3	2LC15PF801-5	SMA 母针镀金OD1.5*L7.8mm, 镀金3u'	1	---
2	2LC15PM808-8	SMA公头OD10.0*L16.5*OD5.1mm, 黑色POM	1	---
1	2C5R17811BN1	微细同轴电缆, RG178, 银锡线, 棕色	1	---
No.	PART NUMBER	PART NAME & DESCRIPTION	Q' TY	REMARKS

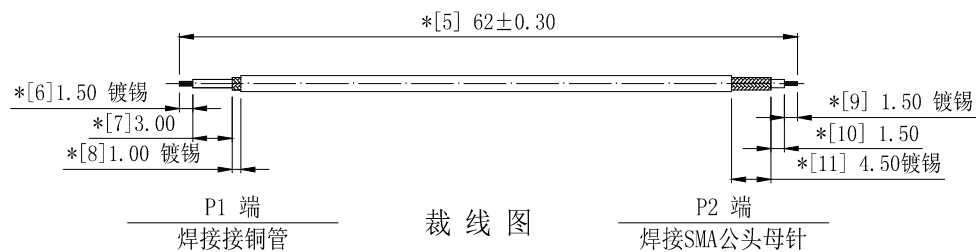

GENERAL TOLERANCE: LINEAR: X ±2.00 X.X ±1.00 X.XX ±0.50 X.XXX ±0.30 ANGLE: X° ±4.00° X.X° ±3.00° X.XX° ±2.00° X.XXX° ±1.00°		HJ-Tech 东莞市皇捷通讯科技有限公司 手机: 15015262131/13714786106	
FILE NAME: 产品图	TITLE: 射频天线组件 2dBi WiFi 6E天线, CD379黑色, RG178线+SMA公头母针, OD:10*1.08mm	P/N: wifi-6E 2dBi-RF2104007	
ENG/DATE: SQW/21. 04. 06	CHE/DATE:	UNIT: mm	SCALE: 1:1
APP/DATE:	REVISION: A0	SHEET: 1/1	

COMPLIANCE WITH THE REQUIREMENT: ■RoHS; □ HF; □ SONY SS-00259; □ OTHERS
*NO USING ESTRICTED AND BANNED SUBSTANCE