


PC card drilling dimensions(after plating)
(thickness 1.60±0.20mm)

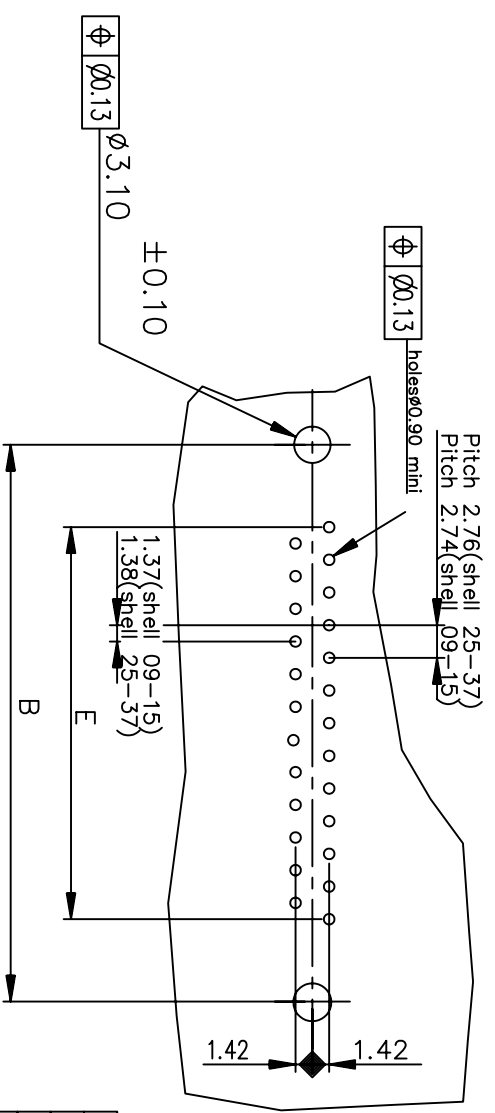

TIN LEAD PART NUMBER

SHELL	A±0.38	B±0.12	C±0.10	D±0.25	E±0.07	PART NUMBER
09	30.81	24.99	16.96	16.79	10.96	D09P24A.GX00
15	39.14	33.32	25.18	25.12	19.18	D15P24A.GX00
25	53.03	47.04	39.12	38.84	33.12	D25P24A.GX00
37	69.32	63.50	55.68	55.30	49.68	D37P24A.GX00

Protection: 4 ---> flash AU
6 ---> 0.76µ AU

LEAD FREE PART NUMBER

SHELL	A±0.38	B±0.12	C±0.10	D±0.25	E±0.07	PART NUMBER
09	30.81	24.99	16.96	16.79	10.96	D09P24A.GX00LF
15	39.14	33.32	25.18	25.12	19.18	D15P24A.GX00LF
25	53.03	47.04	39.12	38.84	33.12	D25P24A.GX00LF
37	69.32	63.50	55.68	55.30	49.68	D37P24A.GX00LF

Protection: 4 ---> flash AU
6 ---> 0.76µ AU

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:
SEE DRAWING C01-8646-0000

www.fciconnect.com

Dr	LELEON	1992/09/10	ANGULAR	tolerance std	projection	Scale
Eng	PESSON	1992/09/10	LINEAR	ISO 1302	ISO 406 ISO 1101	mm
Chr	NIRMAL.G	2010-02-03	0xx' ±2°	TOLERANCES UNLESS OTHERWISE SPECIFIED		
Appr	SUDHIR.V	2010-02-03	Product family	European Views		

FCI MALE CONNECTOR DELTA D ST
straight,solder type for

Part Number: C01-8646-0101
Rev. J

rev	ecn no	dr	date
C	-	JOU	1996/09/09
E	LS05-001	MPE	2005/03/11
F	LS05-0056	MPE	2005/06/27
G	LS06-0019	LGO	2006/02/07
H	LS06-0097	LGO	2006/07/29
J	I10-0038	NG	2010-02-03