


SAW Bandpass Filter 260102B



1. Features

- IF bandpass filter
- High attenuation
- Single-ended operation
- DIP Package
- Maximum Storage Temperature Range : -40℃ ~ 85℃
- Electrostatics Sensitive Device (ESD)

2. Package Dimension

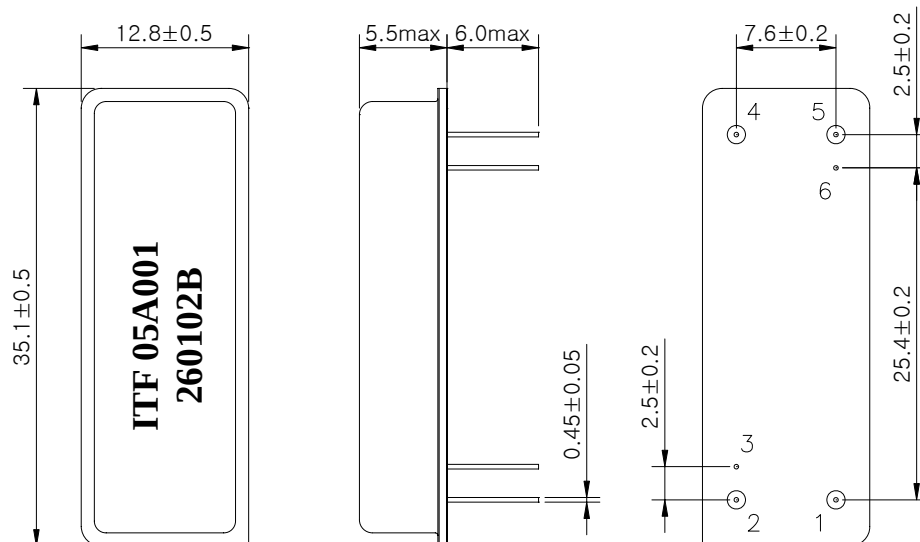

Package : D3512

Dimensions shown are nominal in millimeters

Base : Fe(SPCC), Au plating over Ni plated

Cap : Cu & Cr Alloy, Ni Plated

Termination : Kovar, Au Plated

Pin Configuration

1	Input
4	Output
2, 5	Ground
Other	Case ground

 Integrated Technology Future	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	260102B	
		Rev. Date	2005-10-10	
		Rev.	NW5012-CS01	1/5

SAW Bandpass Filter 260102B



3. Specifications

Fo = 160 MHz

Terminating source impedance : 50Ω and matching network

Terminating load impedance : 50Ω and matching network

Operating temperature range : -10℃ ~ +60℃		Minimum	Typical	Maximum
Center Frequency	MHz	206.4	206.5	206.6
Insertion Loss	dB	-	22.5	25
1dB Bandwidth	MHz	-	1.44	-
3dB Bandwidth	MHz	1.5	1.65	-
40dB Bandwidth	MHz	-	2.5	2.6
Amplitude Ripple (Fo +/- 0.5 MHz)	dB	-	0.5	1.0
Group Delay Variation (Fo +/- 0.5 MHz)	nsec	-	100	-
Absolute Delay	usec	-	3.31	-
Ultimate Rejection	dB	45	50	-
Temperature Coefficient of Frequency	ppm/℃ ²	-	-0.03	-

Notes :

- 1) All specifications are based on the matching schematic shown below
- 2) All specifications are measured by Agilent Network analyzer and full 2 port calibration
- 3) Electrical margin has been built into the design to account for the variations due to temperature drift and manufacturing tolerances
- 4) All attenuation measurements are measured relative to insertion loss


 Integrated Technology Future	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	260102B	
		Rev. Date	2005-10-10	
		Rev.	NW5012-CS01	2/5

SAW Bandpass Filter 260102B



4. Matching Schematic

(Actual matching values may vary due to PCB layout and parasitics)

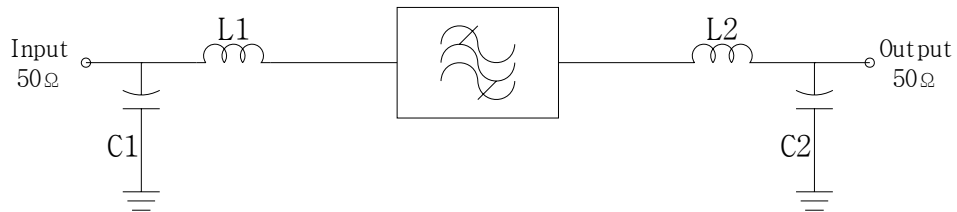

$L1 = 12 \text{ nH}$, $L2 = 12 \text{ nH}$

$C1 = 24 \text{ pF}$, $C2 = 22 \text{ pF}$

5. Marking Configuration

ITF¹⁾05A001²⁾

260102B³⁾

1) Manufacturer name

2) Lot Number



3) Part Number

	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	260102B	
		Rev. Date	2005-10-10	
		Rev.	NW5012-CS01	3/5

SAW Bandpass Filter 260102B







6. Typical Performance (at +25°C)

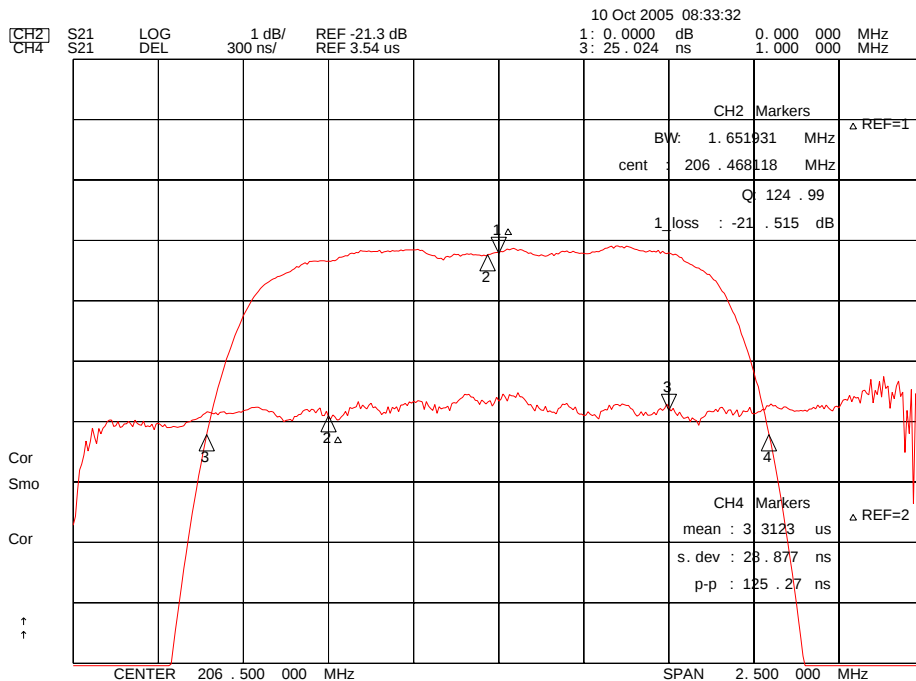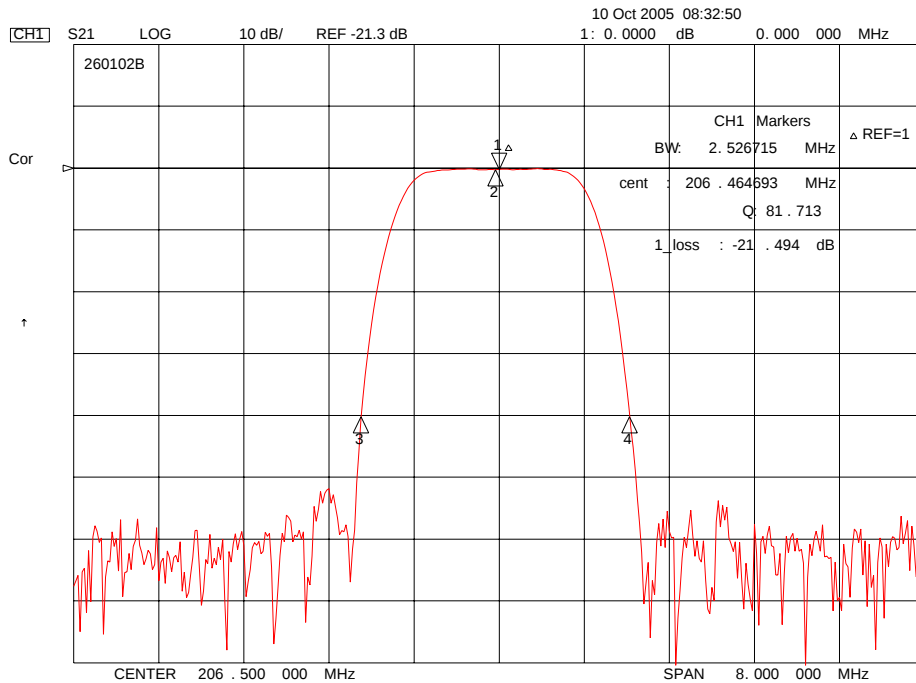

	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	260102B	
		Rev. Date	2005-10-10	
		Rev.	NW5012-CS01	4/5

SAW Bandpass Filter 260102B

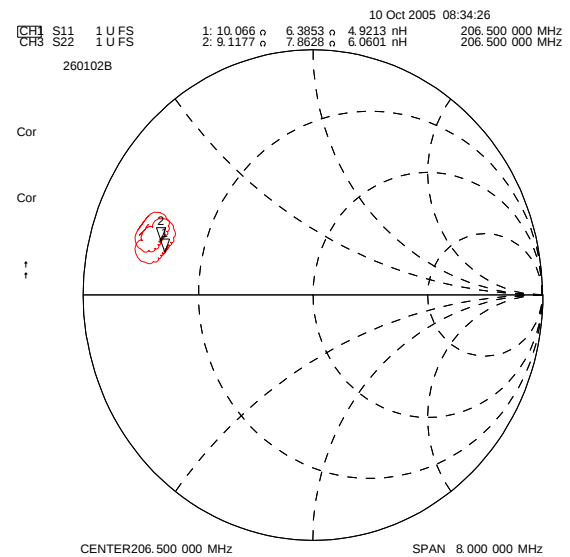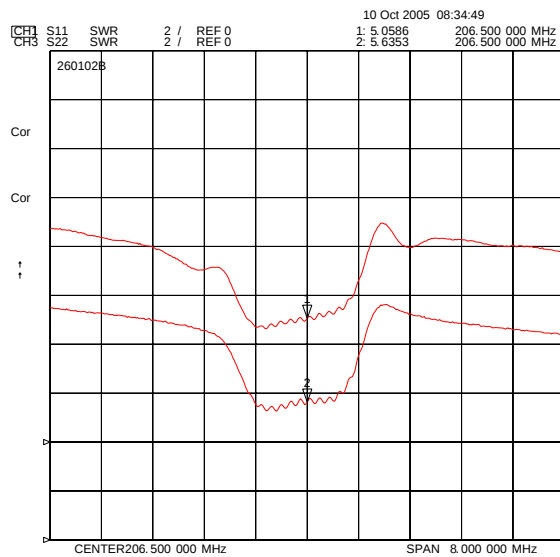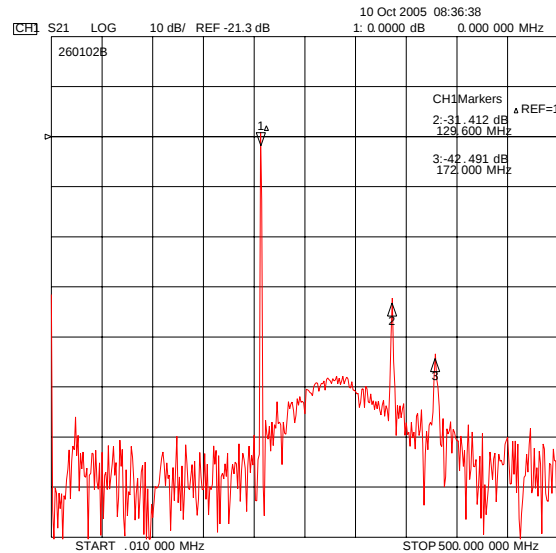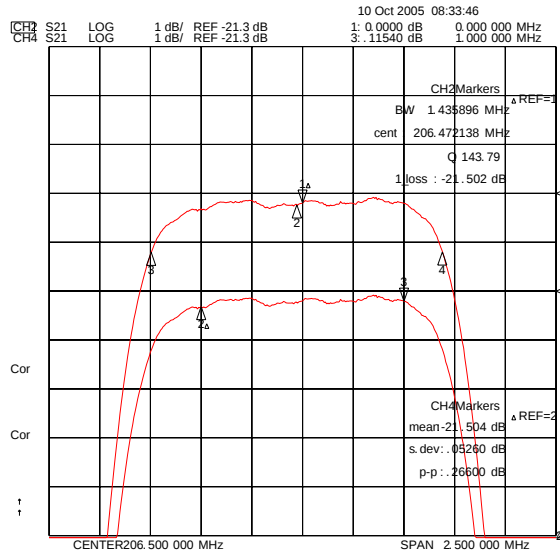

ITF Co., Ltd.
102-901, Bucheon Technopark 364,
Samjeong-Dong, Ojeong-Gu, Bucheon-City,
Gyeonggi-Do, Korea 421-809

Part No.

260102B

Rev. Date

2005-10-10

Rev.

NW5012-CS01

5/5