



# PRODUCT SPECIFICATION

REV A January 2011


Oscilent Controlled Document

Ordering Code / Part Number	Product Description
813-SL140.0M-10B	Low-Loss 140MHz IF SAW Filter 9.1MHz Bandwidth

## Specification Contents

- o Mechanical Dimensions
- o Test Circuit
- o Maximum Ratings
- o Electrical Specification
- o Frequency Response


## Notes

- o Electrostatic Sensitive Device (ESD) 
- o Avoid excessive ultrasonic exposure
- o Solderability compatible with JEDEC J-STD-020C Pb-free process, 260°C peak reflow temperature
- o This product complies with EU directive 2002/95/EC (RoHS compliance)






## Mechanical Dimensions (mm)

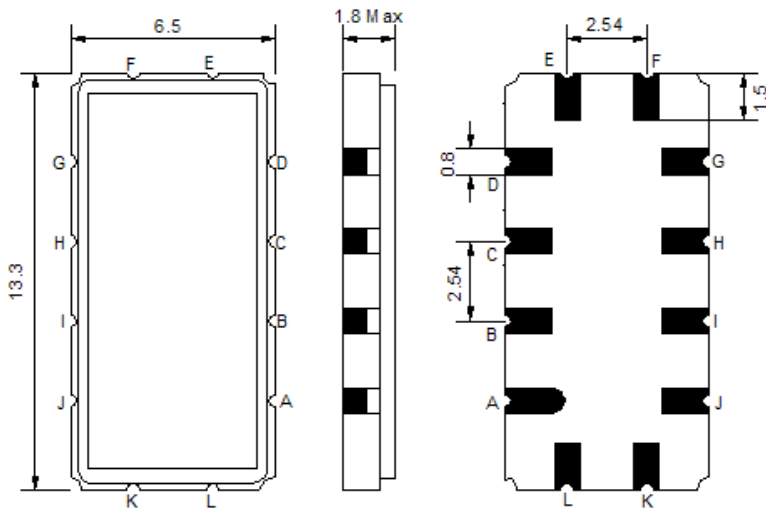

Pin Description	
A, B, C, D, F, G, H, I, J	Ground
K	Input
E	Output

## Test Circuit

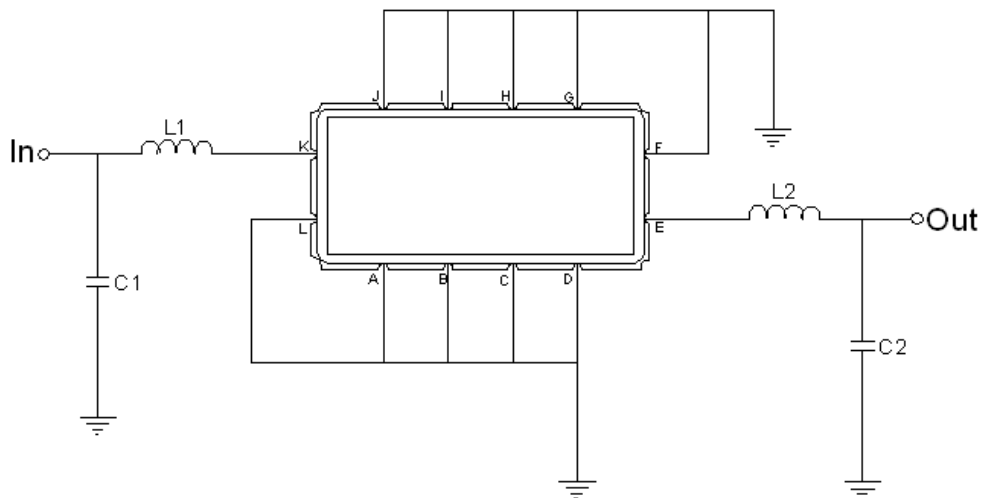

Test Fixture & Values	
Input	L1=47nH Q > 40, C1=51pF
Output	L2=47nH Q > 40, C2=51pF
Source/Load Impedance	50 Ω

**Maximum Ratings**

Parameters Description	Unit	Minimum	Typical	Maximum
Operating Temperature Range	°C	-30	-	+80
Storage Temperature Range	°C	-40	-	+85
Maximum DC Voltage	V	-	-	10
Maximum Input Power	dBm	-	-	10
Source Impedance (single ended) <sup>(1)</sup>	Ω	-	50	-
Load Impedance (single ended) <sup>(1)</sup>	Ω	-	50	-

Notes: With Matching Network (Ref. Testing Environment Circuit as shown above).

Those impedances could be modified with different impedance values and/or structures, if necessary.

**Electrical Specification**

Parameters Description	Unit	Minimum	Typical	Maximum
Center Frequency (Fo)	MHz	139.85	140.0	140.15
Insertion Loss at Fo	dB	-	13.6	15.0
Amplitude Ripple Variation	dB <sub>p-p</sub>	-	0.4	1.0
Group Delay Variation	nsec	-	64	100
Absolute Delay at Fo	μsec	-	0.97	-
Temperature Coefficient	ppm/°C	-	-20	-
Bandwidth at -1.0 dB	MHz	9.1	9.3	-
Bandwidth at -3.0 dB	MHz	9.9	10.1	-
Bandwidth at -40.0 dB	MHz	-	12.9	13.1
Bandwidth at -45.0 dB	MHz	-	13.2	14.0
Relative Attenuation:				
Lower sidelobe	dB	45	48	-
Upper sidelobe	dB	41	45	-



## Frequency Response

