




## Heyco® Rubber Grommets

For Panels .125" (3,2 mm) to .188" (4,8 mm) Thick

- **Used to protect through holes.** Help eliminate sharp edges so your wires are protected and add aesthetic value to your application.
- 113 sizes available that will accommodate mounting holes ranging from .250" (6,4 mm) to holes as large as 2.375" (60,3 mm) diameter and panel thicknesses from .063" (1,6 mm) to .188" (4,8 mm).
- Rubber grommets are constructed of SBR (unless otherwise noted) with an operating temperature range of -40°F (-40°C) to 221°F (105°C).
- SBR grommets have good water resistant characteristics and are suitable for most moderate chemicals and wet or dry organic acids.
- Provide vibration dampening.

MOUNTING HOLE DIAMETER		PART NO. Black	DESCRIPTION	MATERIAL	PART DIMENSIONS					
in.	mm.				A Inside Diameter		B Head Diameter		C Overall Height	
					in.	mm.	in.	mm.	in.	mm.
<b>For .125" (3,2 mm) Thick Panels (continued)</b>										
1.375	34,9	<b>G1322</b>	RG 1375-32-4	SBR	1.000	25,4	1.750	44,5	.500	12,7
1.500	38,1	<b>G1350</b>	RG 1500-40-4	SBR	1.250	31,8	1.875	47,6	.406	10,3
1.625	41,3	<b>G1363</b>	RG 1625-42-4	SBR	1.313	33,4	2.000	50,8	.438	11,1
		<b>G1364</b>	RG 1625-44-4	SBR	1.375	34,9	1.875	47,6	.406	10,3
1.750	44,5	<b>G1371</b>	RG 1750-48-4	SBR	1.500	38,1	2.125	54,0	.500	12,7
2.000	50,8	<b>G1392</b>	RG 2000-56-4	SBR	1.750	44,5	2.375	60,3	.375	9,5
2.500	63,5	<b>G1423</b>	RG 2.5-68-4	SBR	2.125	54,0	2.875	73,0	.438	11,1
<b>For .156" (4,0 mm) Thick Panels</b>										
.500	12,7	<b>G1094</b>	RG 500-12-5	SBR	.375	9,5	.688	17,5	.313	8,0
.750	19,1	<b>G1181</b>	RG 750-16-5	SBR	.500	12,7	.938	23,8	.406	10,3
1.500	38,1	<b>G1348</b>	RG 1500-38-5	SBR	1.188	30,2	1.750	44,5	.406	10,3
<b>For .188" (4,8 mm) Thick Panels</b>										
.312	7,9	<b>G1022</b>	RG 312-6-6	SBR	.188	4,8	.438	11,8	.313	8,0
.375	9,5	<b>G1034</b>	RG 375-6-6	SBR	.188	4,8	.625	15,9	.375	9,5
.437	11,1	<b>G1057</b>	RG 437-8-6	SBR	.250	6,4	.625	15,9	.313	8,0
.562	14,3	<b>G1110</b>	RG 562-6-6	Nitrile	.188	4,8	.750	19,1	.313	8,0
		<b>G1115</b>	RG 562-10-6	SBR	.313	8,0	.813	20,7	.375	9,5
		<b>G1116</b>	RG 562-10-6A	SBR	.313	8,0	.813	20,7	.438	11,1
		<b>G1120</b>	RG 562-12-6	SBR	.375	9,5	.813	20,7	.375	9,5
.625	15,9	<b>G1133</b>	RG 625-12-6	SBR	.375	9,5	.875	22,2	.438	11,1
		<b>G1135</b>	RG 625-13-6	Nitrile	.400	10,2	1.100	27,9	.438	11,1
.687	17,5	<b>G1153</b>	RG 687-14-6	SBR	.438	11,1	.938	23,8	.438	11,1
.750	19,1	<b>G1172</b>	RG 750-10-6	SBR	.313	8,0	1.000	25,4	.438	11,1
.812	20,6	<b>G1194</b>	RG 812-16-6	SBR	.500	12,7	1.063	27,0	.438	11,1
		<b>G1199</b>	RG 812-18-6	SBR	.563	14,3	1.063	27,0	.438	11,1
.875	22,2	<b>G1213</b>	RG 875-18-6	SBR	.563	14,3	1.063	27,0	.438	11,1
		<b>G1219</b>	RG 875-20-6	SBR	.625	15,9	1.125	28,6	.438	11,1
1.000	25,4	<b>G1256</b>	RG 1000-22-6	SBR	.688	17,5	1.313	33,4	.500	12,7
		<b>G1261</b>	RG 1000-24-6	SBR	.750	19,1	1.250	31,8	.563	14,3
1.062	27,0	<b>G1272</b>	RG 1062-24-6	SBR	.750	19,1	1.375	34,9	.500	12,7
1.250	31,8	<b>G1306</b>	RG 1250-28-6	SBR	.875	22,2	1.625	41,3	.563	14,3
		<b>G1312</b>	RG 1250-32-6	SBR	1.000	25,4	1.500	38,1	.438	11,1
1.375	34,9	<b>G1323</b>	RG 1375-32-6	SBR	1.000	25,4	1.750	44,5	.563	14,3
		<b>G1329</b>	RG 1375-36-6	SBR	1.125	28,6	1.875	47,6	.500	12,7
1.500	38,1	<b>G1351</b>	RG 1500-40-6	EPDM	1.250	31,8	2.000	50,8	.625	15,9
1.750	44,5	<b>G1372</b>	RG 1750-48-6	SBR	1.500	38,1	2.125	54,0	.563	14,3
2.000	50,8	<b>G1390</b>	RG 2000-52-6	SBR	1.625	41,3	2.250	57,2	.750	19,1
2.200	55,9	<b>G1404</b>	RG 2.200-64-6	SBR	2.000	50,8	2.750	69,9	.560	14,2
2.375	60,3	<b>G1414</b>	RG 2.375-64-6	PVC	2.000	50,8	2.750	69,9	.560	14,2

Standard color black.

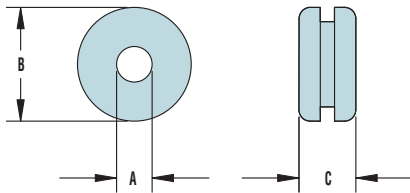

Quick Specs

Material  
Temperature Rating

SBR, Nitrile, EPDM, or PVC  
-40°F (-40°C) to 221°F (105°C)

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Heyco:

[G1351](#) [G1135](#) [G1272](#) [G1329](#) [G1404](#) [G1219](#) [G1256](#) [G1392](#) [G1153](#) [G1022](#) [G1199](#) [G1181](#) [G1172](#) [G1306](#)  
[G1364](#) [G1371](#) [G1213](#) [G1372](#) [G1116](#) [G1414](#) [G1348](#) [G1322](#) [G1110](#) [G1034](#) [G1057](#) [G1115](#) [G1194](#) [G1350](#)  
[G1094](#) [G1120](#) [G1363](#) [G1261](#) [G1133](#) [G1423](#) [G1390](#) [G1323](#) [G1312](#)