


Surface Mount Directional Coupler

50Ω 5 to 900 MHz

ADC-10-1R+ ADC-10-1R



CASE STYLE: CD542
PRICE: \$7.95 ea. QTY (10-49)

**+ RoHS compliant in accordance
with EU Directive (2002/95/EC)**

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

Maximum Ratings


Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C

Permanent damage may occur if any of these limits are exceeded.


Pin Connections

INPUT	1
OUTPUT	6
COUPLED	3
GROUND	2,5
ISOLATE (DO NOT USE)	4

Outline Drawing

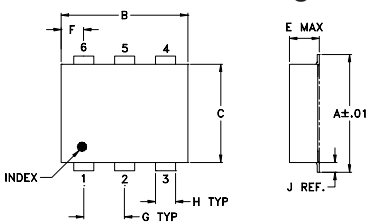

PCB Land Pattern




Suggested Layout,
Tolerance to be within ±.002

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
.272	.310	.220	.100	.112	.055	.100
6.91	7.87	5.59	2.54	2.84	1.40	2.54
H	J	K	L	wt		
.030	.026	.065	.300	grams		
0.76	0.66	1.65	7.62	0.20		

Demo Board MCL P/N: TB-32 Suggested PCB Layout (PL-094)



- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
3. DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
4. DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Features

- wideband, 5-900 MHz
- low mainline loss, 0.8 db typ.
- excellent coupling flatness, ±0.2 typ.
- aqueous washable
- protected by U.S Patents 6,133,525 & 6,140,887

Applications

- communications
- cable tv

Directional Coupler Electrical Specifications


FREQ. (MHz)	COUPLING (dB)		MAINLINE LOSS ¹ (dB)			DIRECTIVITY (dB)			VSWR (:1)	POWER INPUT, W							
	Nom.	Flatness	L	M	U	L	M	U		Typ.	L Max.	MU Max.					
f _c -f _u			Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.								
5-900	10.5±0.5	±0.5	0.7	1.2	0.8	1.2	0.9	1.5	40	25	30	20	18	12	1.3	1.0	1.0

L= 5-50 MHz M= 50-450 MHz U= 450-900 MHz
1. Mainline loss includes theoretical power loss at coupled port.


Typical Performance Data

Frequency (MHz)	Mainline Loss (dB) In-Out	Coupling (dB) In-Cpl	Directivity (dB)	Return Loss (dB)		
				In	Out	Cpl
5.00	0.73	10.46	39.26	23.33	32.99	20.92
25.00	0.73	10.47	41.83	23.80	33.86	21.15
50.00	0.72	10.46	42.49	23.65	33.70	20.95
100.00	0.72	10.46	41.16	23.19	31.77	20.42
200.00	0.76	10.54	35.13	21.89	27.73	18.85
300.00	0.82	10.62	30.28	20.41	24.77	17.13
450.00	0.75	10.54	24.90	18.54	21.73	14.98
600.00	0.86	10.71	20.67	17.18	19.54	13.38
750.00	0.80	10.63	17.31	16.29	17.92	12.21
900.00	1.03	10.88	14.39	15.79	16.77	11.46


ADC-10-1R MAINLINE LOSS

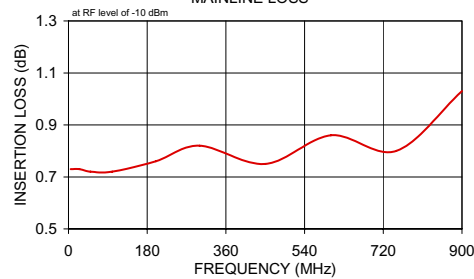


ADC-10-1R COUPLING & DIRECTIVITY

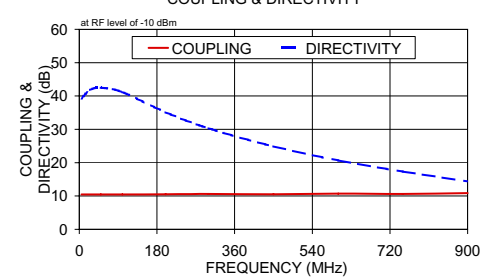

ADC-10-1R RETURN LOSS

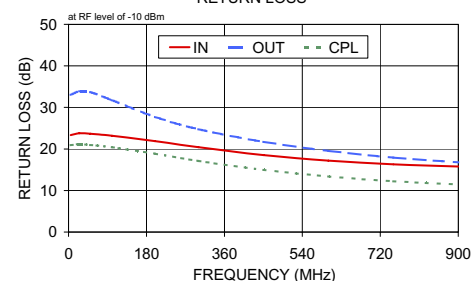

Electrical Schematic

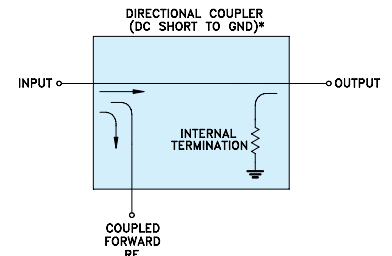

* ELECTRICAL SCHEMATIC IS FOR DIRECTIONAL COUPLER WITH INTERNAL TRANSFORMER(S) THAT ROUTES DC FROM RF PORTS TO GROUND.

Mini-Circuits®
ISO 9001 ISO 14001 AS 9100 CERTIFIED

minicircuits.com

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

IF/RF MICROWAVE COMPONENTS

REV. C
M119986
ED-6704/1
ADC-10-1R
WZ/TD/CP/AM
081111