



20-30 Watt Universal 3-Wire Input Adapter PSA31U Single Output Switching Power Supply



Features

- Low Cost
- Class B EMI
- Non-vented/Spill-proof Case
- Low Profile Design

Applications

- Portable Equipment
- Peripherals
- Networking
- Gaming Machines

Safety Approvals

- cUL/UL
- CE
- C-Tick
- TÜV
- SAA
- Meeting Cal. Prop. 65

Mechanical Characteristics

- Length: 113mm (4.45in)
- Width: 61mm (2.4in)
- Height: 34mm (1.34in)
- Weight: 242g (8.5oz.)

Output Specifications

Model	DC Output Voltage	Load		Ripple (1) P-P (max.)	Regulation L-L
		Min.	Max.		
PSA31U-050	+5V	0A	4A	50mV	±5%
PSA31U-090	+9V	0A	2.2A	90mV	±5%
PSA31U-120	+12V	0A	2.5A	120mV	±5%
PSA31U-150	+15V	0A	2A	150mV	±5%
PSA31U-180	+18V	0A	1.6A	180mV	±5%
PSA31U-240	+24V	0A	1.25A	240mV	±5%
PSA31U-480	+48V	0A	0.625A	200mV	±5%

(1) Measured with by-pass capacitors 0.1uf/10uf at output connector terminal and oscilloscope set at 20 Mhz.

Phihong is not responsible for any error and change. Please consult the factory and visit www.phihong.com for the most up-to-date specifications.

INPUT:

AC Input Voltage Rating
100 to 240VAC

AC Input Voltage Range
90 to 264VAC

AC Input Frequency
47 to 63Hz

Input Current
1A (rms) Max. @ 115VAC
0.5A (rms) Max. @ 230VAC

Leakage Current
3.5mA Max.

Inrush Current (cold)
30A for 115VAC at Max. load
60A for 230VAC at Max. load
(Cold start @ ambient 25°C)

OUTPUT:

Efficiency
70% typical

Hold-up Time
12mS Min. @ 120VAC and Max. load

Over-voltage Protection
>130% over-voltage detection, adapter will be shut down

Over-current Protection

Output equipped with short circuit protection – auto restart

Short Circuit Protection

Output can be shorted without damage

ENVIRONMENTAL:

Temperature

Operation 0 to +45°C
Non-operation -30 to +85°C

Humidity

Operation 8 to 90%

Emissions

FCC Class B
EN55022 Class B
VCCI Class B

Immunity

61000-4-2 Level 4 ESD
61000-4-4 Level 2 FET/Burst
61000-4-5 (L-N) Level 2 Surge
(L-G) Level 3


Dielectric Withstand (Hi-pot) Test

Primary to Secondary: 1500VAC for 1 minute, 10mA

DC Output Connector

2.1x5.5mm Center Positive Standard

Dimension Diagram Unit: mm

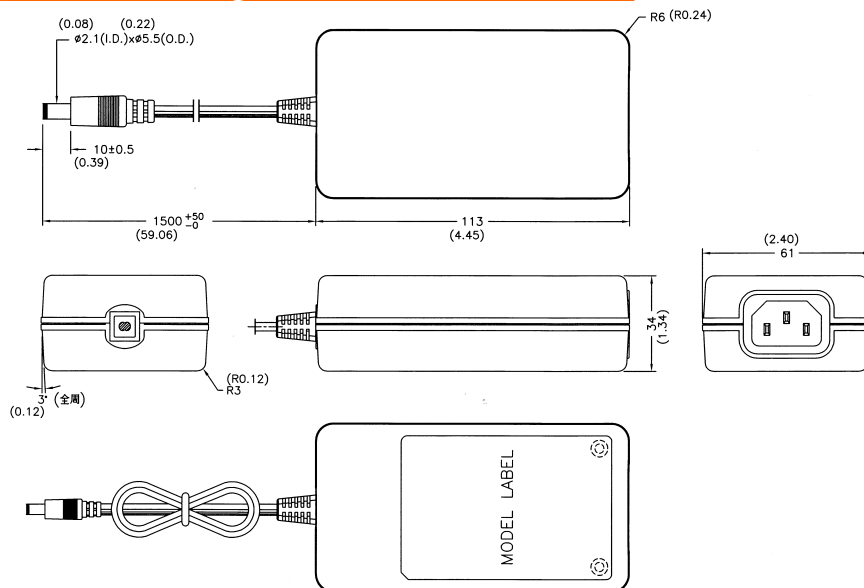

Copyright © Each Manufacturing Company.

All Datasheets cannot be modified without permission.

This datasheet has been download from :

www.AllDataSheet.com

100% Free DataSheet Search Site.

Free Download.

No Register.

Fast Search System.

www.AllDataSheet.com