

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0192030086](#)
Status: **Active**
Description: Krimptite™ Temp-Term Ring Tongue Terminal for 14 to 16 AWG Wire, Stud Size 10, Mylar Tape Carrier

Documents:
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification

UL E32244

General

Product Family Ring and Spade Terminals
Series [19203](#)
Comments 1200° F (649°C)
Crimp Quality Equipment Yes
Mil-Spec N/A
Product Name Krimptite™, Temp-Terms
Type Ring

Physical

Barrel Type Closed
Insulation None
Material - Plating Mating Tin
Packaging Type Adhesive Tape on Reel
Stud Size 10 (M5)
Wire Size AWG 14, 16
Wire Size mm² 1.00 - 2.50

Material Info

Old Part Number BB-U-137-10T

Reference - Drawing Numbers

Sales Drawing BB-CD10104



Series
image - Reference only

EU RoHS

**ELV and RoHS
Compliant**

REACH SVHC

Not Reviewed

Halogen-Free

Status

Not Reviewed

China RoHS



**Need more information on product
environmental compliance?**

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of
Compliance, [click here](#)

Please visit the [Contact Us](#) section for any
non-product compliance questions.

Search Parts in this Series

[19203Series](#)

Application Tooling | FAQ

*Tooling specifications and manuals are
found by selecting the products below.
Crimp Height Specifications are then
contained in the Application Tooling
Specification document.*

Global

Description	Product #
ATP Perishable	0190270068
Tool Kit used in ATP presses that process product on tape	
Mini-Mac™	0638853900
Applicator, Air Feed Mylar Tape	

NOTES:


① MAT'L: PURE NICKEL

PLATING: NONE

STUD SIZES: (±.005)

02 = .094 413 = .413
 04 = .119 209 = .209
 06 = .146
 08 = .173
 10 = .198
 14 = .265
 56 = .328
 38 = .390

ALL DIMENSIONS = INCHES
 M M

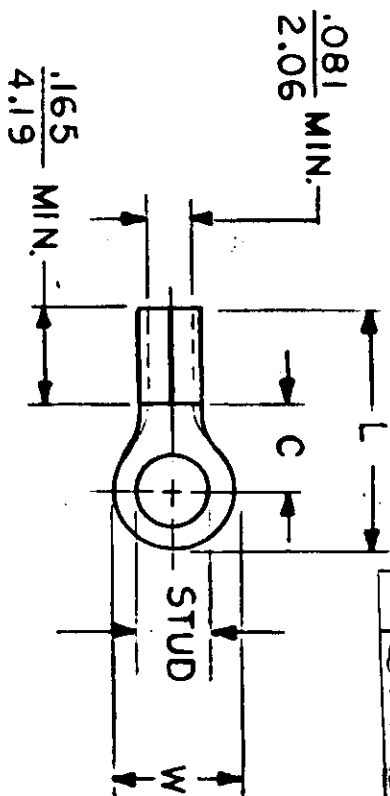

FILE NO.

BB-CD-101-04

A

SHOW -123 & -125 in direct
 FOR 70818 @ 97-4-29

WIRE SIZE: 16-14 AWG
 1.0-2.5 MM²

PART NUMBER	"W"	"C"	"L"	AVAILABLE STUD SIZES	
	±.010	MIN.	MAX.		
	.534 13.56	.554 14.07	1.036 26.31	10,14,56,38,413	
BB-U-123-	.250 6.35	.209 5.31	.560 14.22	02,04,06,08	
BB-U-125-	.467 11.86	.388 9.86	.837 21.26	10,14,56	
BB-U-137-	.312 7.92	.285 7.24	.645 16.38	04,06,08,10 209	
	.342 8.69	.310 7.87	.696 17.68	04,06,08,10	
DIMENSIONAL TOLERANCES UNLESS OTHERWISE SPECIFIED					
FRAC.	DEC.	ANG.	SCALE:	NTS	DATE
±	±	±	DRAWN. BY: EMF	2-3-87	
			CHKD. BY:		
			APPRD. BY:		
TITLE: TEMP-TERM (1200°)					
RING TONGUE					
TERMINAL					
KRIMPITE					
100-SERIES					
DWG. NO.	A	CUSTOMER	DWG.		

ETC mox
 INCORPORATED