

SCHOTTKY RECTIFIER

1.1 Amp


Major Ratings and Characteristics

Characteristics	11DQ..	Units
$I_{F(AV)}$ Rectangular waveform	1.1	A
V_{RRM}	30/40	V
I_{FSM} @ $t_p=5\mu s$ sine	225	A
V_F @ 1 Apk, $T_J=25^\circ C$	0.55	V
T_J range	-40 to 150	$^\circ C$

Description/Features

The 11DQ.. axial leaded Schottky rectifier has been optimized for very low forward voltage drop, with moderate leakage. Typical applications are in switching power supplies, converters, free-wheeling diodes, and reverse battery protection.

- Low profile, axial leaded outline
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- Very low forward voltage drop
- High frequency operation
- Guard ring for enhanced ruggedness and long term reliability

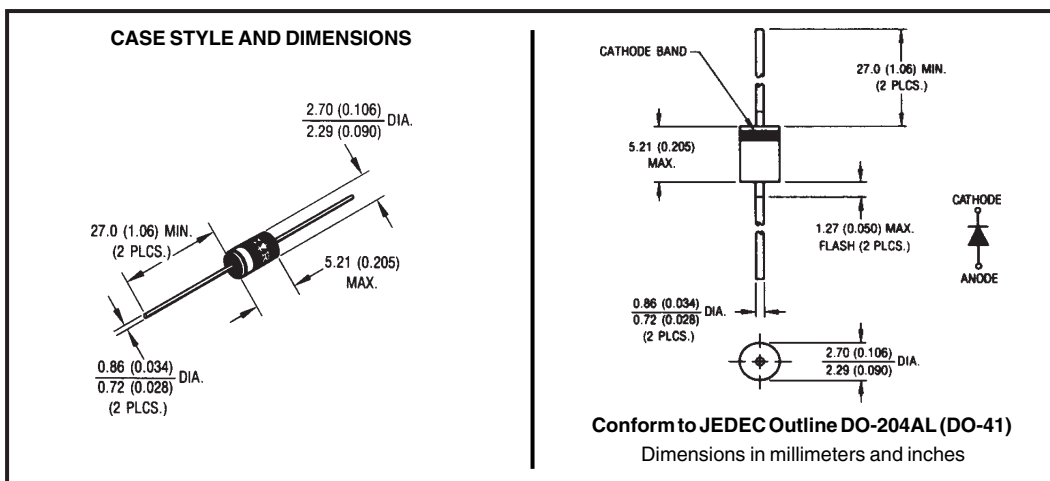

Voltage Ratings

Part number	11DQ03	11DQ04
V_R Max. DC Reverse Voltage (V)	30	40
V_{RWM} Max. Working Peak Reverse Voltage (V)		

Absolute Maximum Ratings

Parameters	11DQ..	Units	Conditions
$I_{F(AV)}$ Max. Average Forward Current * See Fig. 4	1.1	A	50% duty cycle @ $T_A=75^\circ\text{C}$, rectangular wave form
I_{FSM} Max. Peak One Cycle Non-Repetitive Surge Current * See Fig. 6	225	A	5 μs Sine or 3 μs Rect. pulse
	35		10ms Sine or 6ms Rect. pulse
			Following any rated load condition and with rated V_{RWM} applied

Electrical Specifications

Parameters	11DQ..	Units	Conditions
V_{FM} Max. Forward Voltage Drop * See Fig. 1 (1)	0.55	V	@ 1A
	0.71	V	@ 2A
	0.50	V	@ 1A
	0.61	V	@ 2A
I_{RM} Max. Reverse Leakage Current * See Fig. 2 (1)	1.0	mA	$T_J = 25^\circ\text{C}$
	6.0	mA	$T_J = 125^\circ\text{C}$
			$V_R = \text{rated } V_R$
C_T Typical Junction Capacitance	60	pF	$V_R = 5V_{DC}$, (test signal range 100Khz to 1Mhz) 25°C
L_S Typical Series Inductance	8.0	nH	Measured lead to lead 5mm from package body

(1) Pulse Width < 300 μs , Duty Cycle <2%

Thermal-Mechanical Specifications

Parameters	11DQ..	Units	Conditions
T_J Max. Junction Temperature Range	-40 to 150	$^\circ\text{C}$	
T_{stg} Max. Storage Temperature Range	-40 to 150	$^\circ\text{C}$	
R_{thJA} Max. Thermal Resistance Junction to Ambient	130	$^\circ\text{C/W}$	DC operation Without cooling fin
R_{thJA} Typical Thermal Resistance Junction to Ambient with PC Board Mounted	81	$^\circ\text{C/W}$	PC board mounted [L=8mm(0.315in.)] Solder land area 100mm ² (0.155in ² .)
wt Approximate Weight	0.33(0.012)	g(oz.)	
Case Style	DO-204AL(DO-41)		

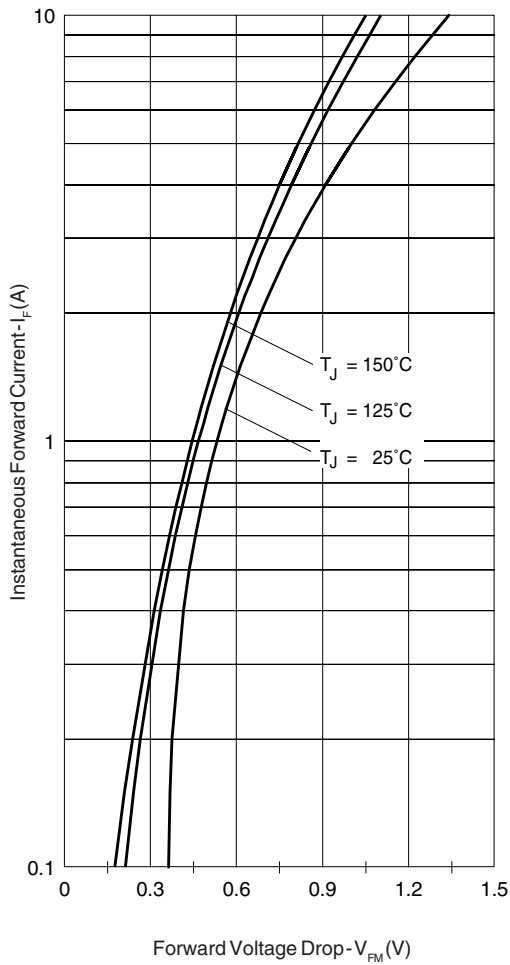


Fig. 1 - Max. Forward Voltage Drop Characteristics

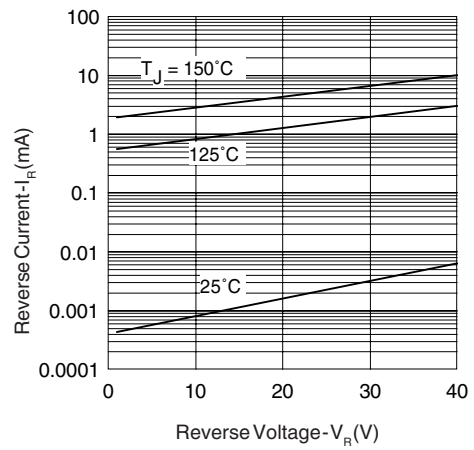


Fig. 2 - Typical Values Of Reverse Current Vs. Reverse Voltage

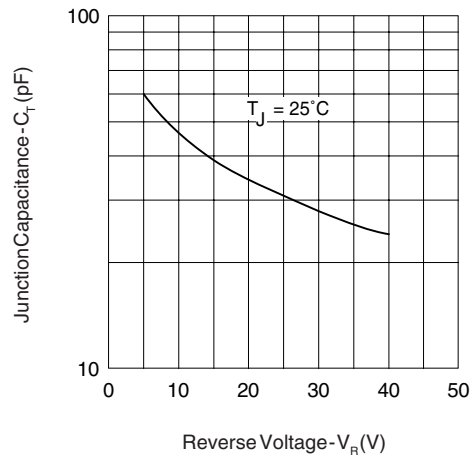


Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage

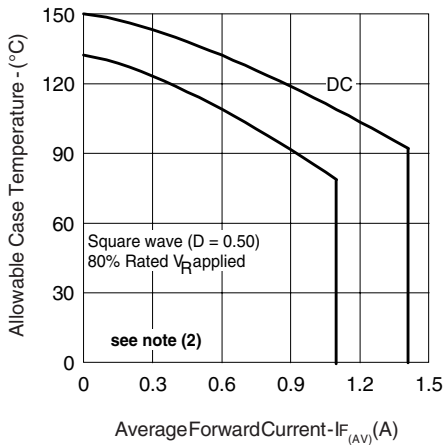


Fig. 4 - Max. Allowable Case Temperature Vs. Average Forward Current

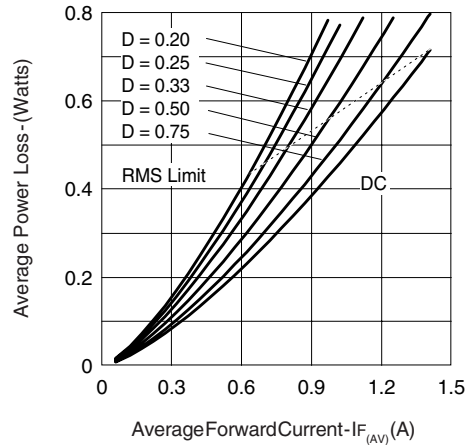


Fig. 5 - Forward Power Loss Characteristics

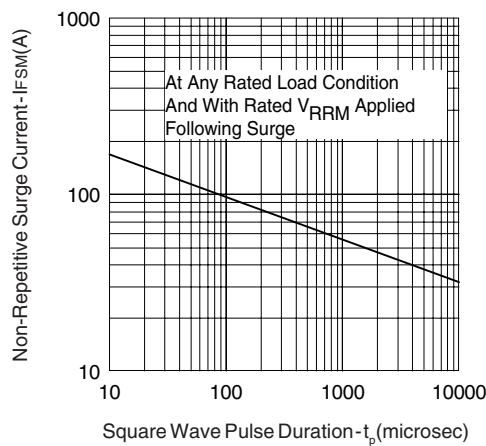


Fig. 6 - Max. Non-Repetitive Surge Current

(2) Formula used: $T_C = T_J - (Pd + Pd_{REV}) \times R_{thJC}$;
 $Pd = \text{Forward Power Loss} = I_{F(AV)} \times V_{FM} @ (I_{F(AV)} / D)$ (see Fig. 6);
 $Pd_{REV} = \text{Inverse Power Loss} = V_{R1} \times I_R (1 - D); I_R @ V_{R1} = 80\% \text{ rated } V_R$

WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245 U.S.A. Tel: (310) 322 3331. Fax: (310) 322 3332.
EUROPEAN HEADQUARTERS: Hurst Green, Oxted, Surrey RH8 9BB, U.K. Tel: ++ 44 1883 732020. Fax: ++ 44 1883 733408.
IR CANADA: 15 Lincoln Court, Brampton, Markham, Ontario L6T3Z2. Tel: (905) 453 2200. Fax: (905) 475 8801.
IR GERMANY: Saalburgstrasse 157, 61350 Bad Homburg. Tel: ++ 49 6172 96590. Fax: ++ 49 6172 965933.
IR ITALY: Via Liguria 49, 10071 Borgaro, Torino. Tel: ++ 39 11 45101111. Fax: ++ 39 11 45102220.
IR FAR EAST: K&H Bldg., 2F, 30-4 Nishi-Ikebukuro 3-Chome, Toshima-Ku, Tokyo, Japan 171. Tel: 81 3 3983 0086.
IR SOUTHEAST ASIA: 1 Kim Seng Promenade, Great World City West Tower, 13-11, Singapore 237994. Tel: ++ 65 838 4630.
IR TAIWAN: 16 Fl. Suite D.207, Sec. 2, Tun Haw South Road, Taipei, 10673, Taiwan. Tel: 886 2 2377 9936.