

# MTD-4024C

24" Multi-Touch 16:9 Full HD Projected Capacitive Display, optional IP65 Waterproof



## Features

- 24" LCD Display supports up to 16 : 9 Full HD 1920 x 1080 resolution
- High quality LCD Panel with high reliable LED Backlight
- Projected Capacitive 10-point Multi-Touch Screen
- 7H Hardness Anti-Scratch Surface
- Touchscreen works with gloves
- Supports VGA, DVI-D and HDMI Interface
- Landscape Mode and Portrait Mode supported
- Mounting : VESA Mount, Panel Mount
- IP65 Front Panel Protection (Optional)




## Specifications

Panel	
Panel Type	TFT LCD
Active Area	24" (16 : 9)
Max. Resolution	1920 x 1080 (Full HD)
Display Color	16.7M
Brightness (cd/m <sup>2</sup> )	250
Contrast Ratio	1000 : 1
Viewing Angle	170°/160° (H/V)
Backlight	LED Backlight
Backlight Life	30,000hrs
Touch Screen	
Touch Screen Type	10-point Projected Capacitive
Transparency	≥ 85%
Surface Hardness	7H Surface Hardness
Control Interface	USB Interface
System	
Power Input	DC-in 12V
Power Interface	DC Jack
Power Adapter	AC to DC 60W Power Adaptor
Video Interface	1 VGA, 1 DVI-D, 1 HDMI
OSD Control	5 OSD Keypad for Function Management
OSD Language	Multi Language
Mechanical	
Dimensions (W x H x L)	576.5mm x 369.7mm x 45.1mm (22.7" x 14.6" x 1.78")
Weight	8.6 kg (18.96 lb)
Front Panel Protection	IP65 Compliant (Optional)
Mounting	<ul style="list-style-type: none"> <li>▪ VESA Mount (75 x 75mm, 100 x 100mm)</li> <li>▪ Panel Mount</li> </ul>


Environment	
Operating Temperature	0°C to 50°C (32°F to 122°F)
Storage Temperature	-20°C to 60°C (-4°F to 140°F)
Humidity	5% to 90% Humidity, non-condensing
Shock	<ul style="list-style-type: none"> <li>▪ IEC 60068-2-27</li> <li>▪ 20G, Half-sine, 11ms</li> </ul>
Vibration	<ul style="list-style-type: none"> <li>▪ IEC 60068-2-64</li> <li>▪ Non-operation : 10Hz to 200Hz, 1.5Grms, X, Y, Z, 30 mins each Axis</li> </ul>
EMC	CE, FCC
Accessory List	
VGA Cable x1	
USB-A Cable (M) x1	

# Dimensions

Unit : mm/ inch

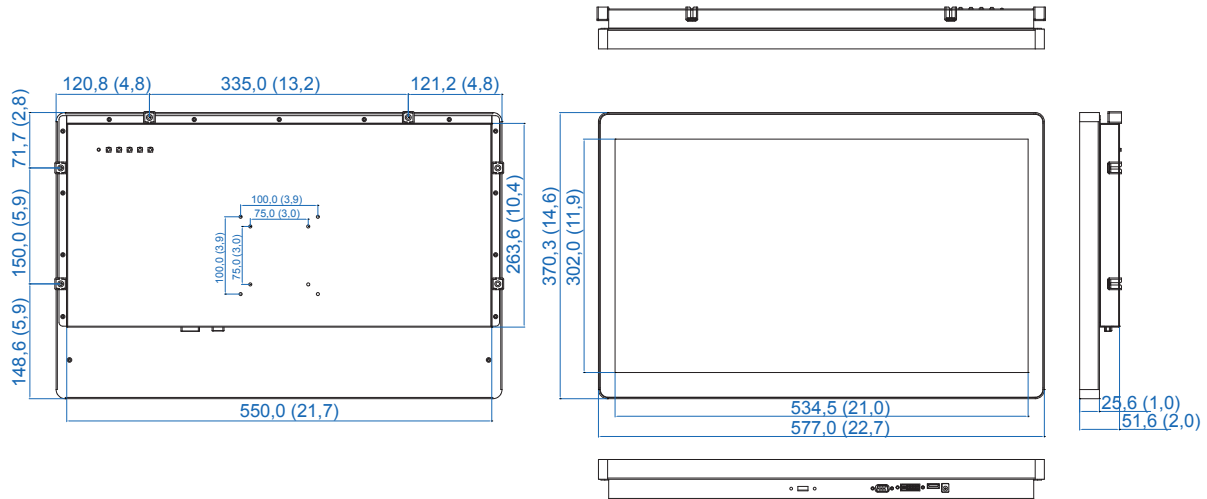

# I/O

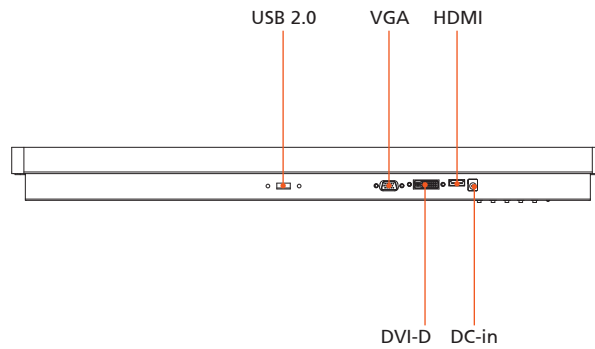

# Order Information

<b>MTD-4024C</b>	24" Multi-Touch 16:9 Full HD Projected Capacitive Display
<b>MTD-4024CP</b>	24" Multi-Touch 16:9 Full HD Projected Capacitive Display, IP65 Front Panel
<b>PWA-60W</b>	60W, 12V 100V AC to 240V AC Power Adapter for DC Jack
<b>Panel-Mount</b>	Panel Mount Kit
<b>VESA Stand</b>	VESA Table Stand
<b>CAB_DVI</b>	DVI Cable (M)
<b>CAB_HDMI</b>	HDMI Cable

1

High Performance Embedded System

2

Expandable Embedded System

3

Ultra Compact Embedded System

4

Multi-Touch Computer/ Display

5

Frame Grabber