


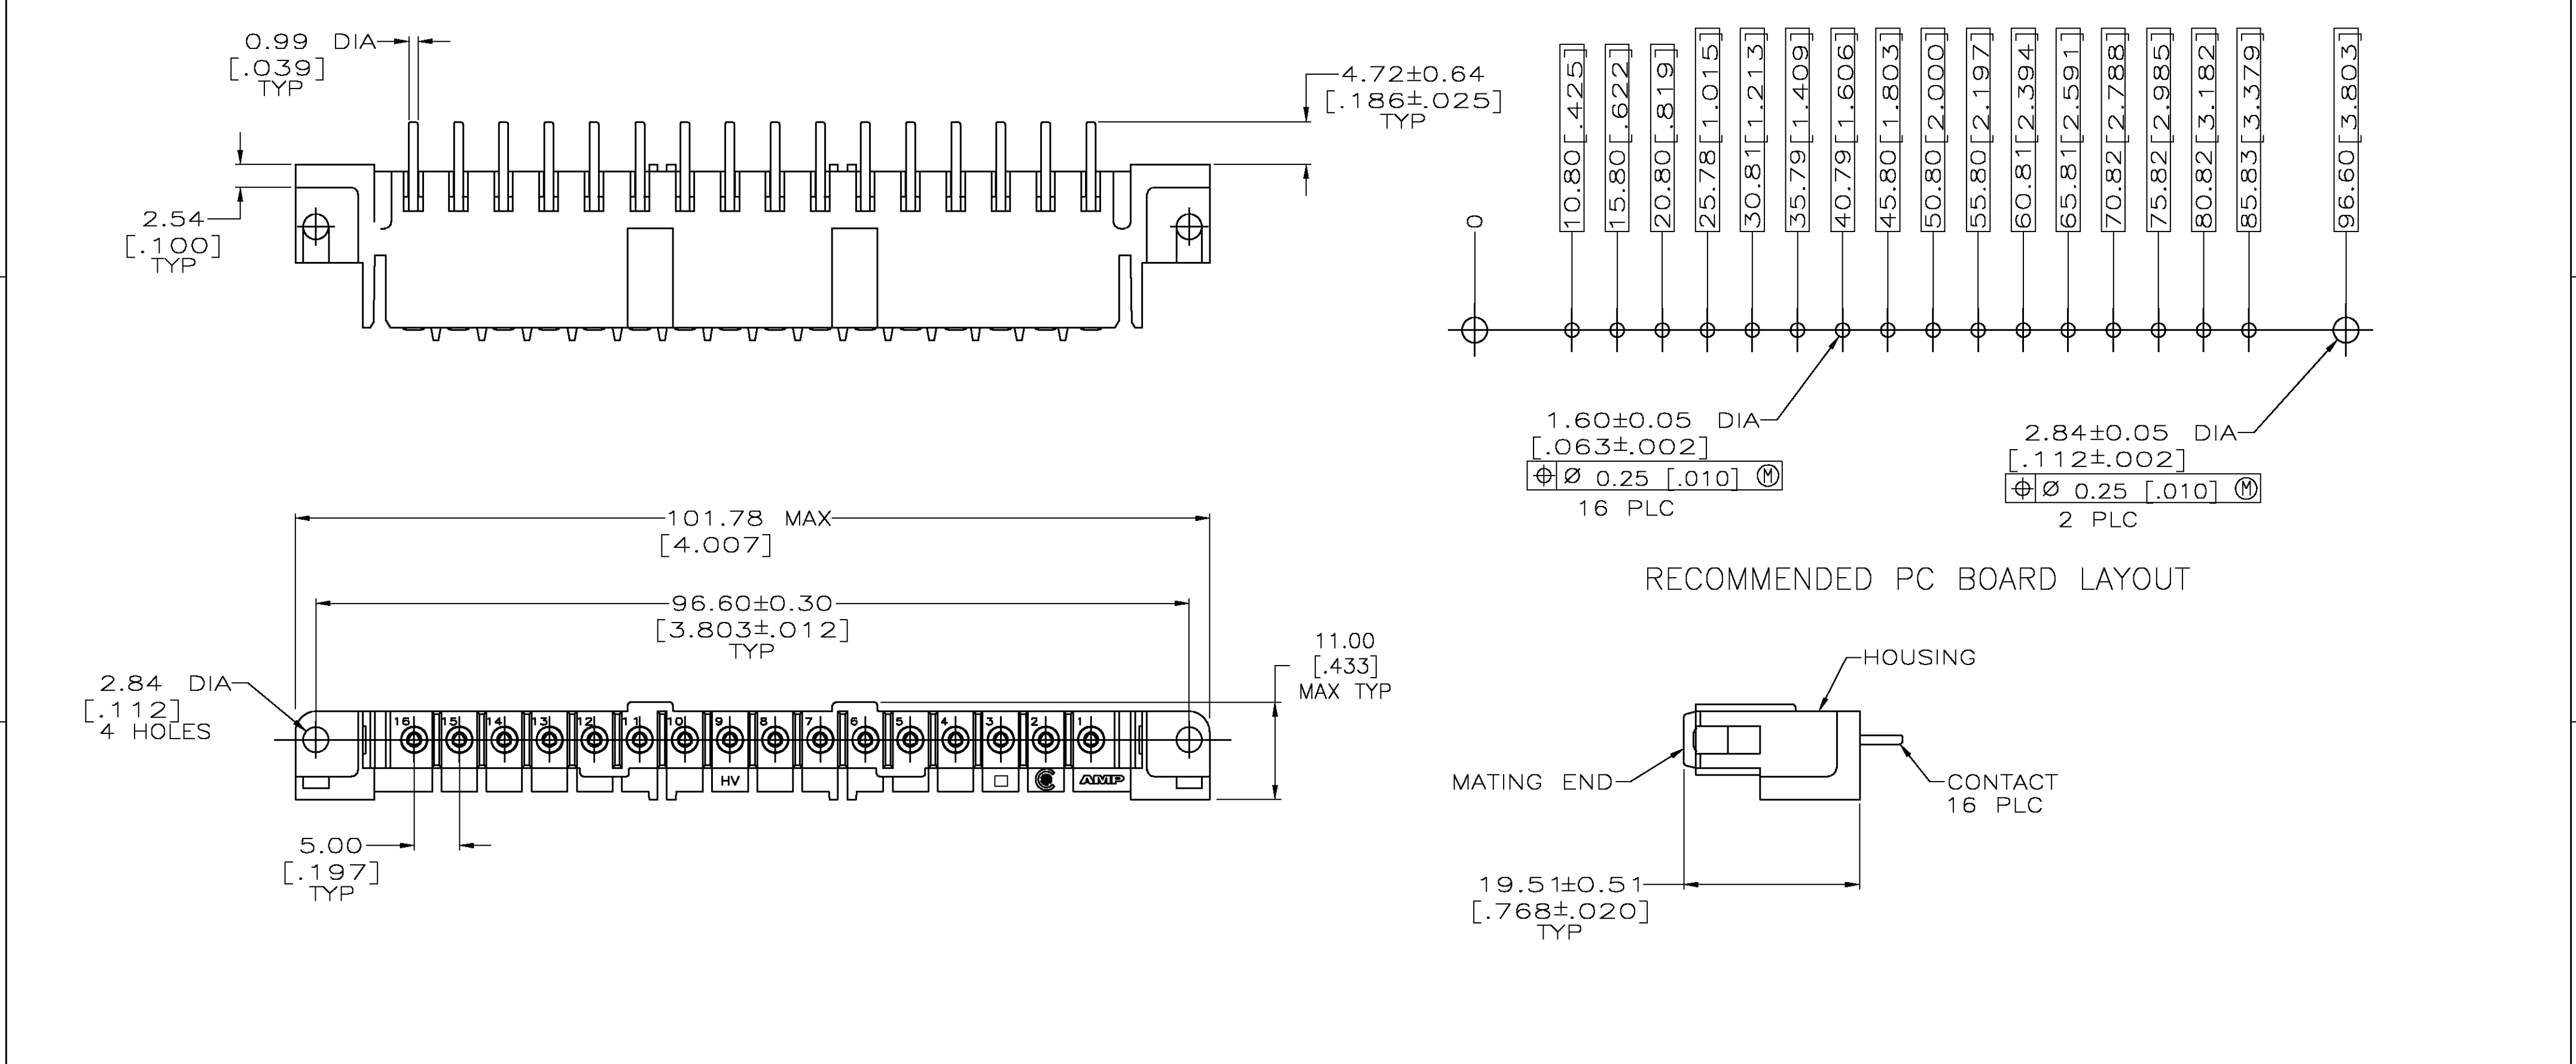

1. NYLON, RED.

2. PHOSPHOR BRONZE.

3. 3.81um [.000150] MIN TIN-LEAD OVER 1.27um [.000050] MIN NICKEL.

4. 0.76um [.000030] MIN GOLD FOR A LENGTH OF 5.08 [.200] MIN FROM MATING END, 3.81um [.000150] MIN TIN-LEAD FOR A LENGTH OF 5.36 [.211] MIN FROM OPPOSITE END, BOTH OVER 1.27um [.000050] MIN NICKEL.

5. 3.81um [.000150] MIN TIN OVER 1.27um [.000050] MIN NICKEL.

6. 0.76um [.000030] MIN GOLD FOR A LENGTH OF 5.08 [.200] MIN FROM MATING END, 3.81um [.000150] MIN TIN FOR A LENGTH OF 5.36 [.211] MIN FROM OPPOSITE END, BOTH OVER 1.27um [.000050] MIN NICKEL.

6	207615-7
5	207615-6
4	207615-3
3	207615-1
CONTACT FINISH	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN L.SIPE 08/07/92	Tyco Electronics Corporation Harrisburg, Pa 17105-3608	
DIMENSIONS: mm [INCHES]		CHK R.STONE 8-25-92	NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD -	PRODUCT SPEC	
0 PLC ± -		APPLICATION SPEC		
1 PLC ± -		-		
2 PLC ± 0.25 [.010]		-		
3 PLC ± -		-		
4 PLC ± -		-		
ANGLES ± -		-		
FINISH		WEIGHT -	SIZE A2	
HOUSING: 1		CONTACTS: SEE TABLE		CAGE CODE 00779
CUSTOMER DRAWING		SCALE 2:1		DRAWING NO C=207615
		SHEET 1 OF 1		RESTRICTED TO -
				REV H