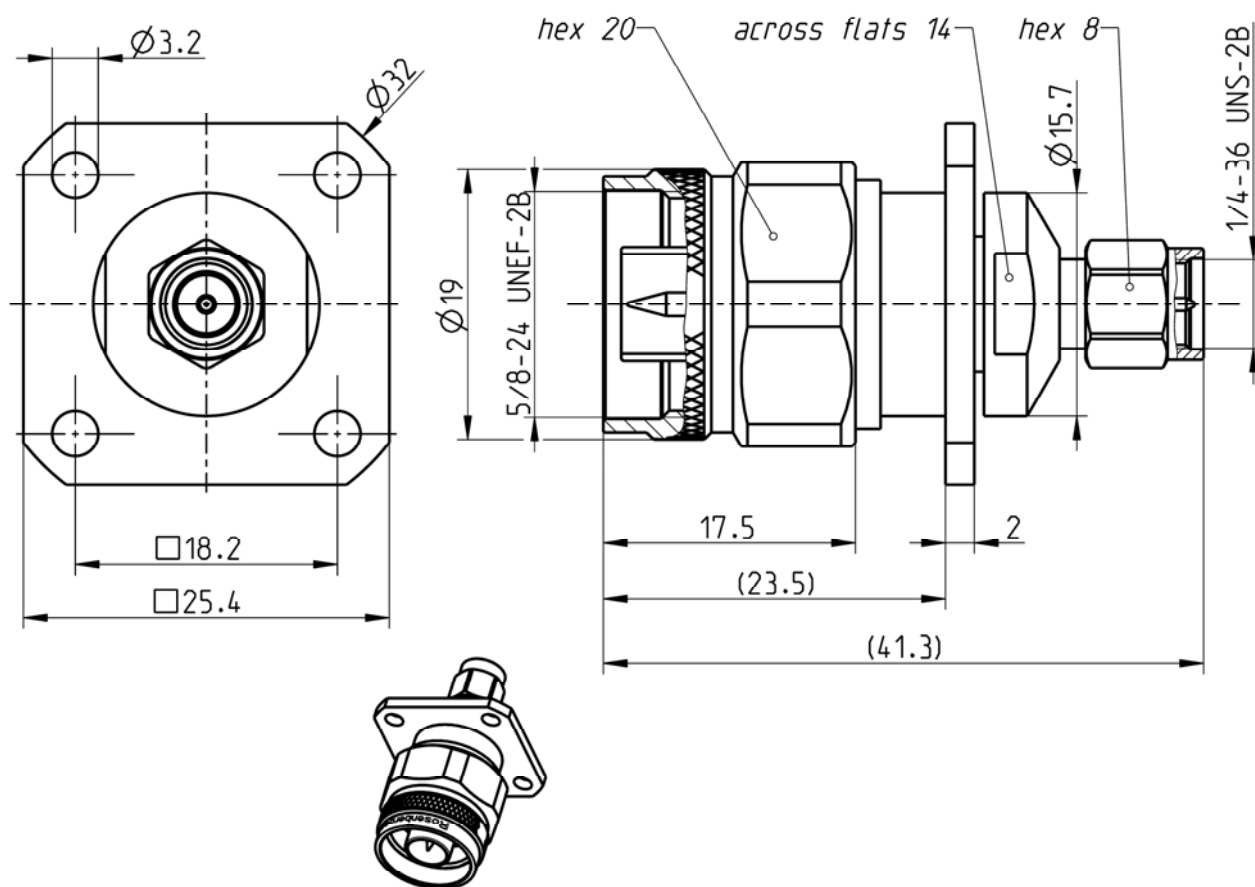


ADAPTOR  
RPC-N 50 Ω PLUG – SMA PLUG**05S432-S00S3**

All dimensions are in mm; tolerances according to ISO 2768 m-H

**Interface**

RPC-N according to  
SMA according to  
SMA mechanically compatible with

IEC 60169-16 ; CECC 22 210 ; MIL-STD 348A/402  
IEC 60169-15; EN 122110; MIL-STD 348A/310  
RPC-2.92 and RPC-3.50

**Documents**

Panel piercing

B 12

**Material and plating****Connector parts**

Center contact  
Outer contact  
Coupling nut  
Dielectric 1  
Dielectric 2

**Material**

Beryllium copper  
Stainless steel  
Stainless steel  
PPE  
PTFE

**Plating**

Gold, min. 1.27  $\mu$ m, over chemical nickel  
Passivated  
Passivated

# TECHNICAL DATA SHEET

**Rosenberger®**

ADAPTOR  
RPC-N 50 Ω PLUG – SMA PLUG

**05S432-S00S3**

## Electrical data

|                                 |                                   |
|---------------------------------|-----------------------------------|
| Impedance                       | 50 Ω                              |
| Frequency                       | DC to 18 GHz                      |
| Return loss                     | ≥ 23 dB, DC to 18 GHz             |
| Insertion loss                  | ≤ 0.1 x $\sqrt{f(\text{GHz})}$ dB |
| Insulation resistance           | ≥ 5 GΩ                            |
| Center contact resistance RPC-N | ≤ 1.0 mΩ                          |
| Outer contact resistance RPC-N  | ≤ 1.0 mΩ                          |
| Center contact resistance SMA   | ≤ 3.0 mΩ                          |
| Outer contact resistance SMA    | ≤ 2.0 mΩ                          |
| Test voltage                    | 1000 V rms                        |
| Working voltage                 | 480 V rms                         |
| RF-leakage                      | ≥ 90 dB up to 1 GHz               |

## Mechanical data

|                            |                    |
|----------------------------|--------------------|
| Mating cycles              | ≥ 500              |
| Center contact captivation | ≥ 28 N             |
| Coupling test torque RPC-N | 1.70 Nm            |
| Recommended torque RPC-N   | 0.70 Nm to 1.10 Nm |
| Coupling test torque SMA   | 1.70 Nm            |
| Recommended torque SMA     | 0.80 Nm to 1.10 Nm |

## Environmental data

|                     |                                |
|---------------------|--------------------------------|
| Temperature range   | -40°C to +85°C                 |
| Thermal shock       | IEC 61169-1, Subclause 9.4.4   |
| Corrosion           | IEC 61169-1, Subclause 9.4.6-p |
| Vibration           | IEC 61169-1, Subclause 9.3.3   |
| Shock               | IEC 61169-1, Subclause 9.3.14  |
| Moisture resistance | IEC 61169-1, Subclause 9.4.3   |
| 2002/95/EC (RoHS)   | compliant                      |

## Tooling

N/A

## Suitable cables

N/A

## Packing

|          |              |
|----------|--------------|
| Standard | 1 pce in box |
| Weight   | 51 g/pce     |

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

| Draft                                                                                                                                                  | Date     | Approved    | Date     | Rev.                                                                                                               | Engineering change number | Name     | Date          |
|--------------------------------------------------------------------------------------------------------------------------------------------------------|----------|-------------|----------|--------------------------------------------------------------------------------------------------------------------|---------------------------|----------|---------------|
| Herbert Babinger                                                                                                                                       | 11/10/06 | H. Babinger | 08.02.07 | b00                                                                                                                | 07-0101                   | B. Dandl | 08.02.07      |
| Rosenberger Hochfrequenztechnik GmbH & Co. KG<br>P.O.Box 1260 D-84526 Tittmoning Germany<br><a href="http://www.rosenberger.de">www.rosenberger.de</a> |          |             |          | Tel.: +49 8684 18-0<br>Fax: +49 8684 18-499<br>email: <a href="mailto:info@rosenberger.de">info@rosenberger.de</a> |                           |          | Page<br>2 / 2 |