


# SPECIFICATION FOR APPROVAL

REF : 20091110-B




PAGE: 1

PROD. NAME	SMD POWER INDUCTOR	ABC'S DWG NO.	SB1005□□□□L□-□□□
		ABC'S ITEM NO.	


## I . CONFIGURATION & DIMENSIONS :

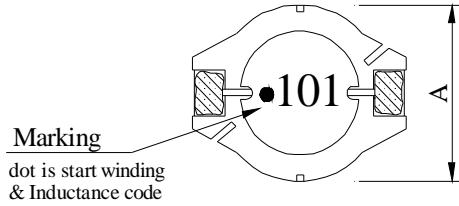

- A : 10.0±0.3 m/m
- B : 12.7±0.3 m/m
- C : 5.0±0.3 m/m
- D : 2.4±0.2 m/m
- E : 2.2 ref. m/m
- F : 7.6±0.3 m/m
- G : 7.3 ref. m/m
- H : 2.8 ref. m/m
- I : 3.0 ref. m/m




## II . SCHEMATIC DIAGRAM :




## III . MATERIALS :

- a . Core : Ferrite DR core
- b . Wire : Enamelled copper wire ( class F )
- c . Base : DAP Base
- d . Terminal : Cu/Ni/Sn
- e . Adhesive : Epoxy resin
- f . Solder wire : Sn97/Cu3 Alloys
- g . Remark : Products comply with RoHS' requirements

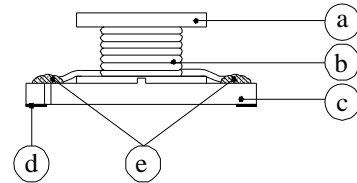

Peak Temp : 260°C max.  
 Max time above 230°C : 50sec max.  
 Max time above 200°C : 70sec max.

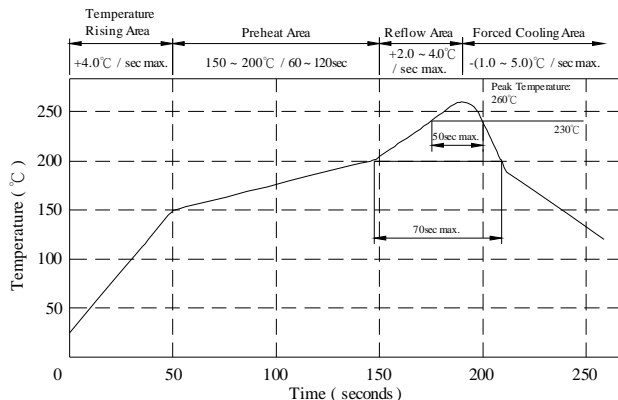

## IV . GENERAL SPECIFICATION :

- a . Temp. rise : 15°C typ.
- b . Storage temp. : -40°C ~ +125°C
- c . Operating temp. : -40°C ~ +105°C
- d . Resistance to solder heat : 260°C. 10 secs.

AR-001A

# SPECIFICATION FOR APPROVAL

REF : 20091110-B

PAGE: 2

PROD. NAME	SMD POWER INDUCTOR	ABC'S DWG NO.	SB1005□□□□L□-□□□
		ABC'S ITEM NO.	

## V . ELECTRICAL CHARACTERISTICS :

DWG No.	Inductance (uH) 0.1 V / 100 KHz	RDC (Ω) max.	SRF (MHz) typ.	I <sub>rms</sub> (A) typ.	I <sub>sat</sub> (A) max.
SB10051R0ML□ -□□□	1.0±20%	0.007	130.0	7.50	9.00
SB10051R5ML□ -□□□	1.5±20%	0.009	90.0	6.50	8.00
SB10052R5ML□ -□□□	2.5±20%	0.012	65.0	5.50	7.00
SB10053R3ML□ -□□□	3.3±20%	0.015	50.0	5.00	6.40
SB10054R7ML□ -□□□	4.7±20%	0.019	45.0	4.50	5.40
SB10056R8ML□ -□□□	6.8±20%	0.034	35.0	3.40	4.50
SB1005100ML□ -□□□	10.0±20%	0.045	25.0	2.90	3.70
SB1005150ML□ -□□□	15.0±20%	0.060	23.0	2.50	3.00
SB1005220ML□ -□□□	22.0±20%	0.095	18.0	2.00	2.50
SB1005330KL□ -□□□	33.0±10%	0.120	15.0	1.80	2.00
SB1005470KL□ -□□□	47.0±10%	0.190	12.0	1.40	1.60
SB1005680KL□ -□□□	68.0±10%	0.240	10.0	1.20	1.40
SB1005101KL□ -□□□	100.0±10%	0.330	8.0	1.00	1.20
SB1005151KL□ -□□□	150.0±10%	0.590	6.0	0.80	1.00
SB1005221KL□ -□□□	220.0±10%	0.780	5.0	0.70	0.80
SB1005331KL□ -□□□	330.0±10%	1.150	4.0	0.55	0.60
SB1005471KL□ -□□□	470.0±10%	1.700	3.5	0.45	0.50
SB1005681KL□ -□□□	680.0±10%	2.600	3.0	0.35	0.40
SB1005102KL□ -□□□	1000.0±10%	3.900	2.0	0.30	0.30
SB1005152KL□ -□□□	1500.0±10%	6.300	1.9	0.25	0.25
SB1005222KL□ -□□□	2200.0±10%	8.200	1.6	0.20	0.20
SB1005332KL□ -□□□	3300.0±10%	14.000	1.2	0.16	0.17
SB1005472KL□ -□□□	4700.0±10%	17.000	1.1	0.15	0.15
SB1005682KL□ -□□□	6800.0±10%	30.000	0.9	0.11	0.12
SB1005103KL□ -□□□	10000.0±10%	39.000	0.7	0.10	0.10

- 1). □ : Packaging information ... [A] : Bulk [B] : Taping Reel  
 2). "- □□□ " : Reference code

AR-001A




# SPECIFICATION FOR APPROVAL

REF: 20091110-B

PAGE: 3

PROD. NAME	SMD POWER INDUCTOR	ABC'S DWG NO.	SB1005□□□□L□-□□□
		ABC'S ITEM NO.	

## VI . INDUCTANCE VS. DC CURRENT CURVE :

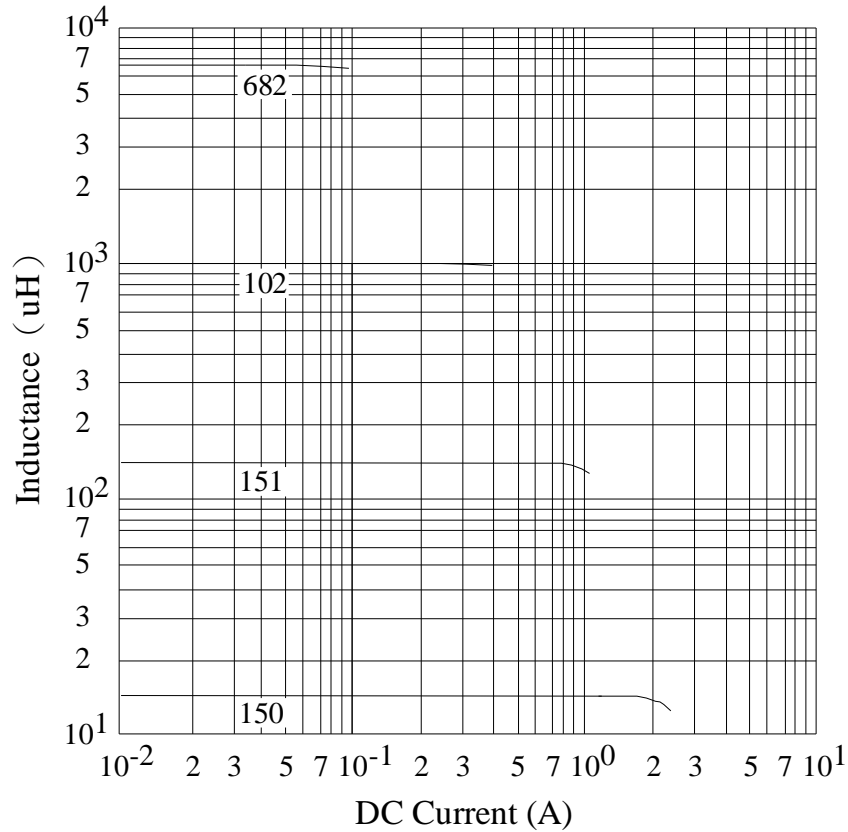

AR-001A

# SPECIFICATION FOR APPROVAL



REF : 20091110-B

PAGE: 4

PROD. NAME	SMD POWER INDUCTOR	ABC'S DWG NO.	SB1005□□□□L□-□□□
		ABC'S ITEM NO.	

## VII . PACKAGING INFORMATION :

### 1. Configuration :

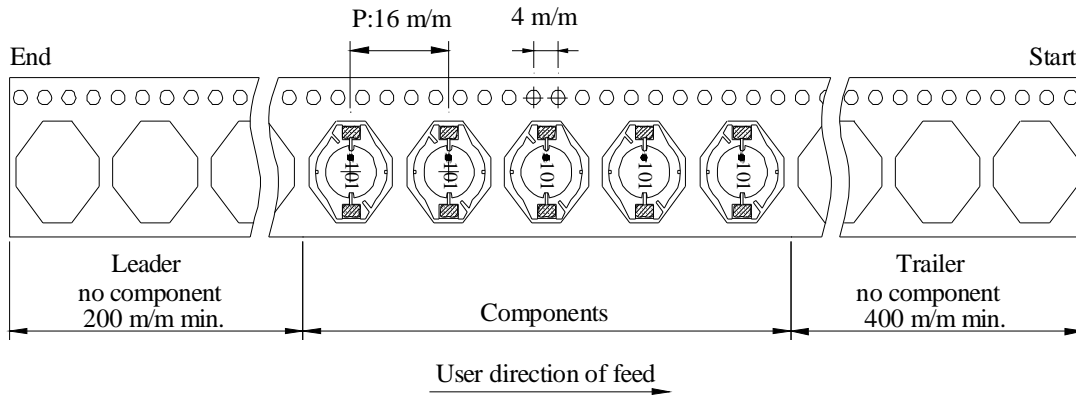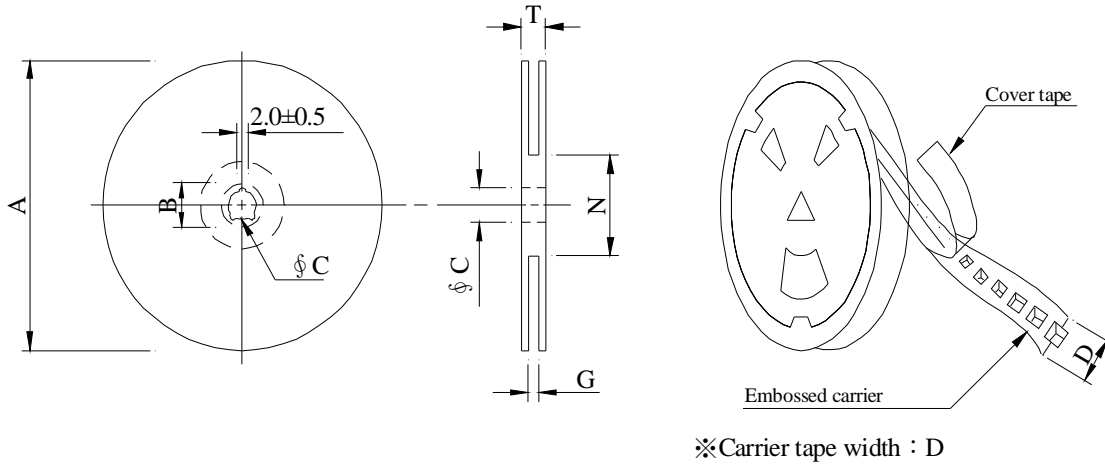

### 2. Dimensions : (m/m)

Style	A	B	C	D	G	N	T
13 - 24	330	21±0.8	13±0.5	24	26 <sup>+0</sup>	50 <sup>-0</sup>	30.4

### 3. QTY & G.W. Per package :

Series	Inner : Reel			Outer : Carton		
	QTY (pcs)	G.W. (gw)	Style	QTY (pcs)	G.W. (kg)	Size (cm)
SB1005	600	1100	13 - 24	2400	6.6	40 x 40 x 24
SB1005	500	920	13 - 24	2000	6.0	40 x 40 x 24

AR-001A


# SPECIFICATION FOR APPROVAL

REF : 20091110-B

PAGE: 5

PROD. NAME	SMD POWER INDUCTOR	ABC'S DWG NO.	SB1005□□□□L□-□□□
		ABC'S ITEM NO.	

**VIII . DWGING NUMBER EXPRESSION :**

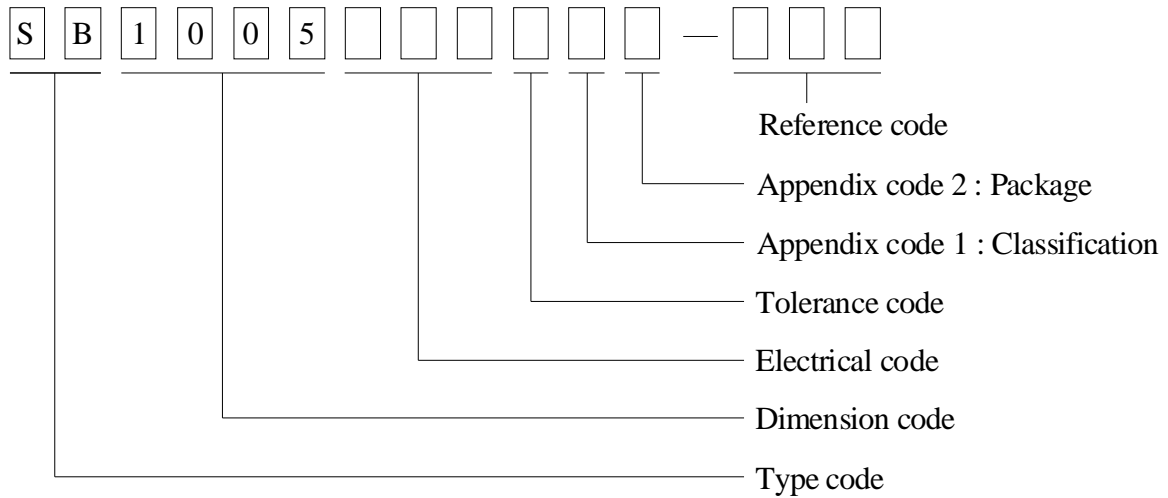

**Appendix code 1 : Product Classification**

L : Lead Free Standard products comply with RoHS' requirements

1 ~ 9 : Lead Free Special products comply with RoHS' requirements

**Appendix code 2 : Package Information**

Code	Inner package	Inner package Q'TY	Remark
A	T.B.D.	T.B.D.	
B	T / R ( Reel package )	600 pcs	
C	T / R ( Reel package )	500 pcs	

# SPECIFICATION FOR APPROVAL

REF : 20091110-B

PAGE: 6

PROD. NAME	SMD POWER INDUCTOR	ABC'S DWG NO.	SB1005□□□□L□-□□□
		ABC'S ITEM NO.	

**IX . RELIABILITY TEST :**

Test item	Specification	Test condition						
Solderability	More than 95% of the terminal electrode shall be covered With fresh solder.	Preheat : 155°C / 4 hours. Solder : Sn96.5 / Ag3 / Cu0.5 or equivalent Solder temp. : 235±5°C Flux : Rosin Dip time : 5±0.5 seconds						
Thermal shock test ( Temp. cycle )	Electrical oharacteristics shall not change more than ±20%	<table style="width: 100%; border: none;"> <tr> <td style="text-align: center;">Room temp. 15 minutes</td> <td style="text-align: center; vertical-align: middle;">→</td> <td style="text-align: center;">-40 °C 30 minutes</td> </tr> <tr> <td style="text-align: center;">Room temp. 15 minutes</td> <td style="text-align: center; vertical-align: middle;">→</td> <td style="text-align: center;">+105 °C 30 minutes</td> </tr> </table> <p>Total : 50 cycles</p>	Room temp. 15 minutes	→	-40 °C 30 minutes	Room temp. 15 minutes	→	+105 °C 30 minutes
Room temp. 15 minutes	→	-40 °C 30 minutes						
Room temp. 15 minutes	→	+105 °C 30 minutes						
Humidity Test		Temperature : 40±2°C Humidity : 90±5% Time : 1000 hours						
High temp. Resistance test		Temperature : 105±5°C Applied current : Per spec. Time : 96 hours						

AR-001A



# SPECIFICATION FOR APPROVAL

REF : 20091110-B

PAGE: 7

PROD. NAME	SMD POWER INDUCTOR	ABC'S DWG NO.	SB1005□□□□L□-□□□
		ABC'S ITEM NO.	

X . UL CARD :

OBMW2 September 8, 2000

Magnet Wire-Component

JUNG SHING WIRE CO LTD E174837

231 CHUNG CHENG RD, SEC 3 JEN-TEH HSIANG, TAINAN  
HSIEN TAIWAN

Mtl Dsg	Mark Dsg	BC	Coat Typ	OC	ANSI Type	Temp Class
AIW	---	Polyamideimide		---	MW81-C	220
CFUEWB	---	Polyurethane		---	MW75C	130
EIAIW	---	Polyesterimide		Polyamideimide	MW35C	200
EILOCKY	---	Polyesterimide		Polyamide	---	180
EILOCKW	---	Polyesterimide		Modified Epoxy	---	200
EIW	---	Polyesterimide		---	---	220
EIW-2	---	Polyesterimide		---	MW74-C	200
FL.EILOCKY	---	Modified Polyester		Polyamide	---	155
LSFFW	---	Polyurethane		---	MW79-C	155
LSUEW	---	Polyurethane		---	---	130
PEW	---	Polyester		---	---	155
PEY	---	Polyester		Nylon	MW24-C	155
SF.FLW	---	Modified Polyester		---	MW26C	155
SF.EIW	---	Polyesterimide		---	MW77C	180
SF.BY@	---	Modified Polyester		Nylon	MW27-C	155
SF.FLY@	---	Modified Polyester		Nylon	MW27-C	155
SF.BLOCKBS	---	Modified Polyester		Modified Polyamide	---	155
SF.EILOCKY#	---	Polyesterimide		Polyamide	---	180
SF.EILOCKBS	---	Polyesterimide		Modified Polyamide	---	180
SF.BW@	---	Modified Polyester		---	MW26C	155
SFFW	---	Polyurethane		---	MW79	155

287806002 Page 1 of 2

A not-for-profit organization dedicated to public safety and committed to quality service

Mtl Dsg	Mark Dsg	BC	Coat Typ	OC	ANSI Type	Temp Class
SFFY	---	Polyurethane		Polyamide	MW80C	155
UEW-1	---	Polyurethane		---	MW2-C	105
UEW-2	---	Polyurethane		---	---	130
UEW-4	---	Polyurethane		---	MW75C	130
UEY	---	Polyurethane		Nylon	MW28-C	130
UEY-2	---	Polyurethane		Polyamide	MW28-C	130

@ - May be suffixed by LZ; # - May be suffixed by LZ, EL or LZL.  
LZ - Signifies magened wires twisted together; EL - signifies base coated magnet wire laid parallel with top coat applied overall; LZL - signifies base coated magnet wire twisted together and covered with top coat overall.

Marking: Company name or trademarks **JSW** or 榮星電線 , material designation or marked designation on packaed or reel, and Recognized Component Mark.

See General Information Preceding These Recognitions  
For use only in equipment where the acceptability of the combination is determined by Underwriters Laboratories Inc.

287806002 Page 2 of 2

OBMW2E174837  
September 8, 2000

AR-001A



# SPECIFICATION FOR APPROVAL

REF : 20091110-B

PAGE: 8

PROD. NAME	SMD POWER INDUCTOR	ABC'S DWG NO.	SB1005□□□□L□-□□□
		ABC'S ITEM NO.	

		SUMITOMO CHEMICAL CO LTD						E54705 (M)				
		5-33 KITAHAMA 4-CHOME CHUO-KO, OSAKA JAPAN										
Mtl Dsg	Col	Min Thk mm	UL94 Flame Class	Elec	RTI			H W I	H A I	H V T R	D 4 9 5	C T I
					with Imp	Mech w/o Imp						
Liquid crystal polyester (LCP), designated "EKONOL" or "SUMIKASUPER", furnished in the form of pellets, (Contd)												
E4008 , E400X	NC , BK	0.30	94V-0	130	130	130	—	—	—	—	—	—
		0.75	94V-0	130	130	130	3	4	—	—	—	—
		1.5	94V-0	130	130	130	2	4	—	—	—	—
		3.0	94V-0	130	130	130	1	4	0	5	4	—
E4008	NC , WT , BK	0.30	94V-0	130	130	130	—	—	—	—	—	—
		0.75	94V-0	220	180	220	3	4	—	—	—	—
		1.5	94V-0	220	200	240	2	4	—	—	—	—
		3.0	94V-0	220	200	240	1	4	0	5	4	—
E4010	NC , BK	0.30	94V-0	130	130	130	—	—	—	—	—	—
		0.75	94V-0	220	180	220	3	4	—	—	—	—
		1.5	94V-0	220	200	240	2	4	—	—	—	—
		3.0	94V-0	220	200	240	1	4	0	5	4	—
E400(Y)L , E4008L	NC , BK	0.30	94V-0	130	130	130	—	—	—	—	—	—
		0.75	94V-0	130	130	130	3	4	—	—	—	—
		1.5	94V-0	130	130	130	2	4	—	—	—	—
		3.0	94V-0	130	130	130	1	4	0	5	4	—
E4810	NC , BK	0.30	94V-0	130	130	130	—	—	—	—	—	—
		0.75	94V-0	130	130	130	0	4	—	—	—	—
		1.5	94V-0	130	130	130	0	4	—	—	—	—
		3.0	94V-0	130	130	130	1	4	0	5	4	—

(X) Denotes any number 1 thru 9.  
 (Y) Denotes any number 1 thru 7.

AR-001A

