Crimp contact - SF-10KP320 - 1615961

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (http://phoenixcontact.com/download)



Crimp contact, rolled, Taped articles, number of pieces per reel: 2500, contact diameter: 1 mm, crimp range: 0.06 mm² ... 0.25 mm²

Your advantages

- Crimping connection: vibration- and temperature-resistant assembly
- High tensile strength of the connection
- Low contact resistance
- Easy production monitoring
- Variable production run startup, thanks to full or semi-automation

Key Commercial Data

Packing unit	1 pc
GTIN	4 046356 707688
GTIN	4046356707688

Technical data


Environmental Product Compliance

China RoHS	Environmentally Friendly Use Period = 50 years
	For details about hazardous substances go to tab “Downloads”, Category “Manufacturer's declaration”

Drawings

Crimp contact - SF-10KP320 - 1615961

Dimensional drawing

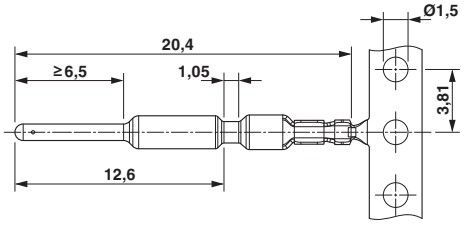

Classifications

eCl@ss

eCl@ss 4.0	272607xx
eCl@ss 4.1	27260701
eCl@ss 5.0	27260701
eCl@ss 5.1	27261200
eCl@ss 6.0	27261200
eCl@ss 7.0	27440204
eCl@ss 9.0	27440204

ETIM

ETIM 3.0	EC001121
ETIM 4.0	EC000796
ETIM 6.0	EC000796

UNSPSC

UNSPSC 6.01	43172015
UNSPSC 7.0901	43201404
UNSPSC 11	43172015
UNSPSC 12.01	43201404
UNSPSC 13.2	39121522
UNSPSC 19.0	39121522

Accessories

Accessories

Crimping tool

Crimping pliers - SF-Z0029 - 1607458



Crimping pliers

Crimp contact - SF-10KP320 - 1615961

Accessories

Electrical crimping tool - SF-Z0032 - 1607462



Electrical crimp device for punched-rolled C-HC crimp contacts

Phoenix Contact 2021 © - all rights reserved
http://www.phoenixcontact.com

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
http://www.phoenixcontact.com