

Rev	AWO #	Description	Date	Appr
-		RELEASED	6/08/10	

6

5

4






3

2

1

APPROVED: _____

DATE: _____ TITLE: _____

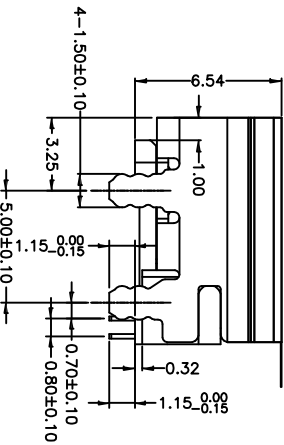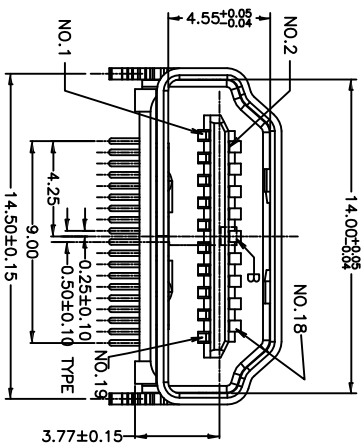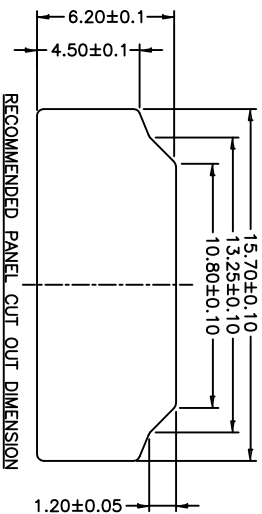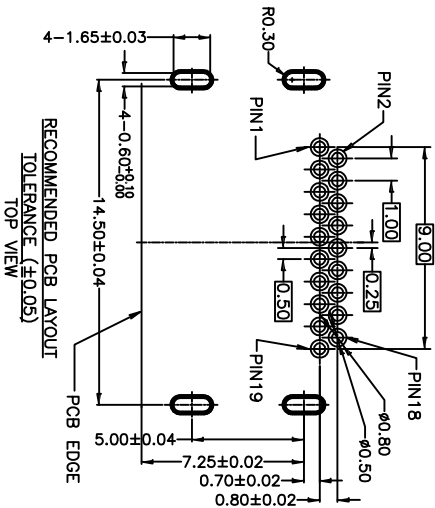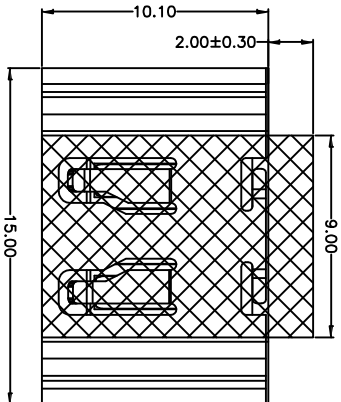

SPECIFICATIONS:

- Material: Housing: Hi-temp thermoplastic, UL 94V-0
- Housing color: Black
- Contact: Copper Alloy
- Shield: Copper Alloy, Nickel plated
- Plating: 3u" Gold over Nickel underplate on contact area, Tin over Copper underplate on tails.
- Electrical: Voltage rating: 40V
- Current rating: 0.5A
- Dielectric strength: 300VAC for 1 minute min.
- Contact resistance: 100 Megohm min.
- Insulation resistance: 10 mohms max.
- Environmental: Lead free, RoHS Compliant
- Recommended soldering temp: 260°C for 5 seconds.

PACKAGED ON TAPE & REEL

A

A

B

B

C

C

D

D

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: HDMI CONNECTOR, RIGHT ANGLE
 DIP TYPE, 2 ROWS

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM		INCHES		HOLDERS	
.X	± .10	ØX	± .10		
.XX	± .020	ØXX	± .015		
.XXX	± .015	ØXXX	± .010		
APPROVALS		DATE		TITLE	
DRAWN	DY	6/08/10		HDMI-S-RA-1-RF-03-KT-T/R	
CHECKED				PART NO. X	
APPROVED				REF: S00015C	
		SCALE: NTS		SHEET 1 OF 1	

6

5

4

3

2

1

