

isc Silicon NPN Darlington Power Transistor

PMD12K80

DESCRIPTION

- High DC current gain
- Collector-Emitter Breakdown Voltage-
 $V_{(BR)CEO} = 80V(\text{Min})$
- Complement to type PMD13K80

APPLICATIONS



- Designed for general purpose amplifier and DC motor control applications.

ABSOLUTE MAXIMUM RATINGS($T_C=25^\circ\text{C}$)

SYMBOL	PARAMETER	VALUE	UNIT
V_{CBO}	Collector-Base Voltage	80	V
V_{CEO}	Collector-Emitter Voltage	80	V
V_{EBO}	Emitter-Base Voltage	5.0	V
I_C	Collector Current -Continuous	8	A
I_{CP}	Collector Current-Peak	16	A
I_B	Base Current	0.12	A
P_C	Collector Power Dissipation@ $T_C=50^\circ\text{C}$	100	W
T_j	Junction Temperature	150	$^\circ\text{C}$
T_{stg}	Storage Temperature	-65~200	$^\circ\text{C}$

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
$R_{th\ j-c}$	ThermalResistance, Junction to Case	1.5	$^\circ\text{C/W}$

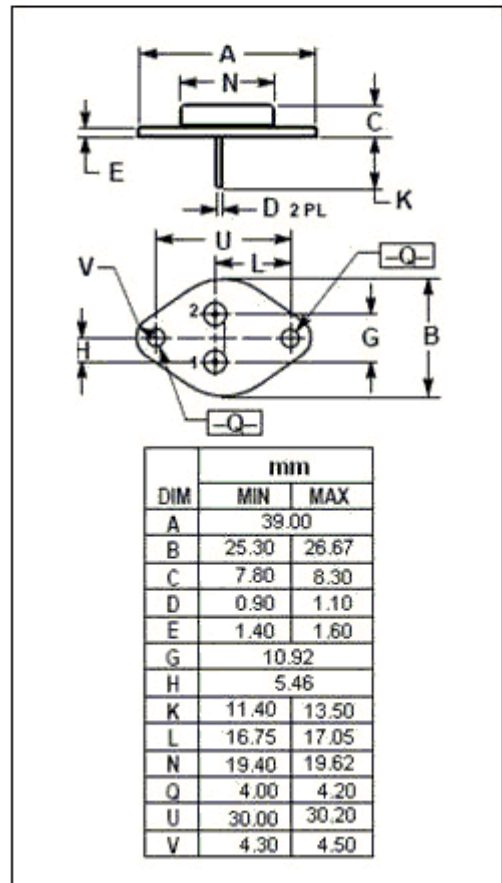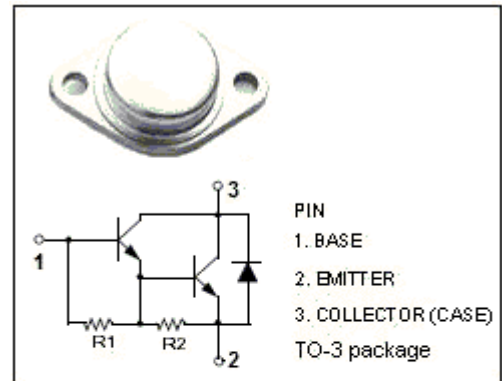

isc Silicon NPN Darlington Power Transistor**PMD12K80****ELECTRICAL CHARACTERISTICS** $T_C=25^{\circ}\text{C}$ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	MAX	UNIT
$V_{(BR)CEO}$	Collector-Emitter Breakdown Voltage	$I_C= 100\text{mA}; I_B= 0$	80		V
$V_{CER(SUS)}$	Collector-Emitter Sustaining Voltage	$I_C= 100\text{mA}; R_{BE}= 2.2\text{k}\Omega$	80		V
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage	$I_C= 4\text{A}; I_B= 16\text{mA}$		2.0	V
$V_{BE(sat)}$	Base-Emitter Saturation Voltage	$I_C= 4\text{A}; I_B= 16\text{mA}$		2.8	V
$V_{BE(on)}$	Base-Emitter On Voltage	$I_C= 4\text{A}; V_{CE}= 3\text{V}$		2.8	V
I_{CER}	Collector Cutoff current	$V_{CE}= 54\text{V}; R_{BE}= 2.2\text{K}\Omega$		5.0	mA
I_{EBO}	Emitter Cut-off current	$V_{EB}= 5\text{V}; I_C= 0$		3.0	mA
h_{FE}	DC Current Gain	$I_C= 4\text{A}; V_{CE}= 3\text{V}$	1000	20000	
C_{OB}	Output Capacitance	$I_E= 0; V_{CB}= 10\text{V}; f_{test}= 1.0\text{MHz}$		200	pF