


PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [1712921108](#)
Status: **Active**
Overview: [Impact™ Backplane Connectors and Cable Assemblies](#)
Description: Impact™ 100 Ohm 3 Pair Vertical Backplane Header, Unguided, Open Endwall, 10 Columns, 90 Circuits, Pin Length 5.50mm, Plated Through Hole Dimension 0.39mm, MAPS, Lead Free

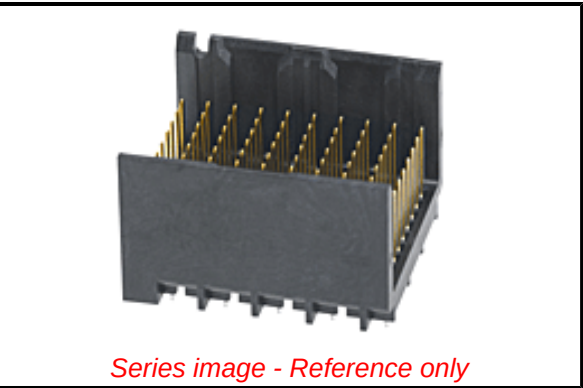

Series image - Reference only

Documents:
[Drawing \(PDF\)](#) [Application Specification AS-76060-9999-001 \(PDF\)](#)
[Product Specification PS-76060-999-001 \(PDF\)](#) [Packaging Specification PK-70873-7700 \(PDF\)](#)
[Application Specification AS-76060-990-001 \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification	
UL	E29179
General	
Product Family	Backplane Connectors
Series	171292
Application	Conventional
Application Tooling Documents	TM-622018799
Component Type	PCB Header
Overview	Impact™ Backplane Connectors and Cable Assemblies
Product Name	Impact™
Style	N/A
UPC	889056014465
Physical	
Circuits (Loaded)	90
Circuits (maximum)	90
Color - Resin	Black
Durability (mating cycles max)	200
First Mate / Last Break	No
Flammability	94V-0
Guide to Mating Part	No
Keying to Mating Part	None
Material - Metal	High Performance Alloy (HPA)
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	2.101/g
Number of Columns	10
Number of Pairs	3
Number of Rows	9
Orientation	Vertical
PC Tail Length	1.40mm
PCB Locator	No
PCB Retention	None
PCB Thickness - Recommended	1.00mm
Packaging Type	Tray
Pitch - Mating Interface	1.90mm
Pitch - Termination Interface	1.90mm
Plating min - Mating	0.762µm
Polarized to PCB	No
Stackable	No
Temperature Range - Operating	-55°C to +85°C
Termination Interface: Style	Through Hole - Compliant Pin

EU ELV Not Relevant	
EU RoHS Compliant REACH SVHC Not Contained Per -ED/01/2017 (12 January 2017) Halogen-Free Status Low-Halogen Need more information on product environmental compliance? Email productcompliance@molex.com Please visit the Contact Us section for any non-product compliance questions.	China RoHS China ROHS Green Image ELV Not Relevant RoHS Phthalates Not Contained

Search Parts in this Series 171292 Series									
Mates With 76170 Impact™ Daughtercard Receptacle									
Application Tooling FAQ <i>Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.</i> Global <table><tr><th>Description</th><th>Product #</th></tr><tr><td>Backplane Module</td><td>0622018647</td></tr><tr><td>Installation, Press-In</td><td></td></tr><tr><td>Tool</td><td></td></tr></table>		Description	Product #	Backplane Module	0622018647	Installation, Press-In		Tool	
Description	Product #								
Backplane Module	0622018647								
Installation, Press-In									
Tool									

Electrical

Current - Maximum per Contact	0.75A
Data Rate	25.0 Gbps
Impedance	100Ω
Shield Type	N/A
Shielded	No
Voltage - Maximum	30V AC (RMS)/DC

Solder Process Data

Lead-freeProcess Capability	N/A
-----------------------------	-----

Material Info

Reference - Drawing Numbers

Application Specification	AS-76060-990-001, AS-76060-9999-001
Packaging Specification	PK-70873-7700
Product Specification	PS-76060-999-001
Sales Drawing	SD-171292-0001

This document was generated on 03/06/2017

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION