


SAW Bandpass Filter 201323B



1. Features

- IF bandpass filter
- High attenuation
- Single-ended operation
- DIP Package
- Maximum Storage Temperature Range : -40℃ ~ 85℃
- Electrostatics Sensitive Device (ESD)

2. Package Dimension

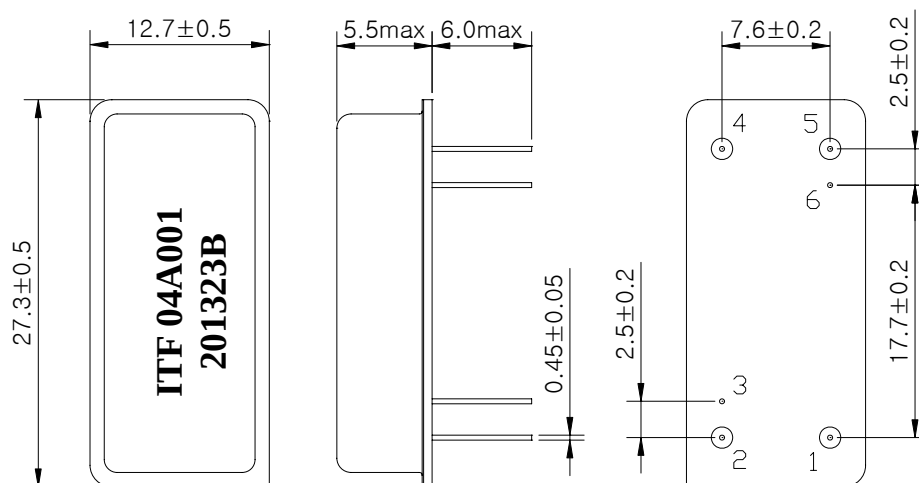

Package : D2712

Dimensions shown are nominal in millimeters

Base : Fe(SPCC), Au plating over Ni plated

Cap : Cu & Cr Alloy, Ni Plated

Termination : Kovar, Au Plated

Pin Configuration

1	Input
5	Output
2, 4	Ground
3, 6	Case ground

 Integrated Technology Future	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	201323B	
		Rev. Date	2004-03-31	
		Rev.	NW3016-CS02	1/5

SAW Bandpass Filter 201323B



3. Specifications

Fo = 140.0 MHz

Terminating source impedance : 50Ω and matching network

Terminating load impedance : 50Ω and matching network

		Minimum	Typical	Maximum
Center Frequency	MHz	-	140.0	-
Insertion Loss	dB	-	23.0	25.0
1dB Bandwidth	MHz	-	5.0	-
3dB Bandwidth	MHz	5.2	5.5	5.6
40dB Bandwidth	MHz	-	7.48	7.8
Amplitude Ripple (Fo +/- 2.2 MHz)	dB	-	0.5	1.0
Group Delay Variation (Fo +/-2.2 MHz)	nsec	-	60	150
Absolute Delay	usec	-	1.6	2.0
Ultimate Rejection	dB	45	50	-
Temperature Coefficient of Frequency	ppm/°C ²	-	-0.03	-

Notes :

- 1) All specifications are based on the matching schematic shown below
- 2) All specifications are measured by Agilent Network analyzer and full 2 port calibration at room temperature
- 3) All attenuation measurements are measured relative to insertion loss


 Integrated Technology Future	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	201323B	
		Rev. Date	2004-03-31	
		Rev.	NW3016-CS02	2/5

SAW Bandpass Filter 201323B



4. Matching Schematic

(Actual matching values may vary due to PCB layout and parasitics)

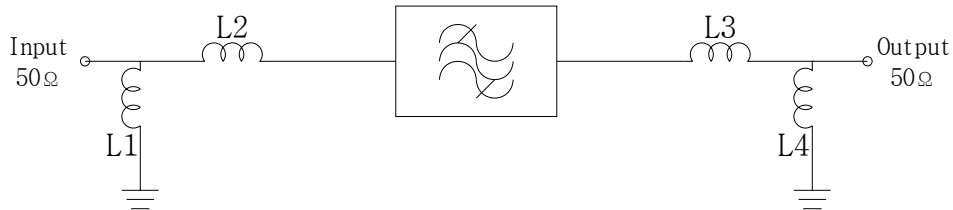

L2 = 68 nH,

L3 = 68 nH

L1 = 39 nH

L4 = 47 nH

5. Marking Configuration

ITF¹⁾ 04A001²⁾

201323B³⁾

1) Manufacturer name

2) Lot Number



3) Part Number

	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	201323B	
		Rev. Date	2004-03-31	
		Rev.	NW3016-CS02	3/5

SAW Bandpass Filter 201323B







6. Typical Performance (at +25℃)

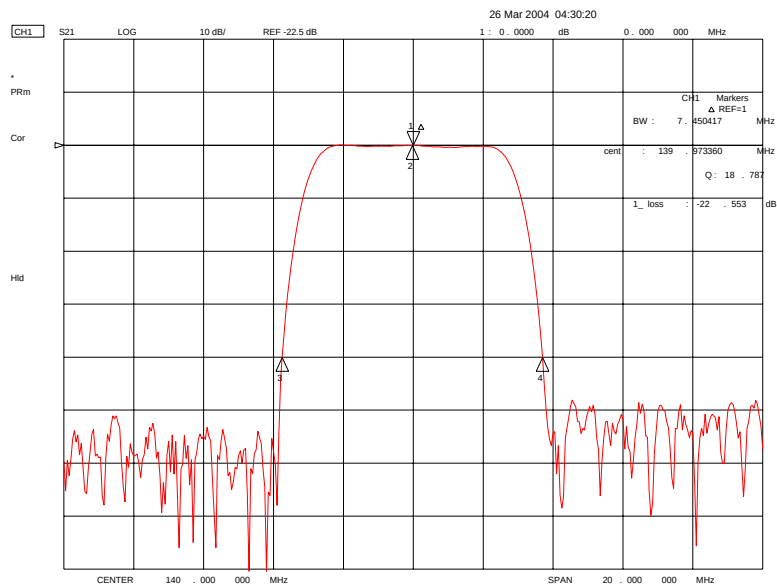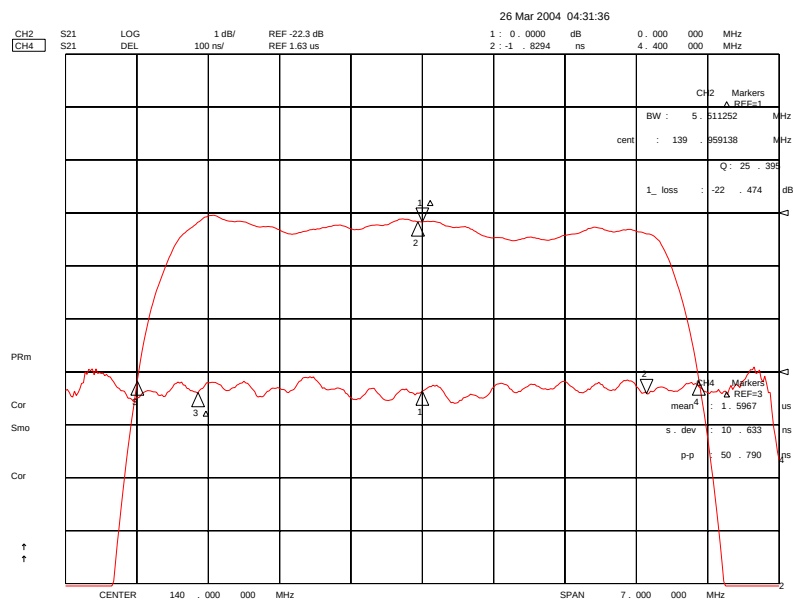

	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	201323B	
		Rev. Date	2004-03-31	
		Rev.	NW3016-CS02	4/5

SAW Bandpass Filter 201323B

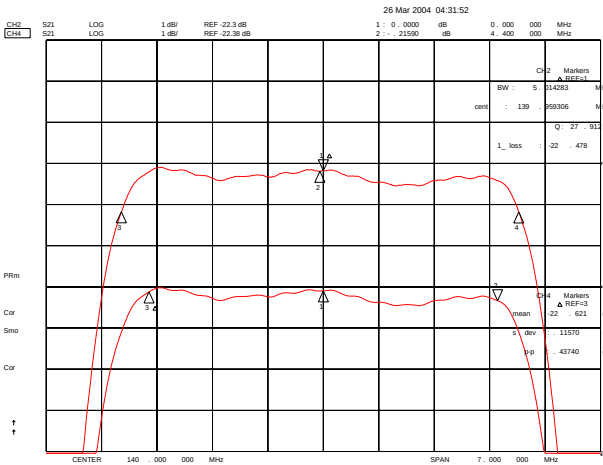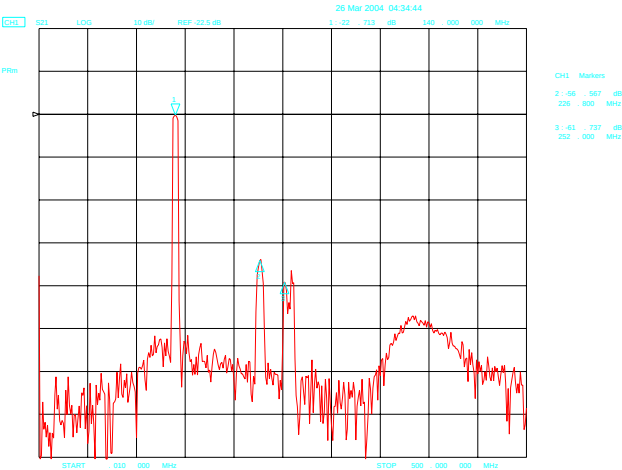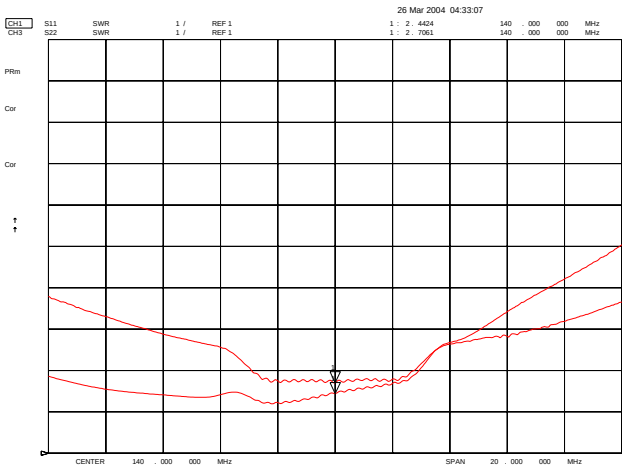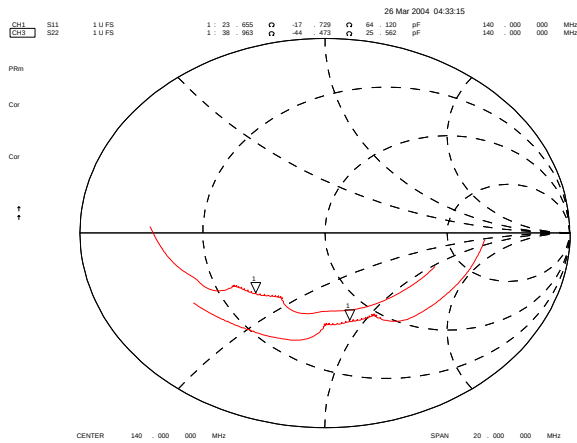

ITF Co., Ltd.
102-901, Bucheon Technopark 364,
Samjeong-Dong, Ojeong-Gu, Bucheon-City,
Gyeonggi-Do, Korea 421-809

Part No.	201323B	
Rev. Date	2004-03-31	
Rev.	NW3016-CS02	5/5