



Reaching new heights through the convergence of applications processors and MCUs

i.MX RT Series of Crossover Processors

Combining high performance with real-time functionality, the i.MX RT series of crossover processors support next-generation IoT applications with a high level of integration and security balanced with MCU-level usability at an affordable price.

APPLICATIONS PROCESSOR PERFORMANCE + MCU USABILITY

- **Move Fast, React Fast** with real-time, low latency response
- **Create Advanced Multimedia** with advanced on-chip integration
- **Connect and Protect** with a high level of security
- **Save Time and Money** by leveraging existing MCU toolchains

TARGET APPLICATIONS


- **Audio Subsystem**—professional microphone, guitar pedals
- **Consumer Products**—Smart appliances, cameras, LCDs
- **Home and Building Automation**—HVAC climate control, security, lighting control panels, IoT gateways
- **Industrial Computing Designs**—EBS, PLCs, factory automation, test and measurement, M2M, HMI control assembly line robotics, QR reader, barcode scanner
- **Motor Control and Power Conversion**—3D printers, thermal printers, unmanned autonomous vehicles, robotic vacuum cleaners

PERFORMANCE HIGHLIGHTS

- Highest performing Arm® Cortex®-M7
 - 3020 CoreMark®/1284 DMIPS @ 600 MHz
- Real-time, low-latency response
 - Up to 512 KB tightly coupled memory (TCM)
 - Fastest real-time response with latency as low as 20 ns

- Low-power operation
 - Industry's lowest dynamic power with integrated DC-DC converter
 - Low-power run modes at 24 MHz

i.MX RT BLOCK DIAGRAM

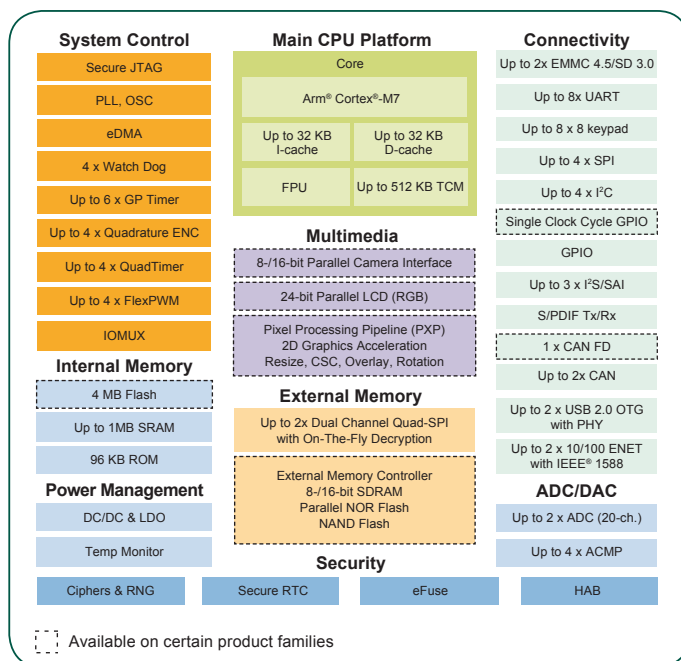

Feature	i.MX RT1010	i.MX RT1015	i.MX RT1020	i.MX RT1050	i.MX RT1060/RT1064
Core/Speed	Cortex-M7 @ 500 MHz	Cortex-M7 @ 500 MHz	Cortex-M7 @ 500 MHz	Cortex-M7 @ 600 MHz	Cortex-M7 @ 600 MHz
Cache	16 KB-I, 8 KB-D	16 KB-I, 16 KB-D	16 KB-I, 16 KB-D	32 KB-I, 32 KB-D	32 KB-I, 32 KB-D
TCM	Up to 128 KB	Up to 128 KB	Up to 256 KB	Up to 512 KB	Up to 512 KB
On-chip Flash	-	-	-	-	Up to 4 MB
On-chip RAM	128 KB	128 KB	256 KB	512 KB	1 MB
External Memory	-	-	8-/16-bit interface for SDRAM, SRAM, NOR, NAND	8-/16-bit interface for SDRAM, SRAM, NOR, NAND	8-/16-bit interface for SDRAM, SRAM, NOR, NAND
SDIO	-	-	SD3.0/eMMC4.5 x 2	SD3.0/eMMC4.5 x 2	SD3.0/eMMC4.5 x 2
QSPI / HyperBus	Dual Channel /8-bit	Dual Channel / 8-bit	Dual-channel/8-bit	Dual-channel/8-bit	Up to 2 x Dual-channel/8-bit
Ethernet	-	-	10/100 Mbit/s x 1	10/100 Mbit/s x 1	10/100 Mbit/s x 2
USB with PHY	OTG, HS/FS x 1	OTG, HS/FS x 1	OTG, HS/FS x 1	OTG, HS/FS x 1	OTG, HS/FS x 1
CAN	-	-	FlexCAN x 2	FlexCAN x 2	FlexCAN x 2 + CANFD x 1
Graphics	-	-	-	PxP for 2D acceleration	PxP for 2D acceleration
CSI	-	-	-	8-/10-/16-bit parallel	8-/10-/16-bit parallel
LCD	-	-	-	8-/16-/18-/24-bit parallel	8-/16-/18-/24-bit parallel
Security	TRNG, AES-128, SHA, Secure Boot	TRNG, AES-128, SHA, Secure Boot	TRNG, AES-128, SHA, Secure Boot	TRNG, AES-128, SHA, Secure Boot	TRNG, AES-128, SHA, Secure Boot
UART/SPI/I ² C	4/2/2	4/2/2	8/4/4	8/4/4	8/4/4
I ² S/SPDIF	2/1	3/1	3/1	3/1	3/1
ADC	1M sample/s x1	1M sample/s x 1	1M sample/s x 2	1M sample/s x 2	1M sample/s x 2
ACMP	-	-	4	4	4
FlexPWM/Quad Timer/Quad ENC	1/0/0	1/1/1	2/2/2	4/4/4	4/4/4
GP Timer / WDOG	3/4	6/4	6/4	6/4	6/4
Package	LQFP - 80	LQFP-100	LQFP-100, LQFP-144	BGA-196	BGA-196
Pin-to-Pin Compatible	-	i.MX RT1020 LQFP-100	i.MX RT1015 LQFP-100	i.MX RT1060/RT1064	i.MX RT1050
Temperature	Consumer: 0 to 95 °C (Tj)	Consumer: 0 to 95 °C (Tj)	Consumer: 0 to 95 °C (Tj)	Consumer: 0 to 95 °C (Tj)	Consumer: 0 to 95 °C (Tj)
	Industrial: -40 to 105 °C (Tj)	Industrial: -40 to 105 °C (Tj)	Industrial: -40 to 105 °C (Tj)	Industrial: -40 to 105 °C (Tj)	Industrial: -40 to 105 °C (Tj)

USABILITY HIGHLIGHTS

Highly Integrated

- ▶ Advanced multimedia for GUI and enhanced HMI
 - 2D graphics acceleration engine
 - Parallel camera sensor interface
 - LCD display controller (up to WXGA 1366 x 768)
 - 3 x I²S for high-performance, multichannel audio
- ▶ Extensive external memory interface options
 - NAND, eMMC, QuadSPI NOR flash, and Parallel NOR flash

- ▶ Wireless connectivity interface for
 - Wi-Fi®, Bluetooth®, BLE, ZigBee® and Thread™

Easy to Use

- ▶ MCU customers can leverage current toolchain
 - MCUXpresso, IAR, Keil®
- ▶ Rapid and easy prototyping and development
 - FreeRTOS™, SDK, Arm® Mbed™, Zephyr™, and the global Arm ecosystem

- ▶ Faster development using low-cost evaluation kit (EVK)
- ▶ Single voltage input simplifies power circuit design

Low BOM Cost

- ▶ Starting from \$0.99 resale
- ▶ DC-DC converter—eliminates need for external PMIC
- ▶ LQFP and BGA packages with optimized pinout for low-cost 2-layer and 4-layer PCB design

www.nxp.com/iMXRT

NXP and the NXP logo are trademarks of NXP B.V. All other product or service names are the property of their respective owners. Arm, Cortex, Keil and Mbed are trademarks or registered trademarks of Arm Limited (or its subsidiaries) in the US and/or elsewhere. The related technology may be protected by any or all of patents, copyrights, designs and trade secrets. All rights reserved. All rights reserved. © 2019 NXP B.V.

Document Number: IMXRTSERIESFS REV 5
Release Date: June 2019