



REVISION HISTORY			
ECO	REV	DESCRIPTION	APPR DATE
-	2	PRODUCTION	EDWIN L. 11-10-10

NOTES: UNLESS OTHERWISE SPECIFIED

1. WORKMANSHIP SHALL BE IN ACCORDANCE WITH IPC-A-610.
2. ASSEMBLY PROCESS SHALL INCLUDE: REFLOW SOLDER SIDE SMD.
MAXIMUM SOLDER TEMPERATURE IS 240 DEGREES CELSIUS.
3. PARTS TO OMIT WILL BE SPECIFIED ON THE BILL OF MATERIALS.
LOCATIONS OF OMITTED PARTS SHALL BE FREE OF SOLDER.
MASK THE SOLDER STENCIL WHERE SMT PARTS ARE OMITTED.
4. INSTALL SHUNTS AS SHOWN ON ASSY DRAWING.
5. DEPANELIZE BOARDS AFTER ASSEMBLY AND ROUTE-OUT THE
BREAKOUT TABS ON FOUR SIDES OF THE BOARD EDGE.
6. DO NOT APPLY ANY KIND OF ASSEMBLY STAMP OR QA STAMP
TO ANY BOARD.

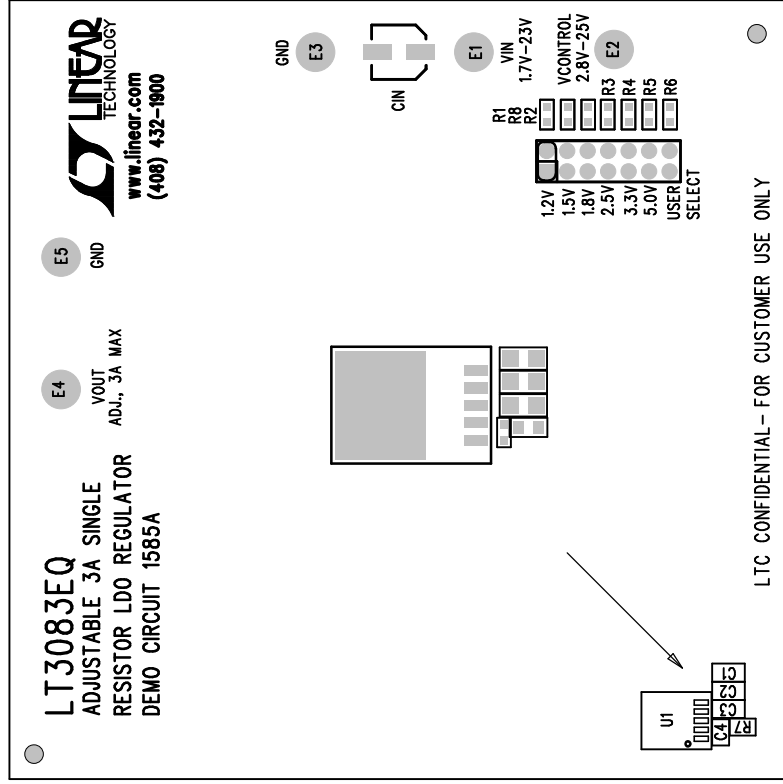

APPROVALS		 1630 MCCARTHY BLVD MILPITAS, CA 95035 PH: (408)432-1900 WWW.linear.com LTC CONFIDENTIAL - FOR CUSTOMER USE ONLY	
PCB DES.	HZ	TITLE: TOP ASSEMBLY DRAWING ADJUSTABLE 3A SINGLE RESISTOR LDO REGULATOR	
APP ENG.	EDWIN L.		
		SIZE IC NO. LT3083EQ REV. N/A DEMO CIRCUIT 1585A 2	
SCALE = NONE		FILENAME: DC1585A-2.PCB SHT 1 OF 1	