



REVISION HISTORY				
ECO	REV	DESCRIPTION	APP. ENG.	DATE
-	0	1ST PROTOTYPE	D. STUETZLE	03-20-15

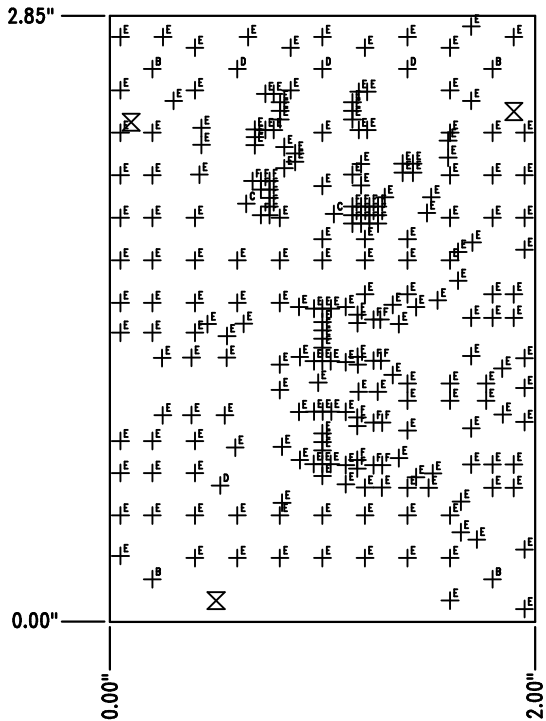

DRILL DRAWING
LINEAR TECHNOLOGY
SINGLE ENDED TO DIFFERENTIAL DRIVER BOARD
DATE: 10-25-16


SIZE	QTY	SYM	PLATED	TOL
0.07	3	⊗	NO	+/-0.003
0.19	4	⊕ ^B	NO	+/-0.003
0.063	2	⊕ ^C	YES	+/-0.003
0.094	4	⊕ ^D	YES	+/-0.003
0.012	209	⊕ ^E	YES	+/-0.003
0.018	37	⊕ ^F	YES	+/-0.003

LAYER STRUCTURE

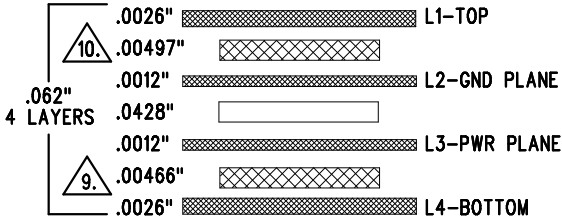



NOTES: UNLESS OTHERWISE SPECIFIED

- FAB PER IPC-A-600.
- MATERIAL: -LEAD FREE ASSEMBLY COMPLIANT, ISOLA FR-370HR OR EQUIVALENT.
-FINISHED THICKNESS TO BE 0.062" +/- .005"
-TOTAL OF 4 LAYERS WITH 2 OZ. CU ON THE OUTER LAYERS AND 1 OZ. CU ON THE INNER LAYERS.
-FLAMMABILITY RATING: 94 V-0 MINIMUM.
- SIZE: CUT TO DIMENSIONS AND TOLERANCES SHOWN.
0.00" ARE PRIMARY DATUMS.
- DRILLING: -DRILL HOLES PER SCHEDULE. PLATE THROUGH HOLES WITH COPPER, 0.001" THICK MIN.
-ALL HOLE SIZES ARE SPECIFIED AFTER PLATING.
-HOLE LOCATION TOLERANCES ARE +/-0.003" IN RELATION TO CENTER
- FINISH: -SMOBC USING LPI BOTH SIDES, COLOR GREEN.
-GOLD IMMERSION BOTH SIDES.
-FOR SILKSCREENS: USE WHITE NON-CONDUCTIVE INK.
- DO NOT ALTER ARTWORK e.g. TO ADD LOGO OR DATE CODE.
PAD SIZE CAN BE MODIFIED TO MEET END FINISH.
- PCBS ARE TO BE RoHS COMPLIANT.
- SCORING DETAIL:



9. SUBJECT TO CHANGE BY MANUFACTURER, DEPENDING ON DIELECTRIC CONSTANT DEVIATIONS. PLEASE CONSULT LTC.

UNLESS OTHERWISE SPECIFIED		APPROVALS		 LINEAR TECHNOLOGY 1630 MCCARTHY BLVD MILPITAS, CA 95035 PH: (408)432-1900 www.linear.com LTC CONFIDENTIAL- FOR CUSTOMER USE ONLY	
DIMENSIONS ARE IN INCHES TOLERANCES: 0.XX" = ±0.01" 0.XXX" = ±0.005" INTERPRET DIM AND TOL PER ASME Y14.5M-1994 THIRD ANGLE PROJECTION		PCB DES.	D. STUETZLE		
		APP ENG.	D. STUETZLE	TITLE: FABRICATION DRAWING SINGLE ENDED TO DIFFERENTIAL DRIVER AMP	
				SIZE N/A	IC NO. TEST CIRCUIT DC2622A
		SCALE = NONE		FILENAME: DC2622A.PCB	REV 0
				SHT 1 OF 1	